



2. CASE 21.052, 9 STIMSON AVENUE, Harry A Waldron House, c1894 (STIMSON AVENUE)

Two and one-half stories faced in grey brick, wood and slate beneath a gambrel roof; panelled entrance porch; picturesque features of Queen Anne Style with some applied Colonial Revival detail.

CONTRIBUTING

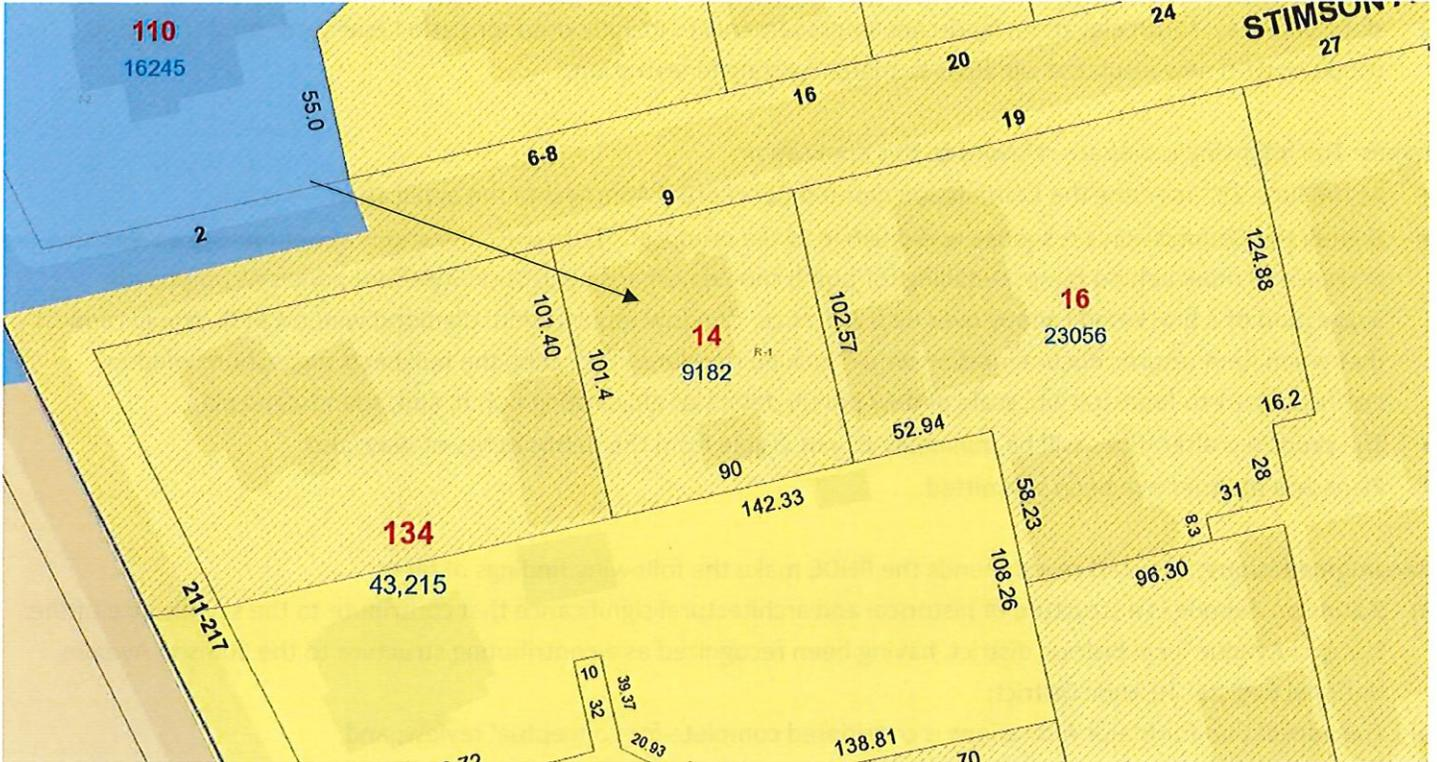

Arrow indicates 9 Stimson Avenue.

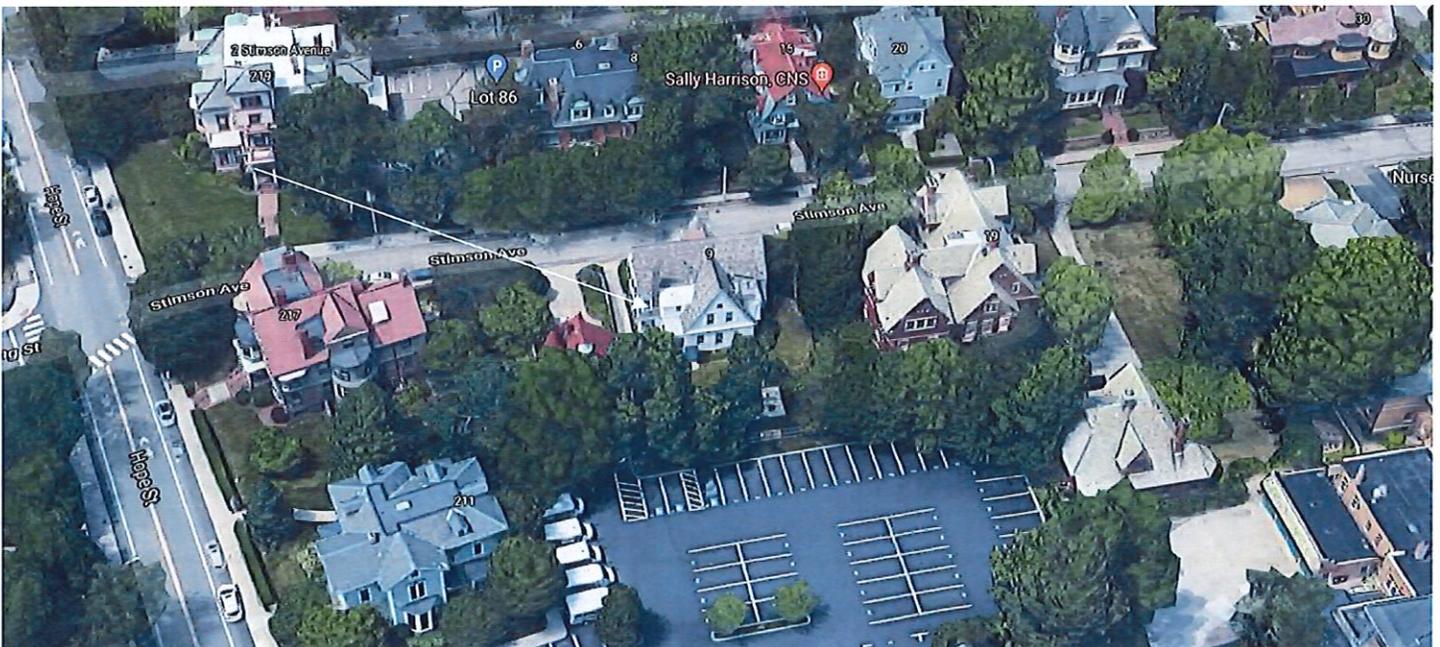

Arrow indicates project location, looking north.



FIGURE 1: North Elevation



FIGURE 2: West Elevation



FIGURE 3: South Elevation



FIGURE 4: East Elevation



FIGURE 5: North Elevation
(First Floor Window)



FIGURE 6: North Elevation (Third Floor Window)



FIGURE 6: West Elevation (First Floor Window)




FIGURE 7: South Elevation
(First Floor Window)



FIGURE 8: South Elevation (Second Floor Window)



FIGURE 8: East Elevation (First Floor Window)

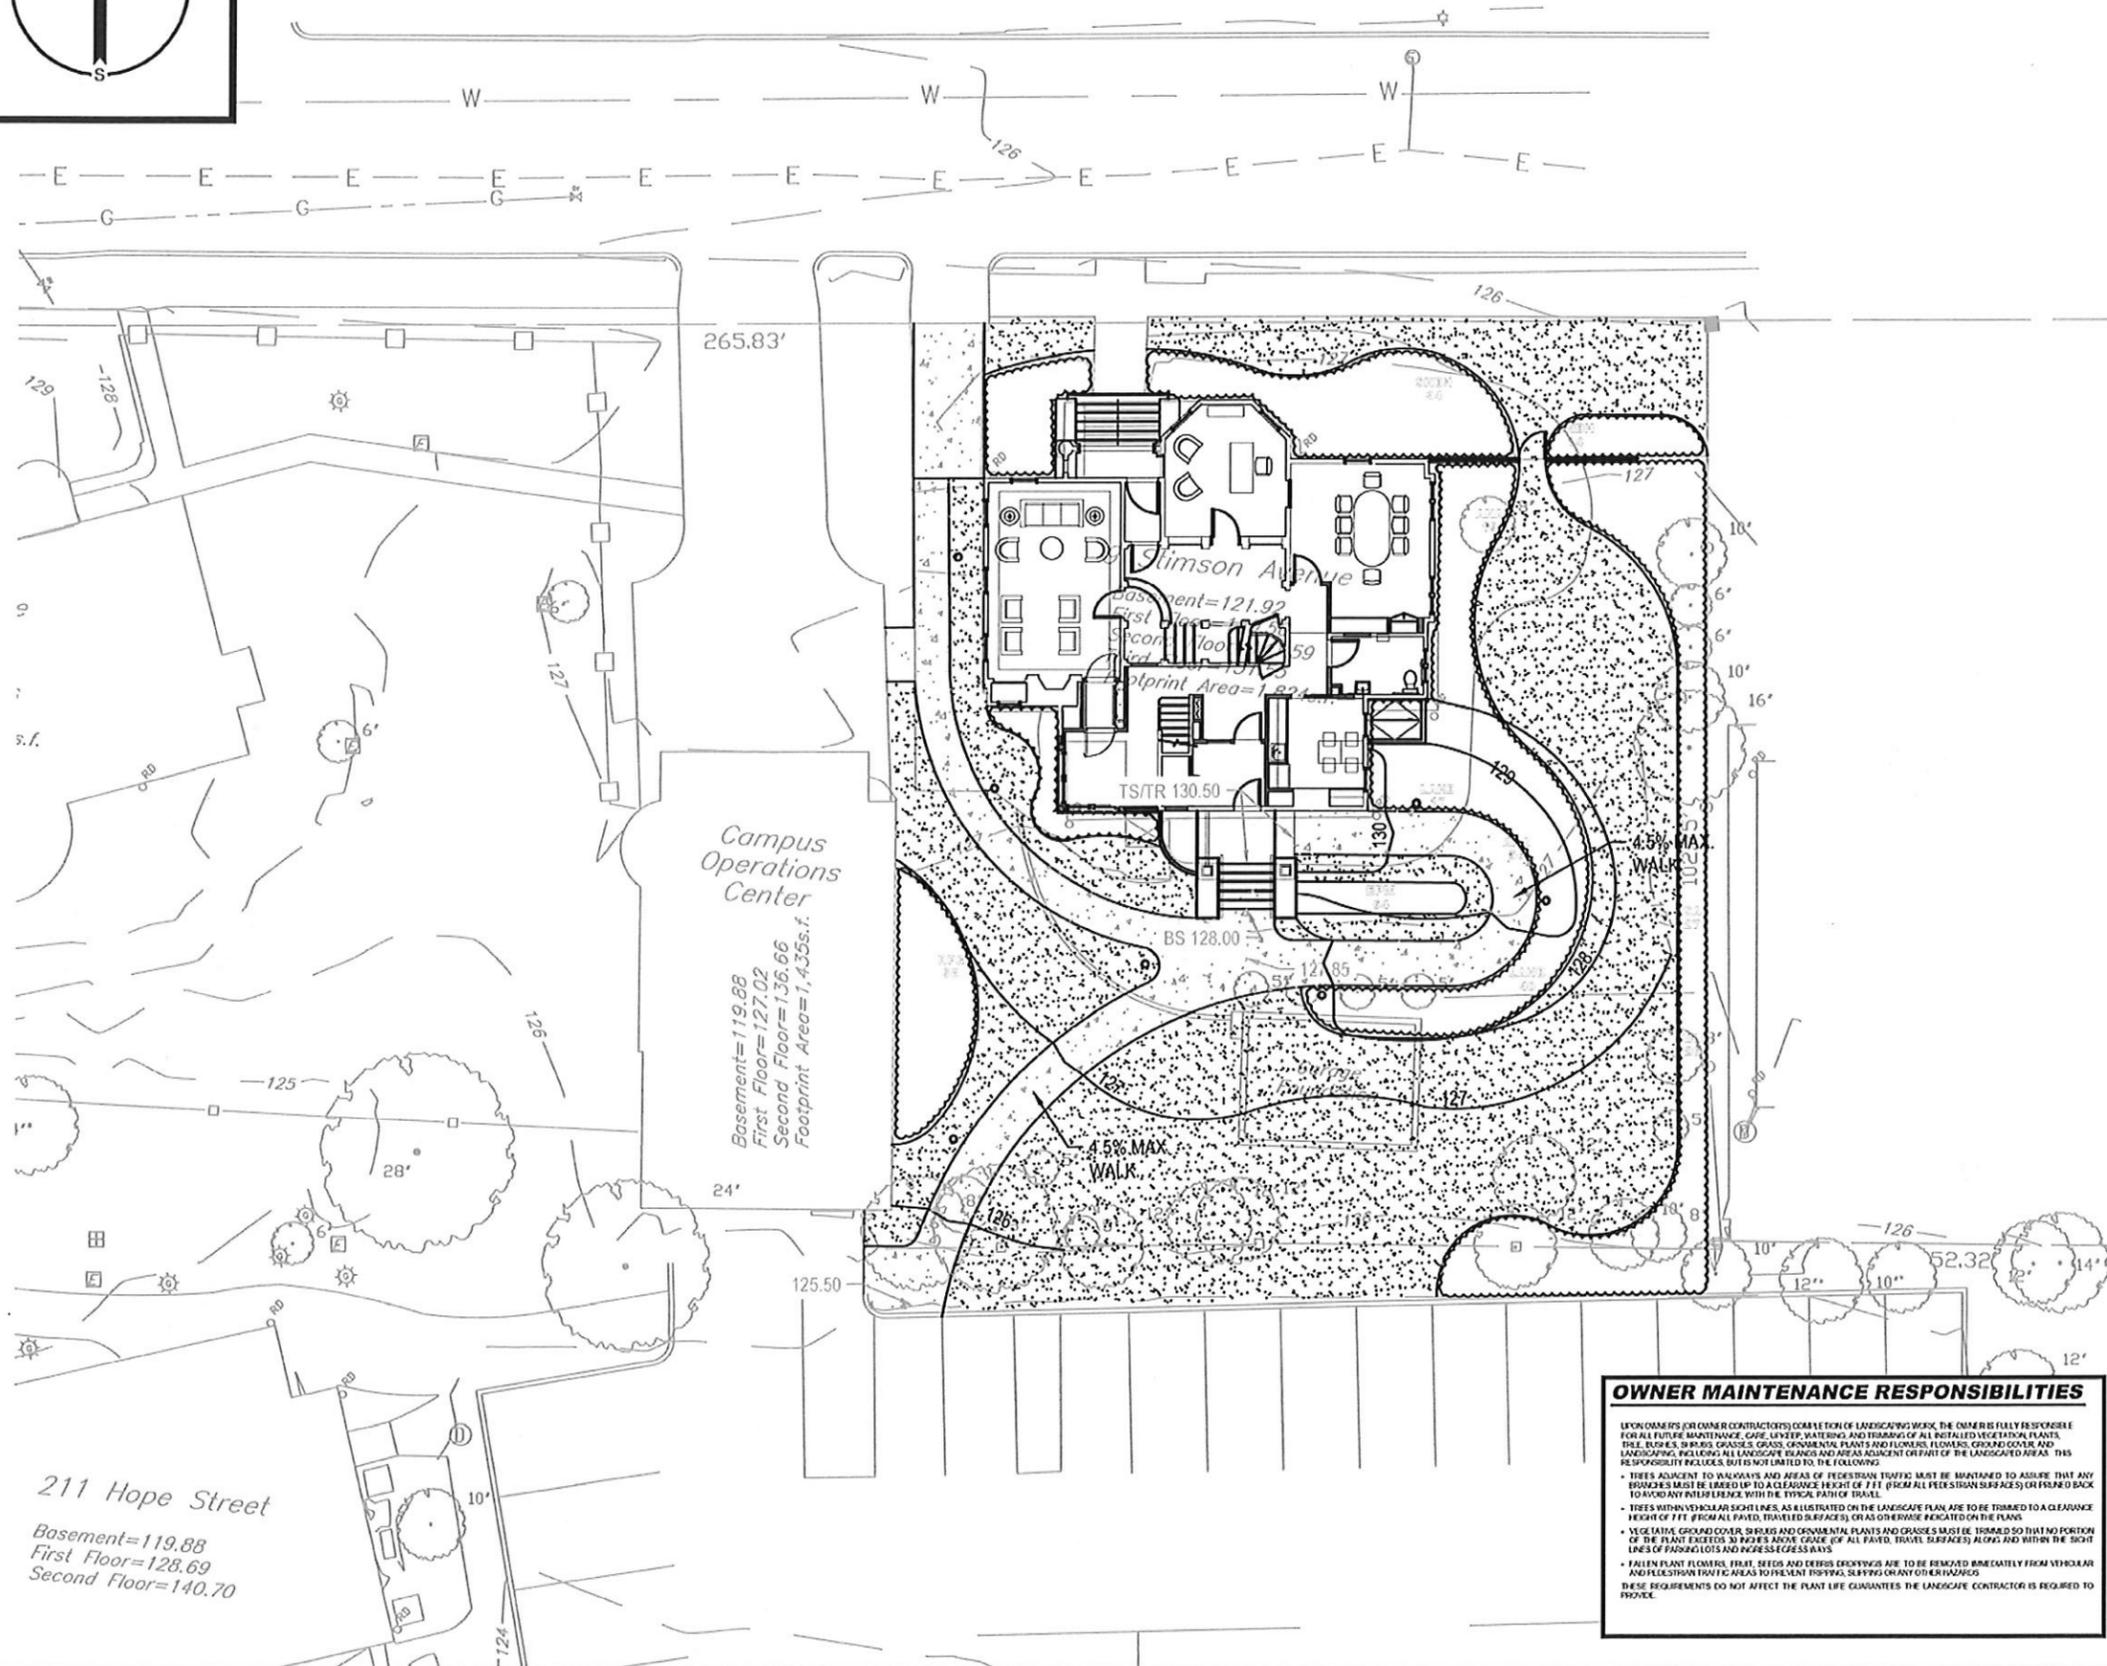

This drawing is copyrighted. Unauthorized use is prohibited.

211 Hope Street
Basement=119.88
First Floor=128.69
Second Floor=140.70

Campus Operations Center
Basement=119.88
First Floor=127.02
Second Floor=136.66
Footprint Area=1,435s.f.


4.5% MAX WALK

OWNER MAINTENANCE RESPONSIBILITIES

UPON COMPLETION OF LANDSCAPING WORK, THE OWNER IS FULLY RESPONSIBLE FOR ALL FUTURE MAINTENANCE, CARE, WATERING AND TRIMMING OF ALL INSTALLED VEGETATION PLANTS, TREES, SHRUBS, GRASSES, GRASS, ORNAMENTAL PLANTS AND FLOWERS, FLOWERS, GROUND COVER AND LANDSCAPING, INCLUDING ALL LANDSCAPE IRRIGATION AND AREAS ADJACENT OR PART OF THE LANDSCAPED AREAS. THIS RESPONSIBILITY INCLUDES, BUT IS NOT LIMITED TO, THE FOLLOWING:
• TREES ADJACENT TO WALKWAYS AND AREAS OF PEDESTRIAN TRAFFIC MUST BE MAINTAINED TO ASSURE THAT ANY BRANCHES MUST BE TRIMMED UP TO A CLEARANCE HEIGHT OF 7 FT. (FROM ALL PEDESTRIAN SURFACES) OR PRUNED BACK TO ADJACENT INTERFERENCE WITH THE TYPICAL PATH OF TRAVEL.
• TREES WITHIN VEHICULAR SIGHT LINES, AS ILLUSTRATED ON THE LANDSCAPE PLAN, ARE TO BE TRIMMED TO A CLEARANCE HEIGHT OF 7 FT. (FROM ALL PAVED, TRAVELED SURFACES) OR AS OTHERWISE INDICATED ON THE PLANS.
• VEGETATION GROUND COVER, SHRUBS AND ORNAMENTAL PLANTS AND GRASSES MUST BE TRIMMED SO THAT NO PORTION OF THE PLANT EXCEEDS 30 INCHES ABOVE GRADE (OF ALL PAVED, TRAVELED SURFACES) ALONG AND WITHIN THE SIGHT LINES OF PARALLEL AND PERPENDICULAR WALKWAYS.
• FALLEN PLANT FLOWERS, FRUIT, SEEDS AND DEBRIS (BRANCHES) ARE TO BE REMOVED IMMEDIATELY FROM VEHICULAR AND PEDESTRIAN TRAFFIC AREAS TO PREVENT TRIPPING, SLIPPING OR ANY OTHER HAZARD.
THESE REQUIREMENTS DO NOT AFFECT THE PLANT LIFE GUARANTEES THE LANDSCAPE CONTRACTOR IS REQUIRED TO PROVIDE.

THIS PLAN TO BE UTILIZED FOR LANDSCAPE PURPOSES ONLY

REFER LANDSCAPE NOTES & DETAILS SHEET FOR LANDSCAPE NOTES AND DETAILS



PRELIMINARY - NOT FOR CONSTRUCTION

GRADING PLAN

SCALE: 1" = 20'

PROJECT # 6218

DATE: 6/8/2021
REVISED DATE:

L-101

Schematic Design for:
9 Stimson Avenue


9 Stimson Avenue
Providence, RI 02906

Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139



MATERIALS PLAN LEGEND

SURFACING AND CURBING			SITE FEATURES AND FURNISHINGS		
KEY	SYMBOL	DESCRIPTION	KEY	SYMBOL	DESCRIPTION
(S1)		SODDED LAWN	(F5)		HANDRAIL AT GRANITE TREAD STAIRS
(S2)		CONCRETE PAVEMENT	(F9)		LIGHT BOLLARD

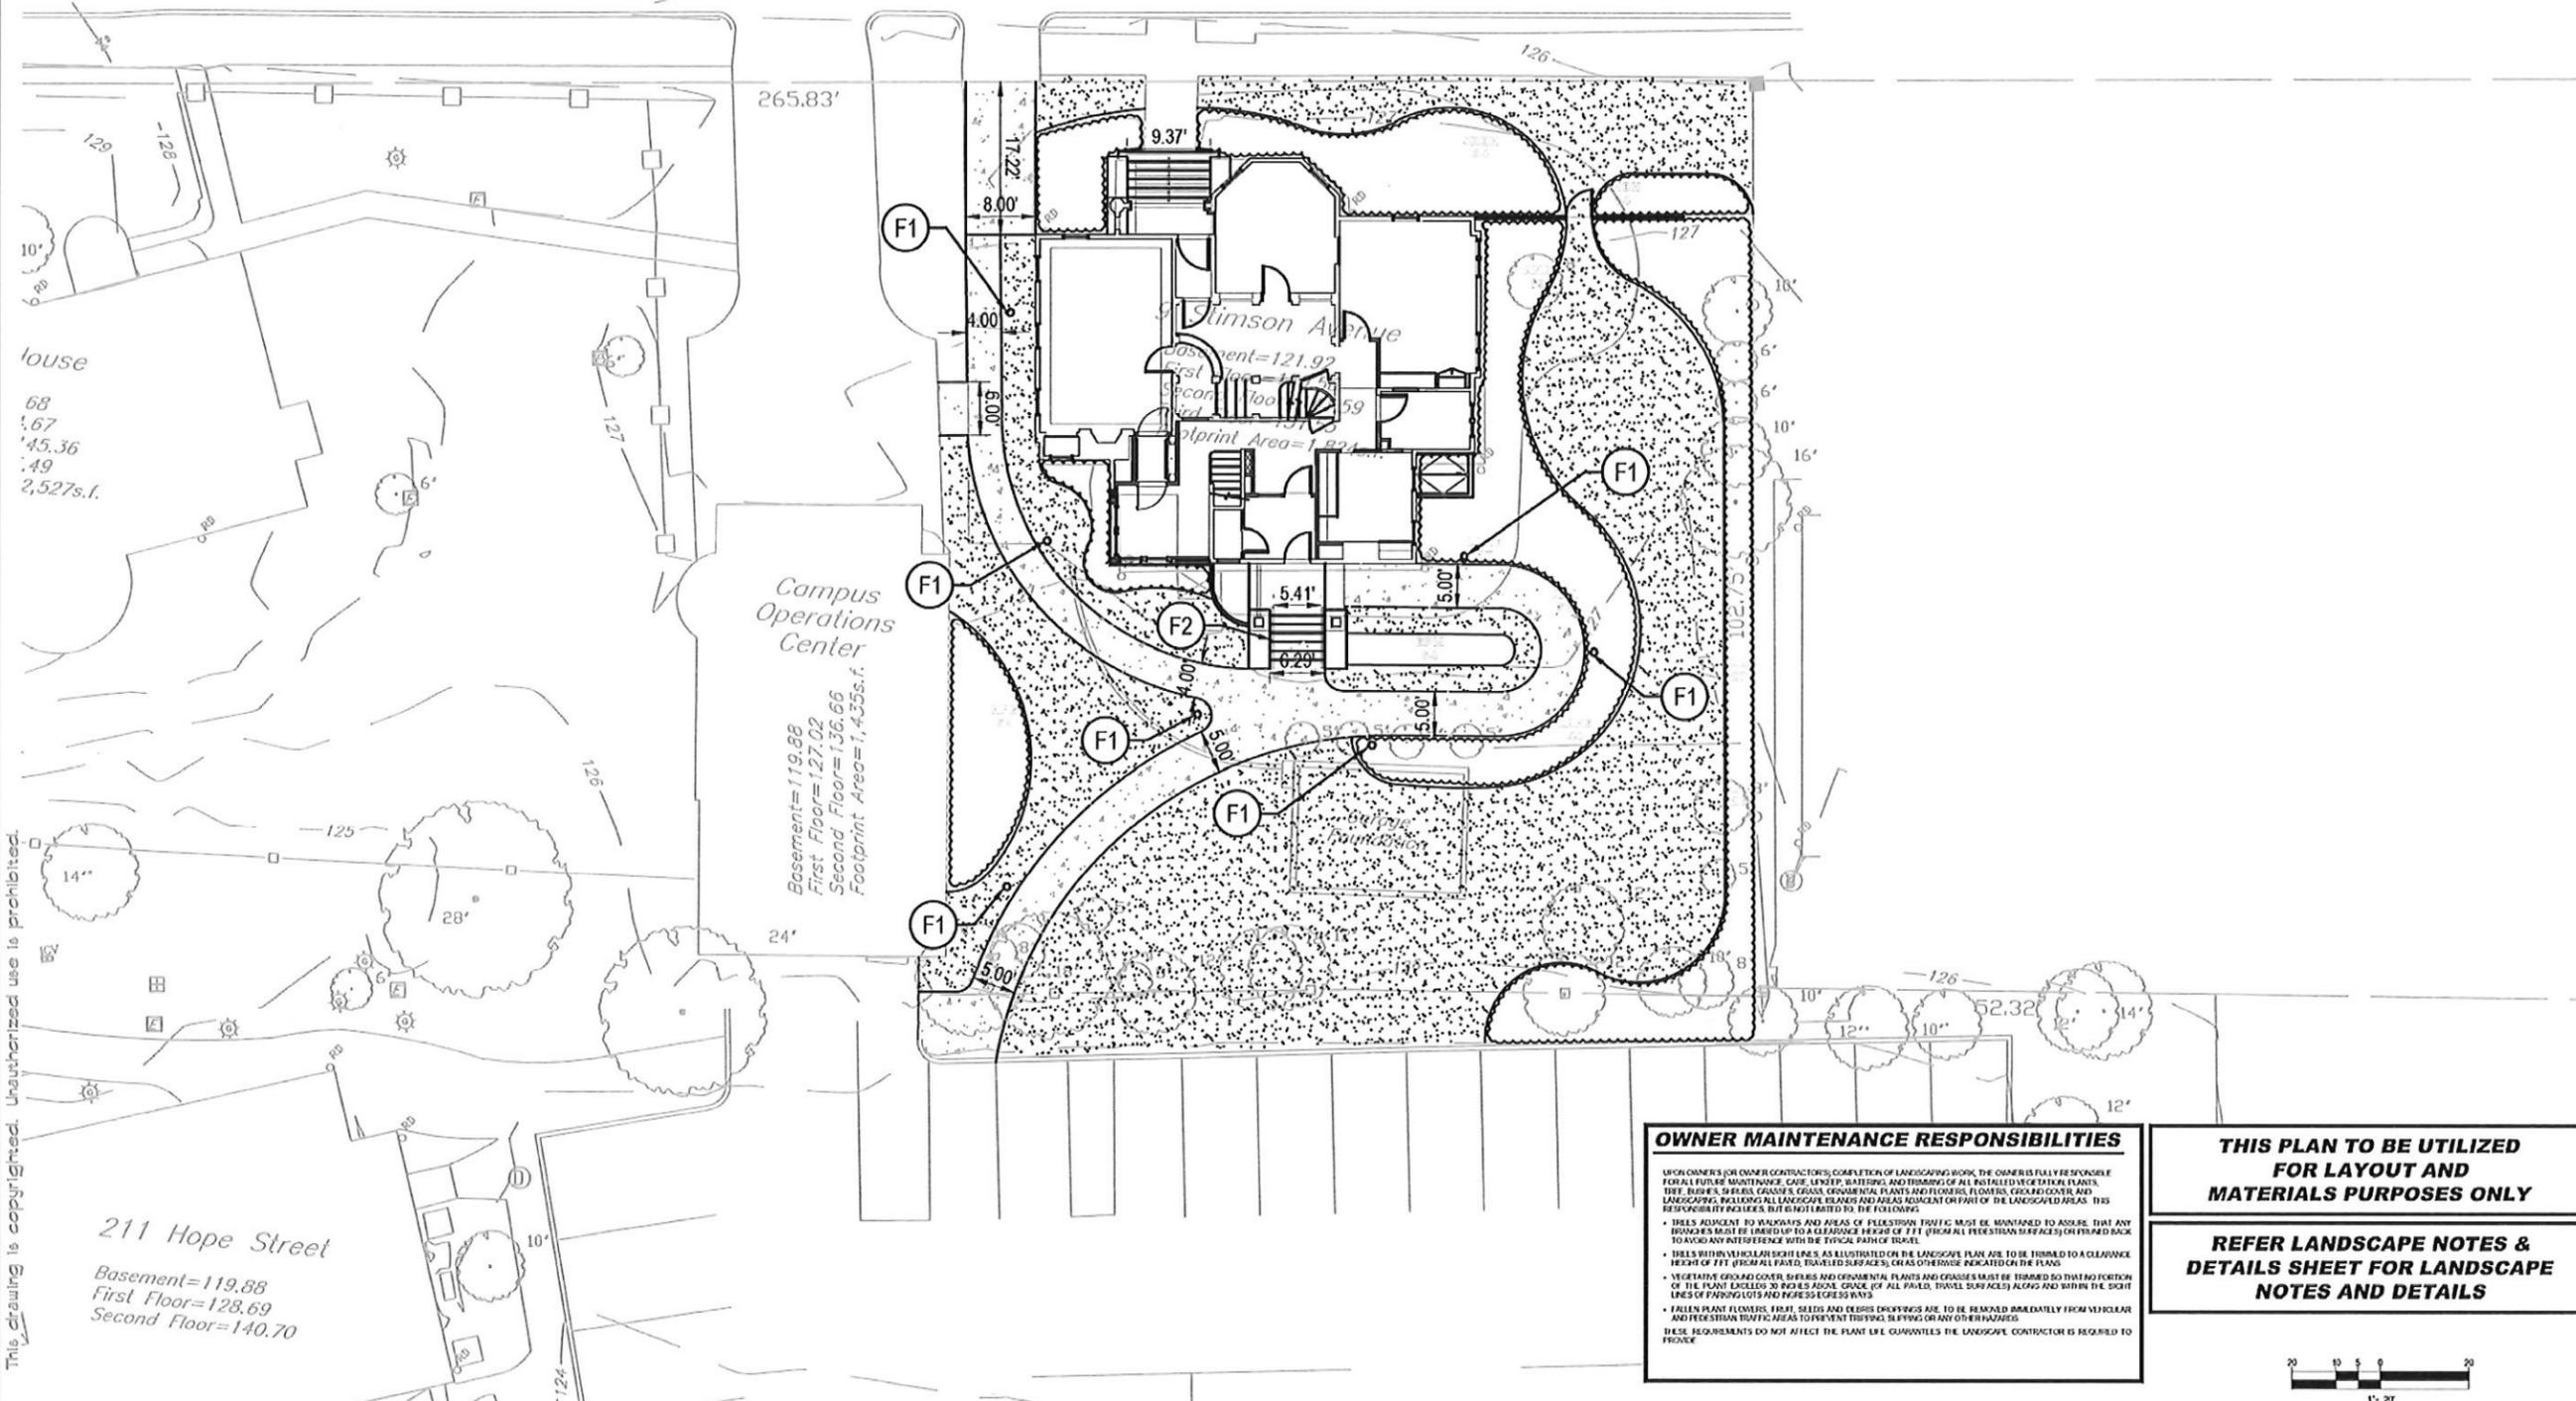

This drawing is copyrighted. Unauthorized use is prohibited.

OWNER MAINTENANCE RESPONSIBILITIES


UPON OWNER'S (OR OWNER CONTRACTOR'S) COMPLETION OF LANDSCAPING WORK, THE OWNER IS FULLY RESPONSIBLE FOR ALL FUTURE MAINTENANCE, CARE, REPLACEMENT, AND TRIMMING OF ALL INSTALLED VEGETATIVE PLANTS, TREES, BUSHES, GRASSES, CRUISES, ORNAMENTAL PLANTS AND FLOWERS, FLOWERS, GRASSES, AND LANDSCAPING, INCLUDING ALL LANDSCAPE ISLANDS AND AREAS ADJACENT OR PART OF THE LANDSCAPED AREAS. THIS RESPONSIBILITY INCLUDES, BUT IS NOT LIMITED TO, THE FOLLOWING:

- TREES ADJACENT TO WALKWAYS AND AREAS OF PEDESTRIAN TRAFFIC MUST BE MAINTAINED TO ASSURE THAT ANY BRANCHES MUST BE TRIMMED UP TO A CLEARANCE HEIGHT OF 7 FT. (TYPICAL PEDESTRIAN SURFACES) OR TRIMMED BACK TO AVOID ANY INTERFERENCE WITH THE TYPICAL PATH OF TRAFFIC.
- TREES WITHIN VEHICULAR SIGHT LINES, AS ILLUSTRATED ON THE LANDSCAPE PLAN, ARE TO BE TRIMMED TO A CLEARANCE HEIGHT OF 7 FT. (TYPICAL PAVED, TRAVELED SURFACES), OR AS OTHERWISE INDICATED ON THE PLAN.
- VEGETATIVE GROUND COVER, BUSHES AND ORNAMENTAL PLANTS AND CRUISES MUST BE TRIMMED SO THAT NO PORTION OF THE PLANT EXCEEDS 20 INCHES ABOVE GRADE FOR ALL PAVED, TRAVELED SURFACES ALONG AND WITHIN THE SIGHT LINES OF PARKING LOTS AND DRIVEWAYS.
- FALLEN PLANT FLOWERS, FRUIT, SEEDS AND FRISPS OR FRISPS ARE TO BE REMOVED IMMEDIATELY FROM VEHICULAR AND PEDESTRIAN TRAFFIC AREAS TO PREVENT TRIPPING, SLIPPING OR ANY OTHER INJURIES.

THESE REQUIREMENTS DO NOT AFFECT THE PLANT LIFE GUARANTEES THE LANDSCAPE CONTRACTOR IS REQUIRED TO PROVIDE.

THIS PLAN TO BE UTILIZED FOR LAYOUT AND MATERIALS PURPOSES ONLY

REFER LANDSCAPE NOTES & DETAILS SHEET FOR LANDSCAPE NOTES AND DETAILS



PRELIMINARY - NOT FOR CONSTRUCTION

Ed Wojcik
architect, ltd
 One Richmond Square
 Providence, RI 02906
 401-861-7139


Schematic Design for:
9 Stimson Avenue
 9 Stimson Avenue
 Providence, RI 02906

LAYOUT AND MATERIALS PLAN
 SCALE: 1" = 20'

PROJECT # 6218

DATE: 6/8/2021
 REVISED DATE:

L-102

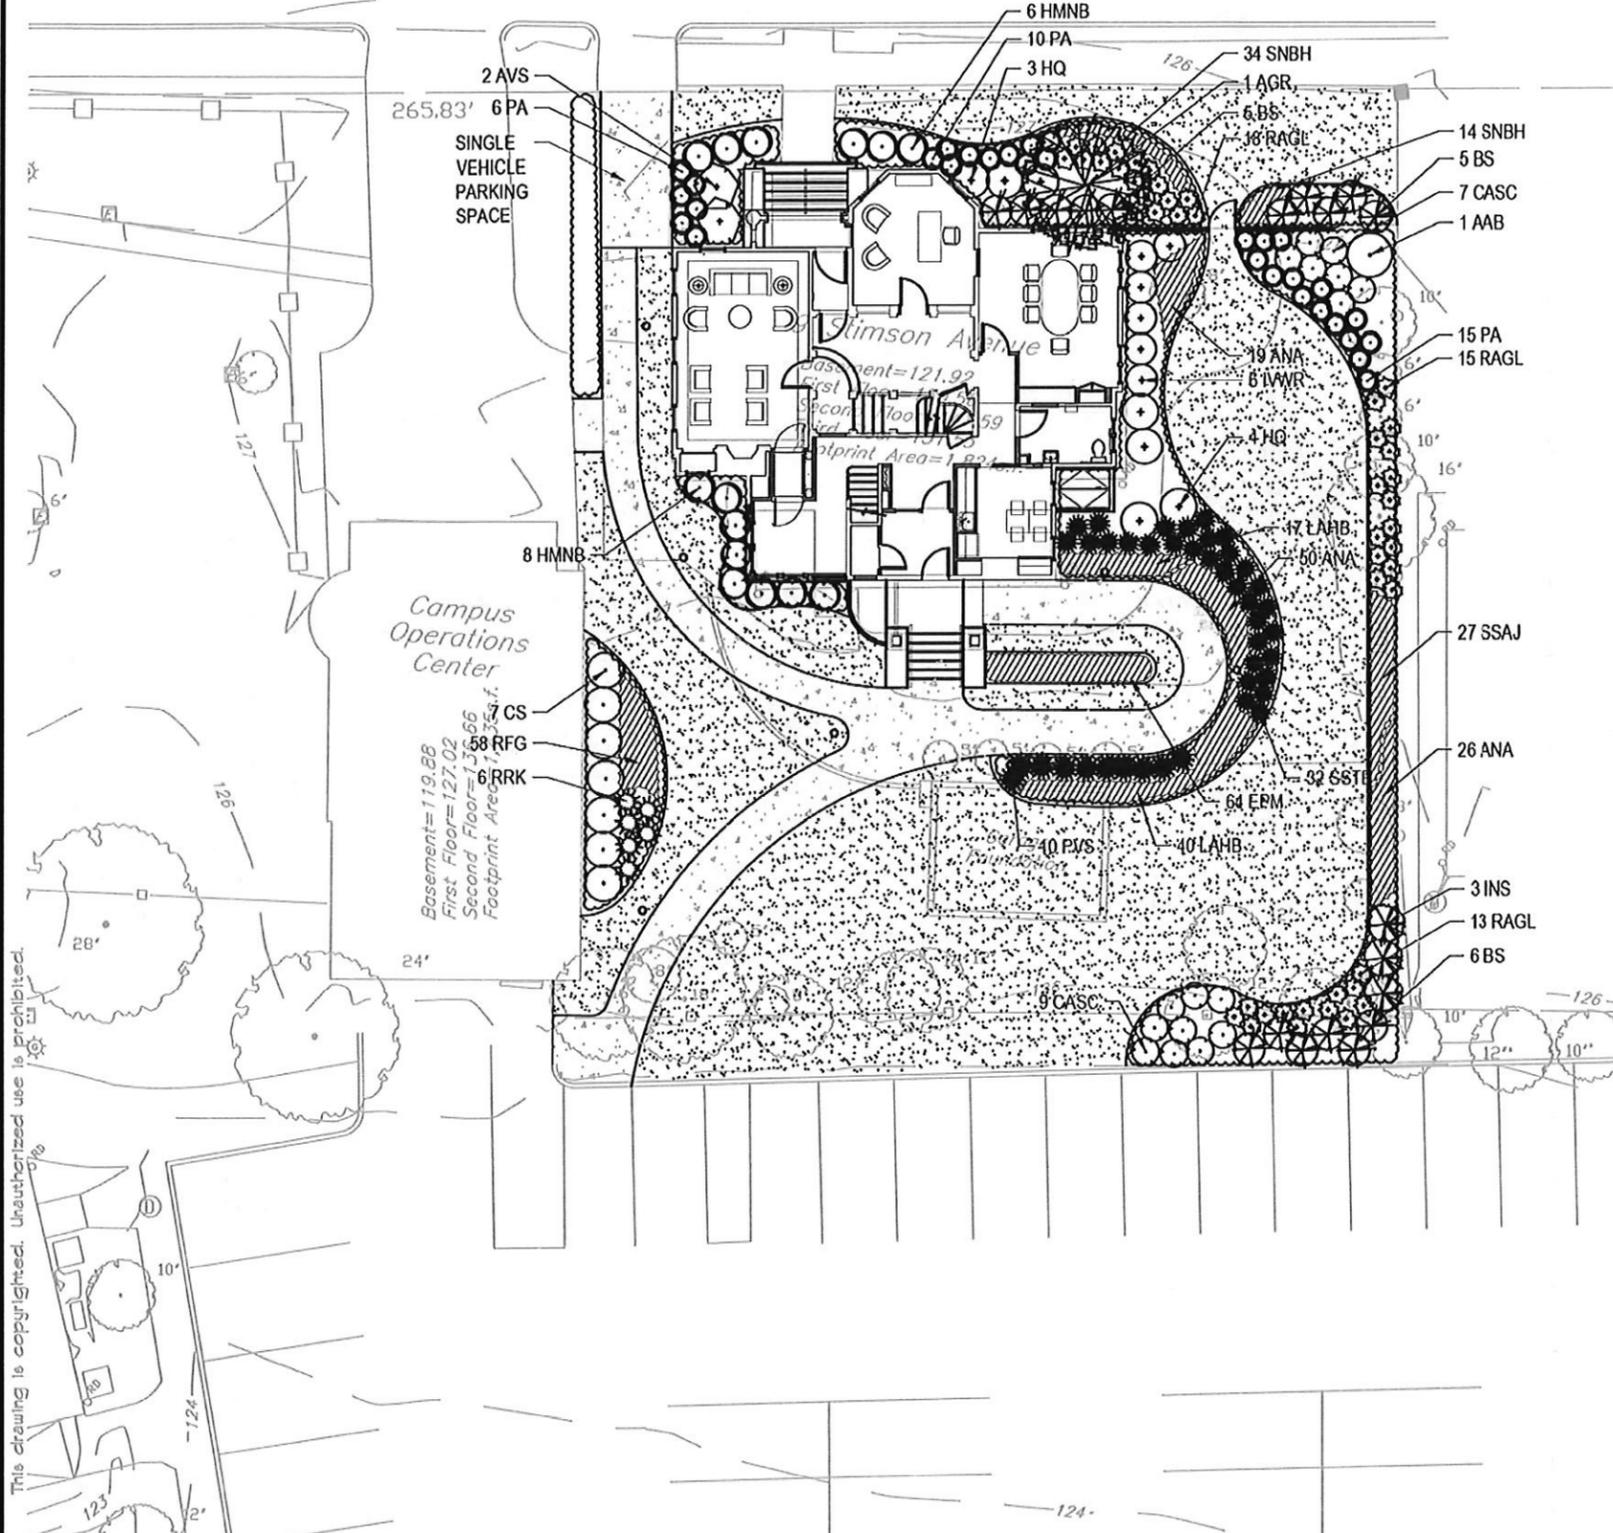

LANDSCAPE SCHEDULE

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	CONT.
ORNAMENTAL TREES					
AGR	1	ACER GRISEUM	PAPERBARK MAPLE	8-10'	B+B
SUBTOTAL:	1				
DECIDUOUS SHRUBS					
AAB	1	ARONIA ARBUTIFOLIA 'BRILLIANTISSIMA'	RED CHOKEBERRY	3-4'	B+B
AVS	2	AZALEA VISCOSUM 'WESTON'S SPARKLER'	WESTON'S SPARKLER AZALEA HYBRID	30-36"	B+B
CASC	16	CLETHRA ALNIFOLIA 'SIXTEEN CANDLES'	SUMMERSWEET CLETHRA	24-30"	CONTAINER
CS	7	CORNUS SERICEA (FORMERLY STOLONIFERA)	RED OSIER DOGWOOD	2-3'	B+B
HMNB	14	HYDRANGEA MACROPHYLLA 'NIKKO BLUE'	NIKKO BLUE HORTENSIA HYDRANGEA	18-24"	CONTAINER
HQ	7	HYDRANGEA QUERCIFOLIA	OAKLEAF HYDRANGEA	24-30"	CONTAINER
IVWR	6	ILEX VERTICILLATA 'WINTER RED'	WINTER RED WINTERBERRY HOLLY	30-36"	CONTAINER
RAGL	46	RHUS AROMATICA 'GRO-LOW'	GRO-LOW SUMAC	1 GAL.	CONTAINER
RRK	6	ROSA 'RADRAZZ' KNOCK OUT	KNOCK OUT ROSE	24-30"	CONTAINER
SUBTOTAL:	105				
EVERGREEN SHRUBS					
BS	16	BUXUS SEMPERVIRENS	COMMON BOXWOOD	30-36"	B+B
INH	3	ILEX X 'NELLIE R. STEVENS'	NELLIE STEVENS HOLLY	4-5'	B+B
SUBTOTAL:	19				
PERENNIALS					
ANA	95	ASTER NOVAE-ANGLIAE	NEW ENGLAND ASTER	2 GAL.	CONTAINER
EPM	64	ECHINACEA PURPUREA 'MAGNUS'	MAGNUS CONEFLOWER	2 GAL.	CONTAINER
LAHB	58	LAVANDULA ANGUSTIFOLIA 'HIDCOTE BLUE'	HIDCOTE BLUE LAVENDER	2 GAL.	CONTAINER
RFG	58	RUDBECKIA FULGIDA 'GOLDSTURM'	GOLDSTURM/BLACK-EYED SUSAN	2 GAL.	CONTAINER
SNBH	48	SALVIA NEMEROSA 'BLUE HILL'	BLUE HILL MEADOW SAGE	2 GAL.	CONTAINER
SSAJ	27	SEDUM SPECTABILE 'AUTUMN JOY'	AUTUMN JOY SEDUM	2 GAL.	CONTAINER
SUBTOTAL:	350				
ORNAMENTAL GRASSES					
PA	31	PENNISETUM ALOPECUROIDES	FOUNTAIN GRASS	2 GAL.	CONTAINER
PVS	10	PANICUM VIRGATUM 'SHENANDOAH'	SHENANDOAH SWITCH GRASS	2 GAL.	CONTAINER
SSBT	32	SCHIZACHYRIUM SCOPARIUM 'THE BLUES'	LITTLE BLUE STEM	2 GAL.	CONTAINER
SUBTOTAL:	73				

This drawing is copyrighted. Unauthorized use is prohibited.

OWNER MAINTENANCE RESPONSIBILITIES

UPON OWNERS (OR OWNER CONTRACTOR'S) COMPLETION OF LANDSCAPING WORK, THE OWNER IS FULLY RESPONSIBLE FOR ALL FUTURE MAINTENANCE, CARE, UNCLEP, WATERING, AND TRIMMING OF ALL INSTALLED VEGETATION PLANTS. THESE REQUIREMENTS INCLUDE: GRASSES, GRASSES, CONIFERS, PLANTS AND FLOWERS, FLOWERS, GROUND COVER, AND LANDSCAPING, INCLUDING ALL LANDSCAPE ISLANDS AND AREAS ADJACENT OR PART OF THE LANDSCAPED AREAS. THIS RESPONSIBILITY INCLUDES BUT IS NOT LIMITED TO, THE FOLLOWING:


- TREES ADJACENT TO WALKWAYS AND AREAS OF FOOTSTRAFFIC TRAFFIC MUST BE MAINTAINED TO ASSURE THAT ANY BRANCHES MUST BE TRIMMED UP TO A CLEARANCE HEIGHT OF 7 FT. (FROM ALL PEDESTRIAN SURFACES) OR TRIMMED BACK TO AVOID ANY INTERFERENCE WITH THE TYPICAL PATH OF TRAFFIC.
- TREES WITHIN VEHICLE SIGHT LINES, AS ILLUSTRATED ON THE LANDSCAPE PLAN, ARE TO BE TRIMMED TO A CLEARANCE HEIGHT OF 7 FT. (FROM ALL PAVED, TRAVELLED SURFACES) OR AS OTHERWISE INDICATED ON THE PLANS.
- VEGETATIVE GROUND COVER, SHRUBS AND ORNAMENTAL PLANTS AND GRASSES MUST BE TRIMMED SO THAT NO PORTION OF THE PLANT EXCEEDS 30 INCHES ABOVE GROUND. TRIMMING SHALL BE PERFORMED ALONG AND WITHIN THE SIGHT LINES OF PARKING LOTS AND WALKWAYS.
- FALLEN PLANT FLOWERS, FRUIT, SEEDS AND DEBRIS DEPOSITED ARE TO BE REMOVED IMMEDIATELY FROM VEHICULAR AND PEDESTRIAN TRAFFIC AREAS TO PREVENT TRIPPING, SLIPPING OR ANY OTHER HAZARDS.

THESE REQUIREMENTS DO NOT AFFECT THE PLANT LIFE GUARANTEE. THE LANDSCAPE CONTRACTOR IS REQUIRED TO PROVIDE.

ALL VEGETATED AREAS TO BE IRRIGATED

THIS PLAN TO BE UTILIZED FOR LANDSCAPE PURPOSES ONLY

REFER LANDSCAPE NOTES & DETAILS SHEET FOR LANDSCAPE NOTES AND DETAILS



PRELIMINARY - NOT FOR CONSTRUCTION

PLANTING PLAN

SCALE: 1" = 20'

PROJECT # 6218

DATE: 6/8/2021
REVISED DATE:

L-103

Schematic Design for:
9 Stimson Avenue

9 Stimson Avenue
Providence, RI 02906

Ed Wojcik
architect, ltd

One Richmond Square
Providence, RI 02906
401-861-7139

LANDSCAPE SPECIFICATIONS

1 SCOPE OF WORK
 11 THE LANDSCAPE CONTRACTOR SHALL BE REQUIRED TO PERFORM ALL CLEARING, FINISHED GRADING, SOIL PREPARATION, PERMANENT SEEDING OR SOILING, PLANTING AND MAINTENANCE INCLUDING ALL LABOR, MATERIALS, TOOLS AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THIS PROJECT, UNLESS OTHERWISE SPECIFIED BY THE GENERAL CONTRACTOR.

2 MATERIALS

21 GENERAL - ALL HARDSCAPE MATERIALS SHALL MEET OR EXCEED SPECIFICATIONS AS OUTLINED IN THE STATE DEPARTMENT OF TRANSPORTATION'S SPECIFICATIONS.
 22 TOPSOIL - NATURAL, FERTILE, LOAMY SILT SOIL HAVING AN ORGANIC CONTENT NOT LESS THAN 5%, A PH RANGE BETWEEN 6.5 TO 7.0 IT SHALL BE FREE OF DEBRIS, ROCKS LARGER THAN 100MM (4"), WOOD ROOTS, VEGETABLE MATTER AND CLAY CLONES.
 23 LAWN - ALL EXPOSED AREAS ARE TO BE TREATED WITH A MINIMUM 1" THICK LAYER OF TOPSOIL. GRASS SPECIES BY THE LOCAL ORDINANCE OR CLIENT, AND SEEDED OR SOILED IN ACCORDANCE WITH THE PERMANENT STABILIZATION METHODS INDICATED ON THE LANDSCAPE PLAN.
 231 LAWN SEED MIXTURE SHALL BE FRESH, CLEAN NEW CRIP SEED.
 232 SOIL SHALL BE STRONGLY ROOTED, WITH ENDLESS FIRST FIBER WITH AN AVERAGE THICKNESS .500" INSTALLED ON SLOPES GREATER THAN 4:1 SHALL BE FEGGED TO HOLD SOIL IN PLACE.
 24 MULCH - ALL PLANTING BEDS SHALL BE MULCHED WITH A 2" THICK LAYER OF DOUBLE SHREDED HARDWOOD BARK MULCH, UNLESS OTHERWISE STATED ON THE LANDSCAPE PLAN AND/OR LANDSCAPE PLAN NOTES DETALS.
 25 FERTILIZER

251 FERTILIZER SHALL BE DELIVERED TO THE SITE MIXED AS SPECIFIED IN THE ORIGINAL UNOPENED STANDARD BAGS SHOWING WEIGHT ANALYSIS AND NAME OF MANUFACTURER. FERTILIZER SHALL BE STORED IN A WEATHERPROOF PLACE SO THAT IT CAN BE KEPT DRY PRIOR TO USE.
 252 FOR THE PURPOSE OF MIXING, ASSUME THAT FERTILIZER SHALL BE 10% NITROGEN, 6% PHOSPHORUS AND 4% POTASSIUM BY WEIGHT. A FERTILIZER SHOULD NOT BE SELECTED WITHOUT A SOIL TEST PERFORMED BY A CERTIFIED SOIL LABORATORY.
 26 PLANT MATERIAL

261 ALL PLANTS SHALL IN ALL CASES CONFORM TO THE REQUIREMENTS OF THE "AMERICAN STANDARD FOR NURSERY STOCK" (ANSI Z60.1), LATEST EDITION, AS PUBLISHED BY THE AMERICAN NURSERY & LANDSCAPE ASSOCIATION (FORMERLY THE AMERICAN ASSOCIATION OF NURSERMEN).
 262 IN ALL CASES, BOTANICAL NAMES SHALL TAKE PRECEDENCE OVER COMMON NAMES FOR ANY AND ALL PLANT MATERIAL.
 263 PLANTS SHALL BE LEGIBLY TAGGED WITH THE PROPRIETARY AND SIZE TAGS ARE TO REMAIN ON AT LEAST ONE PLANT OF EACH SPECIES FOR VERIFICATION PURPOSES DURING THE FINAL INSPECTION.
 264 TREES WITH ABRASION OF THE BARK, SUN SCALDS, DISFIGURATION OR FRESH CUTS OF LIMBS OVER 1/2" WHICH HAVE NOT BEEN COMPLETELY CALLED, SHALL BE REJECTED. PLANTS SHALL NOT BE BOUND WITH WIRE OR ROPE AT ANY TIME, SO AS TO DAMAGE THE BARK OR BRANCHES.

265 ALL PLANTS SHALL BE TYPICAL OF THEIR SPECIES OR VARIETY AND HAVE A NORMAL HIGHT OF GROWTH, WELL DEVELOPED BRANCHES, ESPECIALLY CAULIS, WOODS ROOT SYSTEMS AND BE FREE OF DISEASE, PESTS, INSECTS, TESTES, LESIONS OR DAMAGE.
 266 CALIPER MEASUREMENTS OF NURSERY GROWN TREES SHALL BE TAKEN AT A POINT ON THE TRUNK SIX INCHES (6") ABOVE THE NATURAL GRADE (FOR TREES UP TO AND INCLUDING 4" CALIPER SIZE). IF THE CALIPER AT SIX INCHES IS ABOVE THE NATURAL GRADE EXCEEDS FOUR INCHES (4") CALIPER, THE CALIPER SHOULD BE MEASURED AT A POINT 12" ABOVE THE NATURAL GRADE.
 267 SHRUBS SHALL BE MEASURED TO THE AVERAGE HEIGHT OR SPREAD OF THE SHRUB, AND NOT TO THE LONGEST BRANCH.
 268 TRIPS AND SHRUBS SHALL BE HANDLED WITH CARE BY THE ROOT BALL.

3 GENERAL WORK PROCEDURES
 31 CONTRACTOR TO UTILIZE WORKMANLIKE INDUSTRY STANDARDS IN ALL PHASES OF CONSTRUCTION. THE SITE IS TO BE LEFT IN A CLEAN STATE AT THE END OF EACH WORKDAY. ALL DEBRIS, MATERIALS AND TOOLS SHALL BE PROPERLY STORED, STOCKPILED OR DISPOSED OF.
 32 WASTE MATERIALS AND DEBRIS SHALL BE COMPLETELY DISPOSED OF AT THE CONTRACTOR'S EXPENSE. DEBRIS SHALL NOT BE BURIED, INCLUDING ORGANIC MATERIALS, BUT SHALL BE REMOVED COMPLETELY FROM THE SITE.

4 SITE PREPARATIONS
 41 BEFORE AND DURING PRELIMINARY GRADING AND FINISHED GRADING, ALL WEEDS AND GRASSES SHALL BE DUG OUT BY THE ROOTS AND DISPOSED OF IN ACCORDANCE WITH GENERAL WORK PROCEDURES OUTLINED HEREIN.
 42 ALL EXISTING TREES TO REMAIN SHALL BE PRUNED TO REMOVE ANY DAMAGED BRANCHES. THE ENTIRE LIMB OF ANY DAMAGED BRANCH SHALL BE CUT OFF AT THE BRANCH COLLAR. CONTRACTOR SHALL ENSURE THAT CUTS ARE SMOOTH AND STRAIGHT. ANY EXPOSED ROOTS SHALL BE CUT BACK WITH CLEAN SHARP TOOLS AND TOPSOIL SHALL BE PLACED AROUND THE REMAINDER OF THE ROOTS. EXISTING TREES SHALL BE MARKED ON A REGULAR BASIS FOR EACH ROOT OR BRANCH DAMAGE AS A RESULT OF CONSTRUCTION. ROOTS SHALL NOT BE LEFT EXPOSED FOR MORE THAN ONE (1) DAY. CONTRACTOR SHALL WATER EXISTING TREES AS NEEDED TO PREVENT SHOCK OR DECLINE.
 43 CONTRACTOR SHALL ARRANGE TO HAVE A UTILITY STAKE OUT TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO INSTALLATION OF ANY LANDSCAPE MATERIAL. UTILITY COMPANIES SHALL BE CONTACTED THREE (3) DAYS PRIOR TO THE BEGINNING OF WORK.

5 TREE PROTECTION
 51 CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING TREES TO REMAIN. A TREE PROTECTION ZONE SHALL BE ESTABLISHED AT THE DRAINAGE OR AT THE LIMIT OF CONSTRUCTION DISTURBANCE, WHICHEVER IS GREATER. LOCAL STANDARDS THAT MAY REQUIRE A MORE STRICT TREE PROTECTION ZONE SHALL BE HONORED.
 52 A FORTY EIGHT (48") HIGH WOODEN SNOW FENCE OR ORANGE COLORED HIGH DENSITY "YISH FENCE" OR APPROVED EQUAL MOUNTED ON STEEL POSTS SHALL BE PLACED ALONG THE BOUNDARY OF THE TREE PROTECTION ZONE. POSTS SHALL BE LOCATED AT A MAXIMUM OF EIGHT FEET (8') ON CENTER OR AS INDICATED WITHIN THE TREE PROTECTION DETAIL.
 53 WHEN THE TREE PROTECTION FENCING HAS BEEN INSTALLED, IT SHALL BE INSPECTED BY THE APPROVING AGENCY PRIOR TO DEMOLITION, GRADING, TREE CLEARING OR ANY OTHER CONSTRUCTION. THE FENCING ALONG THE TREE PROTECTION ZONE SHALL BE REGULARLY INSPECTED BY THE LANDSCAPE CONTRACTOR AND MAINTAINED UNTIL ALL CONSTRUCTION ACTIVITY HAS BEEN COMPLETED.
 54 AT NO TIME SHALL MACHINERY, DEBRIS, FALLEN TREES OR OTHER MATERIALS BE PLACED, STOCKPILED OR LEFT STANDING IN THE TREE PROTECTION ZONE.

6 SOIL MODIFICATIONS
 61 CONTRACTOR SHALL ATTAIN A SOIL TEST FOR ALL AREAS OF THE SITE PRIOR TO CONDUCTING ANY PLANTING. SOIL TESTS SHALL BE PERFORMED BY A CERTIFIED SOIL LABORATORY.
 62 LANDSCAPE CONTRACTOR SHALL REPORT ANY SOIL OR DRAINAGE CONDITIONS CONSIDERED DETRIMENTAL TO THE GROWTH OF PLANT MATERIAL. SOIL MODIFICATIONS AS SPECIFIED HEREIN, MAY NEED TO BE CONDUCTED BY THE LANDSCAPE CONTRACTOR DEPENDING ON THE CONDITIONS.
 63 THE FOLLOWING AMENDMENTS AND QUANTITIES ARE APPROXIMATE AND ARE FOR GUIDANCE PURPOSES ONLY. COMPOSITION OF AMENDMENTS SHOULD BE REVISED DEPENDING ON THE OUTCOME OF A TOPSOIL ANALYSIS PERFORMED BY A CERTIFIED SOIL LABORATORY.

631 TO INCREASE A SANDY SOIL'S ABILITY TO RETAIN WATER AND NUTRIENTS, THOROUGHLY FILL ORGANIC MATTER INTO THE TOP 6" - 12" USE COMPOSTED BARK, COMPOSTED LEAF MULCH OR PEAT MOSS. ALL PRODUCTS SHOULD BE COMPOSTED TO A DARK COLOR AND BE FREE OF PIECES WITH EITHER WOOD LEAF OR WOOD STRUCTURE. AVOID MATERIAL WITH A HIGHTER THAN 7/8"
 632 TO INCREASE DRAINAGE, INJECT HEAVY CLAY OR SILT (MORE THAN 40% CLAY OR SILT) BY ADDING COMPOSTED PINE BARK (UP TO 30% BY VOLUME) AND/OR AGRICULTURAL GYPSSUM. COARSE SAND MAY BE USED IF EMPOACH IS KNOWN TO IMPROVE THE SAND CONTENT TO MORE THAN 50% OF THE TOTAL MIX. SUBSURFACE DRAINAGE LINES MAY NEED TO BE ADDED TO INCREASE DRAINAGE.
 633 MOOY EXTREMELY SANDY SOILS (MORE THAN 80% SAND) BY ADDING ORGANIC MATTER AND/OR FERT. SHREDED CLAY LOAM UP TO 30% OF THE TOTAL MIX.

7 FINISHED GRADING
 71 UNLESS OTHERWISE CONTRACTED, THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF TOPSOIL AND THE ESTABLISHMENT OF FINE GRADING WITHIN THE DISTURBANCE AREA OF THE SITE.
 72 LANDSCAPE CONTRACTOR SHALL VERIFY THAT SUBGRADE FOR INSTALLATION OF TOPSOIL HAS BEEN ESTABLISHED. THE SUBGRADE OF THE SITE MUST MEET THE FINISHED GRADE LESS THE REQUIRED TOPSOIL THICKNESS (1 1/2").
 73 ALL LAWN AND PLANTING AREAS SHALL BE GRADED TO A SMOOTH, EVEN AND UNIFORM PLANE WITHIN ADEQUATE CHANGE OF SURFACE AS DEPICTED WITHIN THIS SET OF CONSTRUCTION PLANS UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER OR LANDSCAPE ARCHITECT.
 74 ALL PLANTING AREAS SHALL BE GRADED AND MAINTAINED TO ALLOW FREE FLOW OF SURFACE WATER IN AND AROUND THE PLANTING BEDS. STANDING WATER SHALL NOT BE PERMITTED IN PLANTING BEDS.

8 TOPSOILING
 81 CONTRACTOR SHALL PROVIDE A 2" THICK MINIMUM LAYER OF TOPSOIL, OR AS DIRECTED BY THE LOCAL ORDINANCE OR CLIENT, IN ALL PLANTING AREAS. TOPSOIL SHOULD BE SPREAD OVER PREPARED SURFACE IN A UNIFORM LAYER TO ACHIEVE THE DESIRED COMPACTED THICKNESS.
 82 ON SITE TOPSOIL MAY BE USED TO SUPPLEMENT THE TOTAL AMOUNT REQUIRED. TOPSOIL FROM THE SITE MAY BE REJECTED IF IT HAS BEEN IMPROVED BY REBARRETT, STORED AND PROTECTED FROM ROCK STRATIFICATION.
 83 CONTRACTOR SHALL FURNISH TO THE APPROVING AGENCY AN ANALYSIS OF BOTH IMPORTED AND ON-SITE TOPSOIL, TO BE UTILIZED IN ALL PLANTING AREAS. THE PH AND NUTRIENT LEVELS MAY NEED TO BE ADJUSTED THROUGH SOIL MODIFICATIONS AS NEEDED TO ACHIEVE THE REQUIRED LEVELS AS SPECIFIED IN THE MATERIALS SECTION ABOVE.
 84 ALL LAWN AREAS ARE TO BE CULTIVATED TO A DEPTH OF SIX INCHES (6"). ALL DEBRIS EXPOSED FROM EXCAVATION AND CULTIVATION SHALL BE DISPOSED OF IN ACCORDANCE WITH GENERAL WORK PROCEDURES SECTION ABOVE. THE FOLLOWING SHALL BE TILTED INTO THE TOP FOUR INCHES (4") IN TWO DIRECTIONS (QUANTITIES BASED ON A 1,000 SQUARE FOOT AREA). FOR BID PURPOSES ONLY (SEE SPECIFICATIONS A.4).

841 20 POUNDS 50% POWER OR APPROVED SOIL CONDITIONER PER TON
 842 20 POUNDS NITROGEN (COARSE) 30-0-0 BLUE CHIP OR APPROVED NITROGEN FERTILIZER
 85 THE SPREADING OF TOPSOIL SHALL NOT BE CONDUCTED UNDER MUDDY OR FROZEN CONDITIONS.

9 PLANTING
 91 INSURE THAT IF IT IS FEASIBLE, PLANT MATERIAL SHALL BE PLANTED ON THE DAY OF DELIVERY. IN THE EVENT THAT THIS IS NOT POSSIBLE, LANDSCAPE CONTRACTOR SHALL PROTECT UNINSTALLED PLANT MATERIAL. PLANTS SHALL NOT BE MOUND PLANTED FOR LONGER THAN A THREE DAY PERIOD AFTER DELIVERY. PLANTS THAT WILL NOT BE PLANTED FOR PERIOD OF TIME GREATER THAN THREE DAYS SHALL BE HEALED IN WITH TOPSOIL OR MULCH TO HELP PRESERVE ROOT MOISTURE.
 92 PLANTING OPERATIONS SHALL BE PERFORMED DURING PERIODS WITHIN THE PLANTING SEASON WHEN WEATHER AND SOIL CONDITIONS ARE SUITABLE AND IN ACCORDANCE WITH ACCEPTED LOCAL PRACTICE. PLANTS SHALL NOT BE INSTALLED IN TOPSOIL THAT IS IN A STATE OF FROZE OR CRACKED.
 93 ANY PLANTED TREES OR SHRUBS SHALL BE PRUNED TO MOVE CLEAN CUT ENDS PRIOR TO PLANTING UTILIZING CLEAN, SHARP TOOLS. ONLY MINOR DISCREPANCY BRANCHING SHALL BE REMOVED.
 94 ALL PLANTING CONTAINERS, BASKETS AND NON-BIODEGRADABLE MATERIALS SHALL BE REMOVED FROM ROOT BALLS PRIOR TO PLANTING. PLANTING MATERIALS SHALL BE HEALED IN WITH TOPSOIL OR MULCH TO HELP PRESERVE ROOT MOISTURE.
 95 POSITION TREES AND SHRUBS AT THEIR INTENDED LOCATIONS AS PER THE PLANS AND SECURE THE APPROVAL OF THE LANDSCAPE ARCHITECT PRIOR TO EXCAVATING PITS, MAKING NECESSARY ADJUSTMENTS AS DIRECTED.
 96 PRIOR TO THE ISSUANCE OF ANY CERTIFICATE OF OCCUPANCY, THE PROPOSED LANDSCAPE, AS SHOWN ON THE APPLICABLE LANDSCAPE PLAN, MUST BE INSTALLED, INSPECTED AND APPROVED BY THE APPROVING AGENCY. THE APPROVING AGENCY SHALL TAKE INTO ACCOUNT SEASONAL CONSIDERATIONS IN THIS REGARDS. THE PLANTING OF TREES, SHRUBS, VINES OR GROUND COVER SHALL OCCUR ONLY DURING THE FOLLOWING PLANTING SEASONS:
 961 PLANTS: MARCH 15 TO DECEMBER 15
 962 LAWN: MARCH 15 TO JUNE 15 OR SEPT. 1 TO DECEMBER 1
 963 PLANTINGS REQUIRED FOR A CERTIFICATE OF OCCUPANCY SHALL BE PROVIDED DURING THE NEXT APPROPRIATE SEASON AT THE MUNICIPALITY'S DISCRETION. CONTRACTOR SHOULD CONTACT APPROVING AGENCY FOR POTENTIAL SUBSTITUTIONS.
 97 FURTHERMORE, THE FOLLOWING TREE VARIETIES ARE UNUSUALLY SUSCEPTIBLE TO WINTER DAMAGE. WITH TRANSPLANT SHOCK AND THE SEASONAL LACK OF NITROGEN AVAILABILITY, THE RISK OF PLANT DEATH IS GREATLY INCREASED. IT IS NOT RECOMMENDED THAT THESE SPECIES BE PLANTED DURING THE FALL PLANTING SEASON.

ACER RUBRUM	PLATANUS ACERIFOLIA
BETULA VARIETIES	POPULUS VARIETIES
CARPINUS VARIETIES	FRAXINUS VARIETIES
CRATAEGUS VARIETIES	PRUNUS VARIETIES
KOELERUTERA	QUERCUS VARIETIES
LIGUSTRUM STRYCHALIA	TRILIA TORENTOSA
LYCODOENDRON FLORIDIPYLA	ZITIKOVIA VARIETIES

98 PLANTING PITS SHALL BE DUG WITH LEVEL BOTTOMS, WITH THE WIDTH TWICE THE DIAMETER OF ROOT BALL. THE ROOT BALL SHOULD REST ON UNDISTURBED GRADE. EACH PLANT PIT SHALL BE BACKFILLED IN LAYERS WITH THE FOLLOWING PREPARED SOIL MIXED THOROUGHLY:
 981 1 PART PEAT MOSS
 982 1 PART COMPOSTED COW MANURE BY VOLUME
 983 3 PARTS TOPSOIL BY VOLUME
 984 21 GRAMS AGFORM PLANTING TABLETS (OR APPROVED EQUAL) AS FOLLOWS:
 984.1 2 TABLETS PER 1 GALLON PLANT
 984.2 3 TABLETS PER 1 GALLON PLANT
 984.3 4 TABLETS PER 1 GALLON PLANT
 984.4 LARGE PLANTS: 2 TABLETS PER 5" CALIPER OF TRUNK.

99 FILL PREPARED SOIL AROUND BALL OF PLANT HALF WAY AND INSERT PLANT. COMPLETE BACKFILL AND WATER THOROUGHLY.
 100 ALL PLANTS SHALL BE PLANTED SO THAT THE TOP OF THE ROOT BALL, THE POINT AT WHICH THE ROOT FLARE BEGINS, IS AT GROUND LEVEL AND IN THE CENTER OF THE PIT. NO SOIL IS TO BE PLACED DIRECTLY ON TOP OF THE ROOT BALL.
 101 ALL PROPOSED TREES DIRECTLY ADJACENT TO WALKWAYS OR DRIVEWAYS SHALL BE PRUNED AND MAINTAINED TO A MINIMUM BRANCHING HEIGHT OF 7' FROM GROUND.
 102 GROUND COVER AREAS SHALL RECEIVE A 1" LAYER OF FINISH GRADE OVER THE 10" OF PREPARED SOIL PRIOR TO PLANTING. ALL GROUND COVER AREAS SHALL BE WEETED AND TREATED WITH A PRE-EMERGENT CHEMICAL AS PER MANUFACTURER'S RECOMMENDATION.
 103 NO PLANT, EXCEPT GROUND COVERS, GRASSES OR VINES, SHALL BE PLANTED LESS THAN TWO FEET (2') FROM EXISTING STRUCTURES AND SIDEWALKS.
 104 ALL PLANTING AREAS AND PLANTING PITS SHALL BE MULCHED AS SPECIFIED HEREIN TO FILL THE ENTIRE BED AREA OR SAUCER. NO MULCH IS TO TOUCH THE TRUNK OF THE TREE OR SHRUB.
 105 ALL PLANTING AREAS SHALL BE WATERED IMMEDIATELY UPON INSTALLATION IN ACCORDANCE WITH THE WATERING SPECIFICATIONS AS LISTED HEREIN.











10 TRANSPLANTING (WHEN REQUESTED)
 101 ALL TRANSPLANTS SHALL BE DUG WITH INTACT ROOT BALLS CAPABLE OF SUSTAINING THE PLANT.
 102 IF PLANTS ARE TO BE STOCKPILED BEFORE REPLANTING, THEY SHALL BE HEALED IN WITH MULCH OR SOIL, ADEQUATELY WATERED AND PROTECTED FROM EXTREME HEAT, SUN AND WIND.
 103 PLANTS SHALL NOT BE DUG FOR TRANSPLANTING BETWEEN APRIL 10 AND JUNE 30.
 104 UPON RECEIVING PLANT MATERIAL, SOIL SHALL BE AMENDED WITH FERTILIZER AND ROOT GROWTH HORMONE.
 105 TRANSPLANTS SHALL BE GUARANTEED FOR THE LENGTH OF THE GUARANTEE PERIOD SPECIFIED HEREIN.
 106 IF TRANSPLANTS DIE, SHRUBS AND TREES LESS THAN SIX INCHES (6") HIGH SHALL BE REPLACED IN KIND. TREES GREATER THAN SIX INCHES (6") HIGH MAY BE REQUIRED TO BE REPLACED IN ACCORDANCE WITH THE MUNICIPALITY'S TREE REPLACEMENT GUIDELINES.

11 WATERING
 111 NEW PLANTINGS ON LAWN AREAS SHALL BE ADEQUATELY IRRIGATED BEGINNING IMMEDIATELY AFTER PLANTING. WATER SHALL BE APPLIED TO EACH TREE AND SHRUB IN SUCH MANNER AS NOT TO DISTURB BACKFILL AND TO THE EXTENT THAT ALL WATER IN THE PLANTING BEDS ARE THOROUGHLY SATURATED. WATERING SHALL CONTINUE AT LEAST UNTIL PLANTS ARE ESTABLISHED.
 112 SITE OWNER SHALL PROVIDE WATER IF AVAILABLE ON SITE AT TIME OF PLANTING. IF WATER IS NOT AVAILABLE ON-SITE, CONTRACTOR SHALL SUPPLY ALL NECESSARY WATER. THE USE OF WATERING BAGS IS RECOMMENDED FOR ALL NEWLY PLANTED TREES.
 113 IF AN IRRIGATION SYSTEM HAS BEEN INSTALLED ON THE SITE, IT SHALL BE USED TO WATER PROPOSED PLANT MATERIAL, BUT ANY FAILURE OF THE SYSTEM DOES NOT ELIMINATE THE CONTRACTOR'S RESPONSIBILITY OF MAINTAINING THE DESIRED MOISTURE LEVEL FOR VARIOUS HEALTHY GROWTH.

12 GUARANTEE
 121 THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL PLANTS FOR A PERIOD OF 1 YEAR FROM APPROVAL OF LANDSCAPE INSTALLATION BY THE APPROVING AGENCY. CONTRACTOR SHALL SUPPLY THE OWNER WITH A MAINTENANCE BOND FOR TEN PERCENT (10%) OF THE VALUE OF THE LANDSCAPE INSTALLATION WHICH WILL BE RELEASED AT THE CONCLUSION OF THE GUARANTEE PERIOD AND WHEN A FINAL INSPECTION HAS BEEN COMPLETED AND APPROVED BY THE OWNER OR AUTHORIZED REPRESENTATIVE.
 122 ANY DEAD OR DYING PLANT MATERIAL SHALL BE REPLACED FOR THE LENGTH OF THE GUARANTEE PERIOD. REPLACEMENT OF PLANT MATERIAL SHALL BE CONDUCTED AT THE FIRST SUCCEEDING PLANTING SEASON. ANY DEBRIS SHALL BE EXPOSED OF OFF-SITE, WITHOUT EXCEPTION.
 123 TREES AND SHRUBS SHALL BE MAINTAINED BY THE CONTRACTOR DURING CONSTRUCTION AND THROUGHOUT THE 90 DAY MAINTENANCE PERIOD AS SPECIFIED HEREIN. CULTIVATION, WEEDING, WATERING AND PREVENTATIVE TREATMENTS SHALL BE PERFORMED AS NECESSARY TO KEEP PLANT MATERIAL IN GOOD CONDITION AND FREE OF INSECTS AND DISEASE.
 124 LAWNS SHALL BE MAINTAINED THROUGH WATERING, FERTILIZING, WEEDING, MOVING, TRIMMING AND OTHER OPERATIONS SUCH AS ROLLING, REGRADING AND REPLANTING AS REQUIRED TO ESTABLISH A SMOOTH, ACCEPTABLE LAWN FREE OF EROSION OR BARE AREAS.

13 CLEANUP
 131 UPON THE COMPLETION OF ALL LANDSCAPE INSTALLATION AND BEFORE THE FINAL ACCEPTANCE, THE CONTRACTOR SHALL REMOVE ALL UNUSED MATERIALS, EQUIPMENT AND DEBRIS FROM THE SITE. ALL PAVED AREAS ARE TO BE CLEAN.
 132 THE SITE SHALL BE CLEANED AND LEFT IN A NEAT AND ACCEPTABLE CONDITION AS APPROVED BY THE OWNER OR AUTHORIZED REPRESENTATIVE.

14 MAINTENANCE (ALTERNATIVE BID)
 141 A 90 DAY MAINTENANCE PERIOD SHALL COMMENCE AT THE END OF ALL LANDSCAPE INSTALLATION OPERATIONS. THE 90 DAY MAINTENANCE PERIOD ENSURES TO THE OWNER/PROFESSIONAL THAT THE NEWLY INSTALLED LANDSCAPE HAS BEEN MAINTAINED AS SPECIFIED ON THE APPROVED LANDSCAPE PLAN. ONCE THE 90 DAY MAINTENANCE PERIOD HAS EXPIRED, THE OWNER/OPERATOR MAY REQUEST THAT BIDDERS SUBMIT AN ALTERNATE MAINTENANCE BID FOR A MONTHLY MAINTENANCE CONTRACT. THE ALTERNATE MAINTENANCE CONTRACT WILL ENCOMPASS ANY WORK THAT IS CONSIDERED APPROPRIATE TO ENSURE THAT PLANT AND LAWN AREAS ARE HEALTHY AND MAINTAINED TO THE APPROVAL OF THE OWNER/OPERATOR.

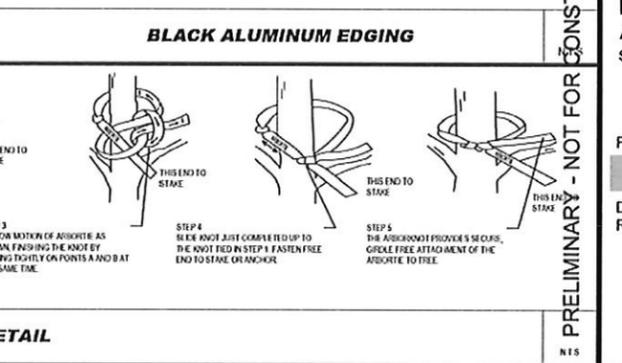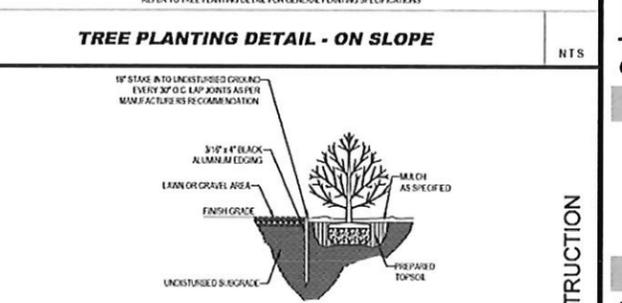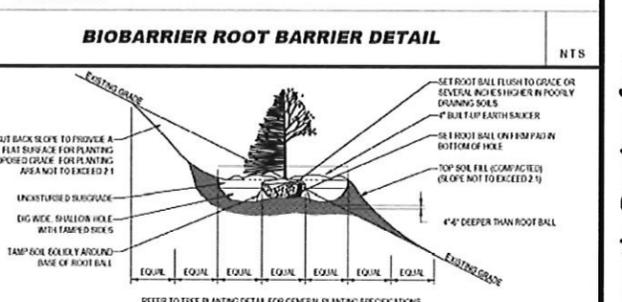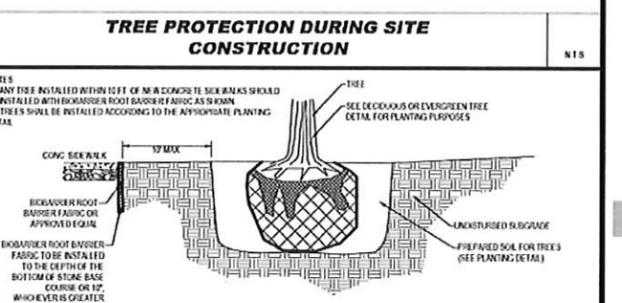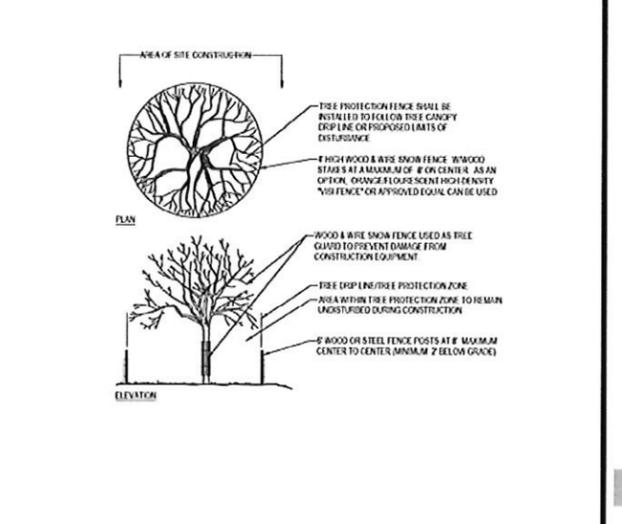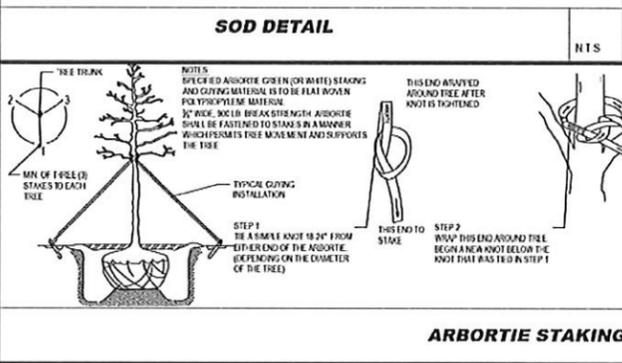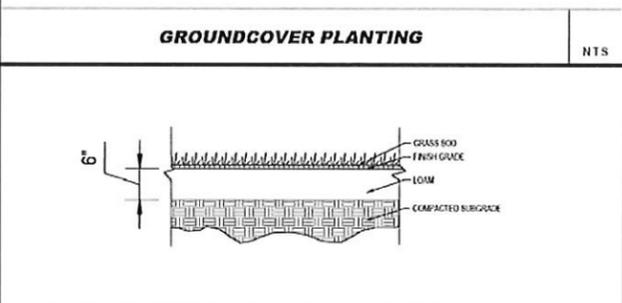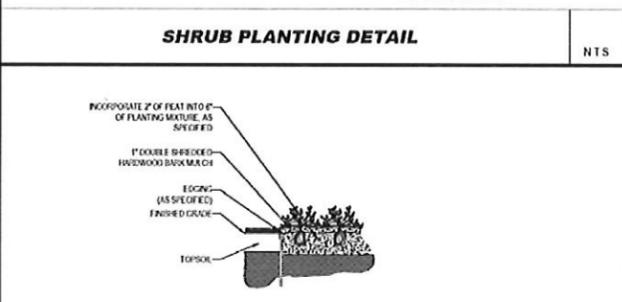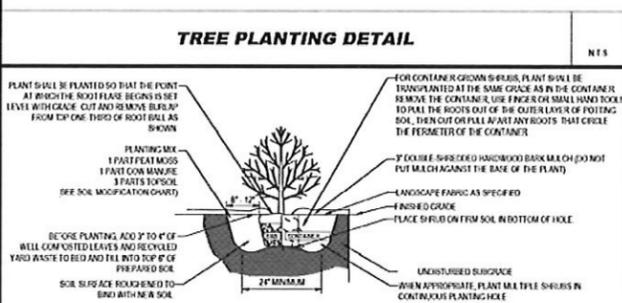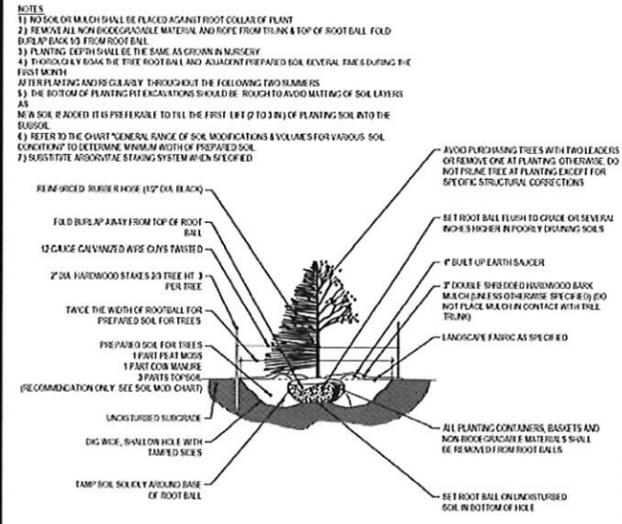

This drawing is copyrighted. Unauthorized use is prohibited.

Ed Wojcik architect, ltd
 One Richmond Square
 Providence, RI 02906
 401-861-7139

Schematic Design for:
9 Stimson Avenue
 Providence, RI 02906


LANDSCAPE NOTES AND DETAILS
 SCALE: 1" = 20"

PROJECT # 6218
 DATE: 6/8/2021
 REVISED DATE:

L-200


PRELIMINARY - NOT FOR CONSTRUCTION

This drawing is copyrighted. Unauthorized use is prohibited.

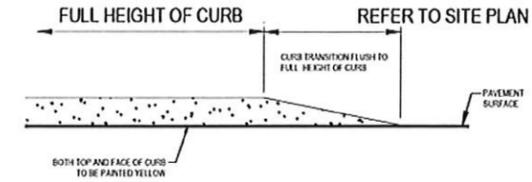


TRANSITION CURB DETAIL

NTS

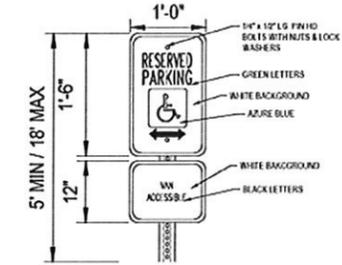


HANDICAP SIGN

NTS

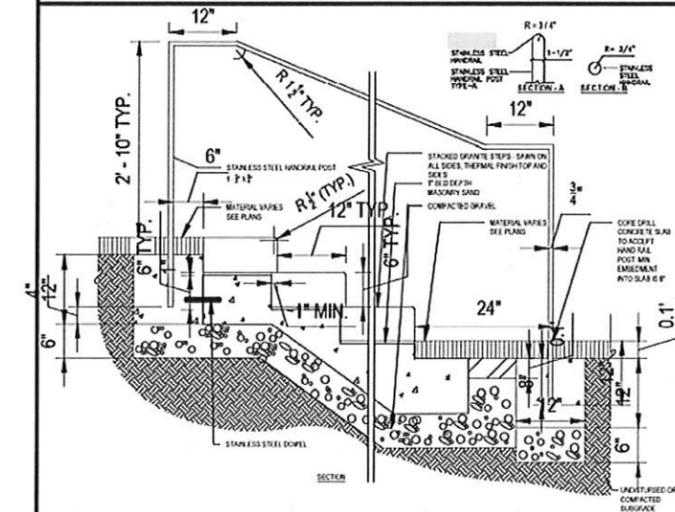

GRANITE TREAD STAIRS WITH STAINLESS STEEL HANDRAIL

NTS

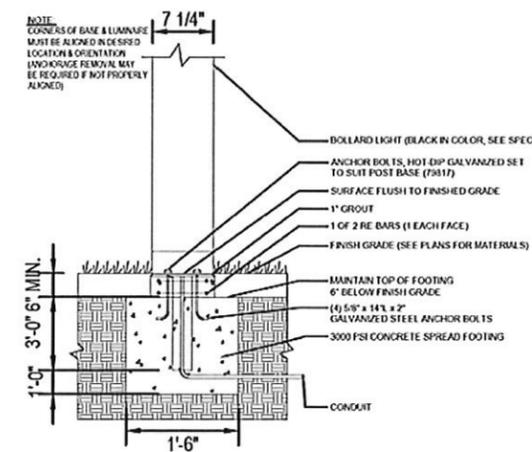

LIGHT BOLLARD

NTS

PRELIMINARY - NOT FOR CONSTRUCTION

Ed Wojcik
architect, ltd
 One Richmond Square
 Providence, RI 02906
 401-861-7139

Schematic Design for:
9 Stimson Avenue

9 Stimson Avenue
 Providence, RI 02906

LANDSCAPE
 DETAILS

DETAILS


SCALE: 1" = 20'

PROJECT # 6218

DATE: 6/8/2021
 REVISED DATE:

L-201

EXHIBIT 3A

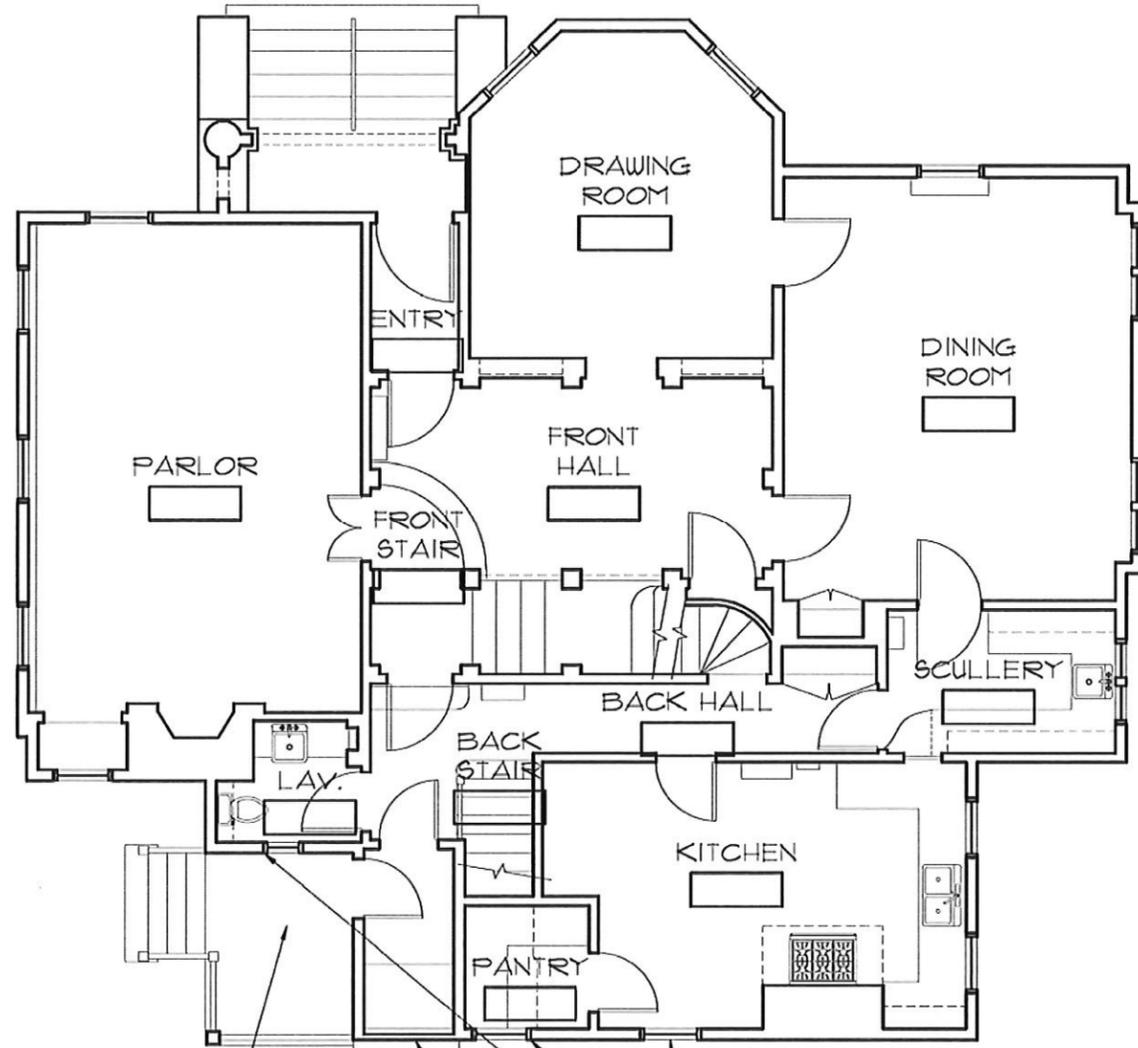


DEMOLISH COLUMNS, RAILING & BALUSTERS, PORCH FLOORING, BRICK PIERS & LATTICE

DEMOLISH BULKHEAD & IN-FILL PANELING ABOVE

DEMOLISH WINDOWS

EXISTING FIRST FLOOR PLAN

1 1/8" = 1'-0"

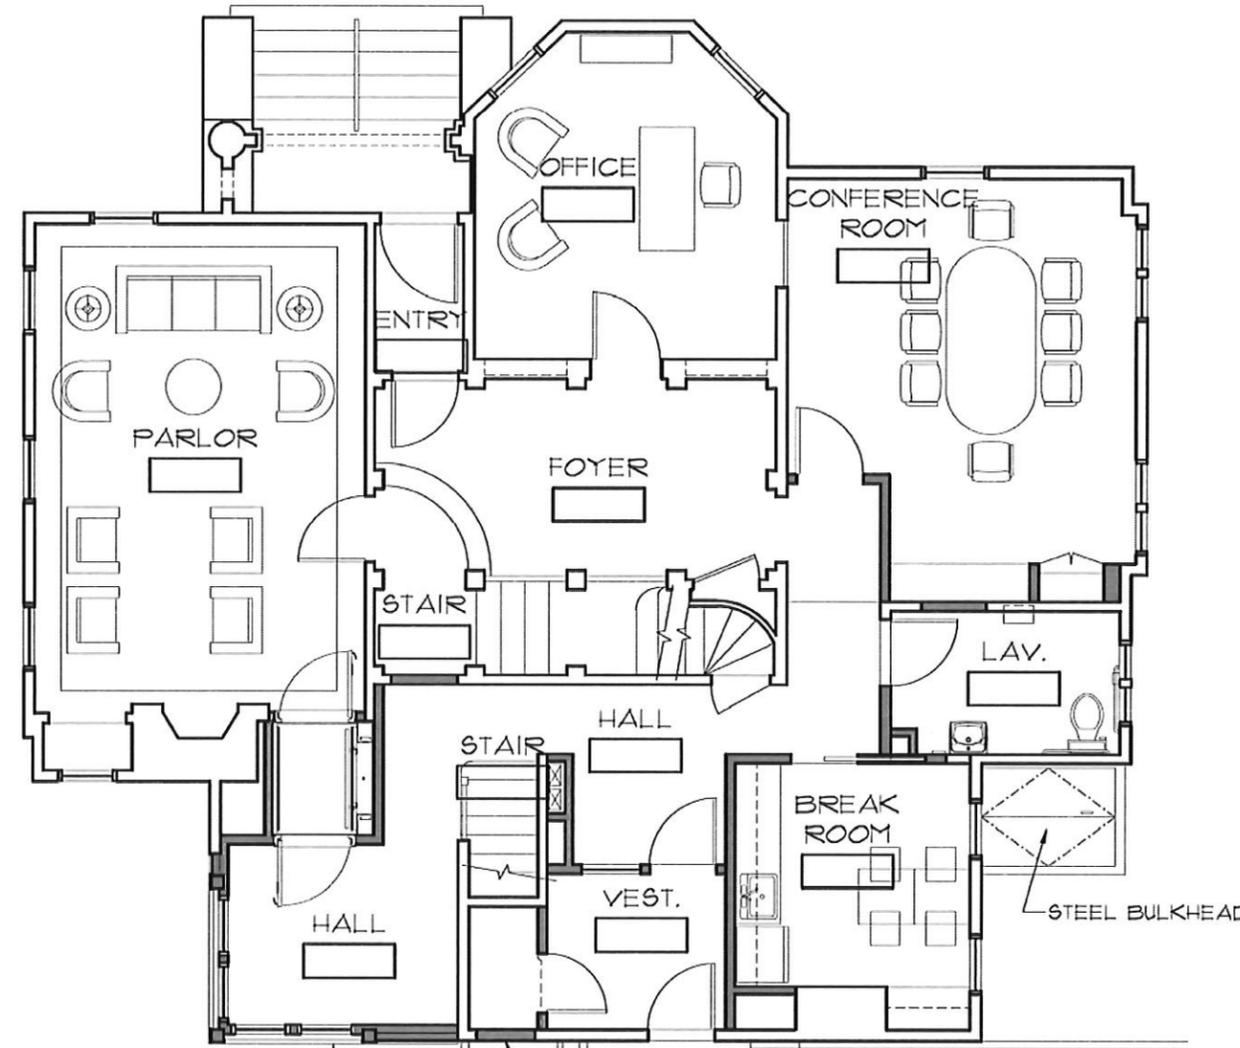

REBUILD PORCH, BRICK & LATTICE, COLUMNS & RAILING TO MATCH EXISTING WITH SQUARE BALUSTERS & WINDOWS ABOVE

IN-FILL WINDOW OPENING

PORCH ADDITION WITH EXTERIOR DOOR, STAIRS & SLOPED WALKWAY

PROPOSED FIRST FLOOR PLAN

2 1/8" = 1'-0"

This drawing is copyrighted. Unauthorized use is prohibited.

PRELIMINARY - NOT FOR CONSTRUCTION

Ed Wojcik
architect, ltd
 One Richmond Square
 Providence, RI 02906
 401-861-7139

Renovations to:
Wheeler School
 9 Stimson Avenue
 Providence, RI 02906


SHEET CONTENTS:
 Existing First Floor Plan
 Proposed First Floor Plan

PROJECT # 6218

DATE: 8/6/2021
 REVISED DATE:


A-1.0

This drawing is copyrighted. Unauthorized use is prohibited.

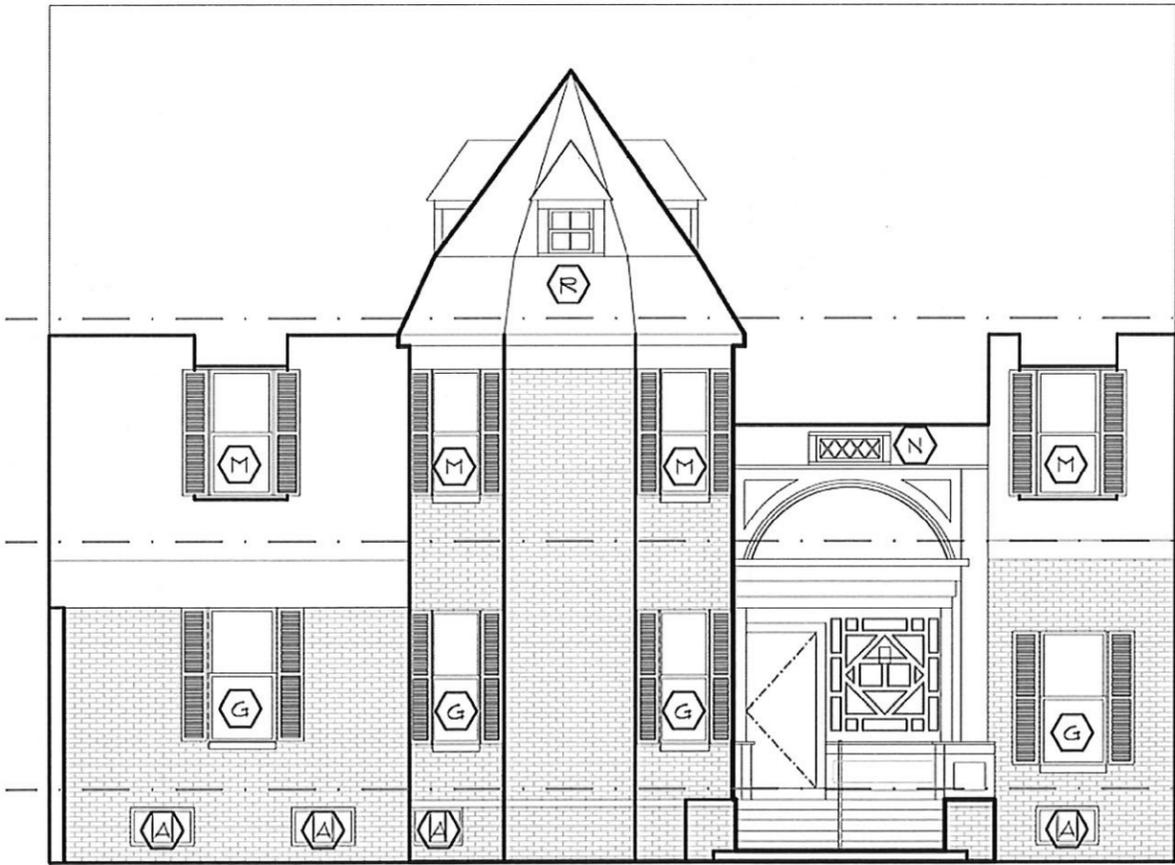

NORTH ELEVATION
EXISTING - WOOD WINDOWS

1 1/8" = 1'-0"

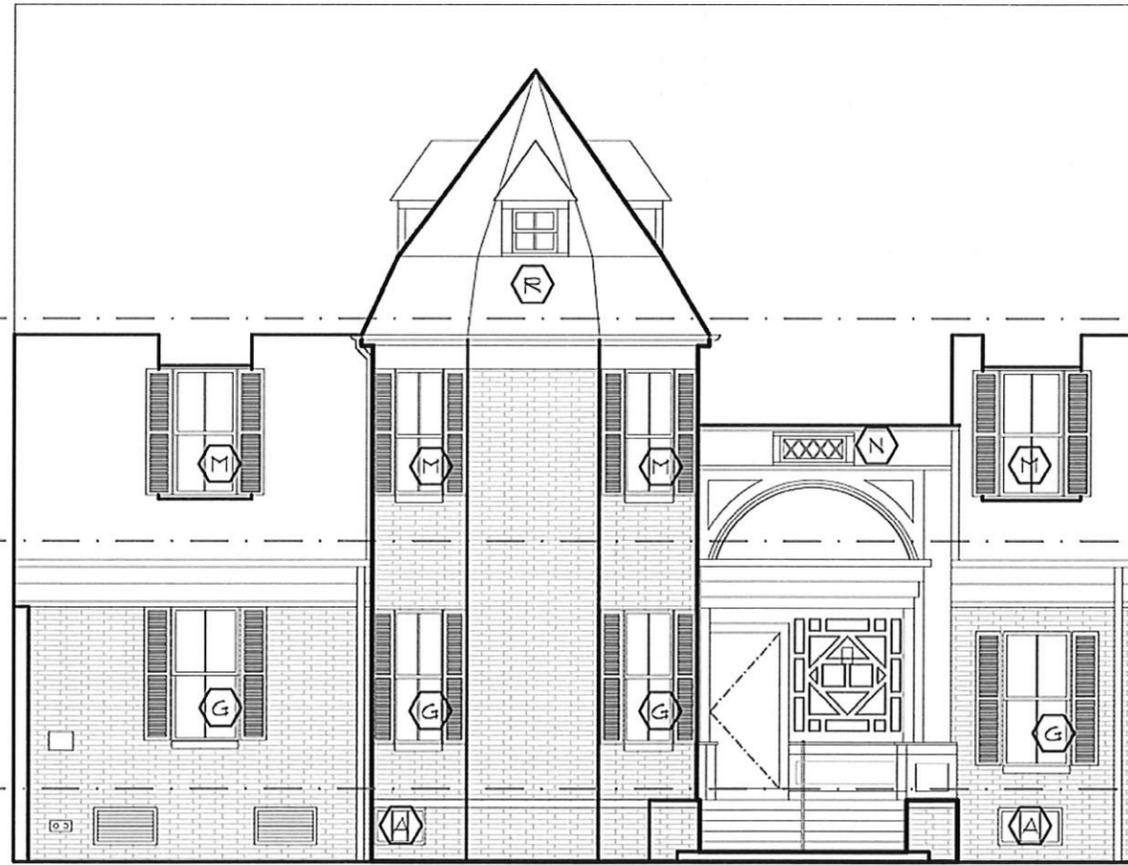

NORTH ELEVATION
PROPOSED - WOOD CLAD WINDOWS

2 1/8" = 1'-0"

EXHIBIT 3B

PRELIMINARY - NOT FOR CONSTRUCTION

Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139

Renovations to:
Wheeler School
9 Stimson Avenue
Providence, RI 02906

SHEET CONTENTS:
Existing and Proposed
North Elevations

PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:

A-2.0

This drawing is copyrighted. Unauthorized use is prohibited.



WEST ELEVATION
EXISTING - WOOD WINDOWS

1 1/8" = 1'-0"



WEST ELEVATION
PROPOSED - WOOD CLAD WINDOWS

2 1/8" = 1'-0"

DEMOLISH WINDOW
DEMOLISH COLUMNS, RAILING & BALUSTERS, PORCH FLOORING, BRICK PIERS & LATTICE

IN-FILL WINDOW
REBUILD PORCH, BRICK & LATTICE, COLUMNS & RAILING TO MATCH EXISTING WITH SQUARE BALUSTERS & WINDOWS ABOVE

EXHIBIT 3B

PRELIMINARY - NOT FOR CONSTRUCTION

SHEET CONTENTS:
Existing and Proposed
West Elevations

PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:

A-2.1

Renovations to:
Wheeler School
9 Stimson Avenue
Providence, RI 02906

Ed Wojcik
a r c h i t e c t, l t d
One Richmond Square
Providence, RI 02906
401-861-7139

This drawing is copyrighted. Unauthorized use is prohibited.



DEMOLISH COLUMNS, RAILING & BALUSTERS, PORCH FLOORING, BRICK PIERS & LATTICE
DEMOLISH BULKHEAD & IN-FILL PANELING ABOVE
DEMOLISH WINDOWS

SOUTH ELEVATION

EXISTING - WOOD WINDOWS

1 1/8" = 1'-0"



REBUILD PORCH, BRICK & LATTICE, COLUMNS & RAILING TO MATCH EXISTING WITH SQUARE BALUSTERS & WINDOWS ABOVE
IN-FILL WINDOW OPENING
PORCH ADDITION WITH EXTERIOR DOOR, STAIRS & SLOPED WALKWAY

SOUTH ELEVATION

PROPOSED - WOOD CLAD WINDOWS

2 1/8" = 1'-0"

EXHIBIT 3B

PRELIMINARY - NOT FOR CONSTRUCTION

SHEET CONTENTS:
Existing and Proposed
South Elevations

PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:

A-2.2

Renovations to:
Wheeler School
9 Stimson Avenue
9 Stimson Avenue
Providence, RI 02906


Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139

This drawing is copyrighted. Unauthorized use is prohibited.



EAST ELEVATION
EXISTING - WOOD WINDOWS

1 1/8" = 1'-0"

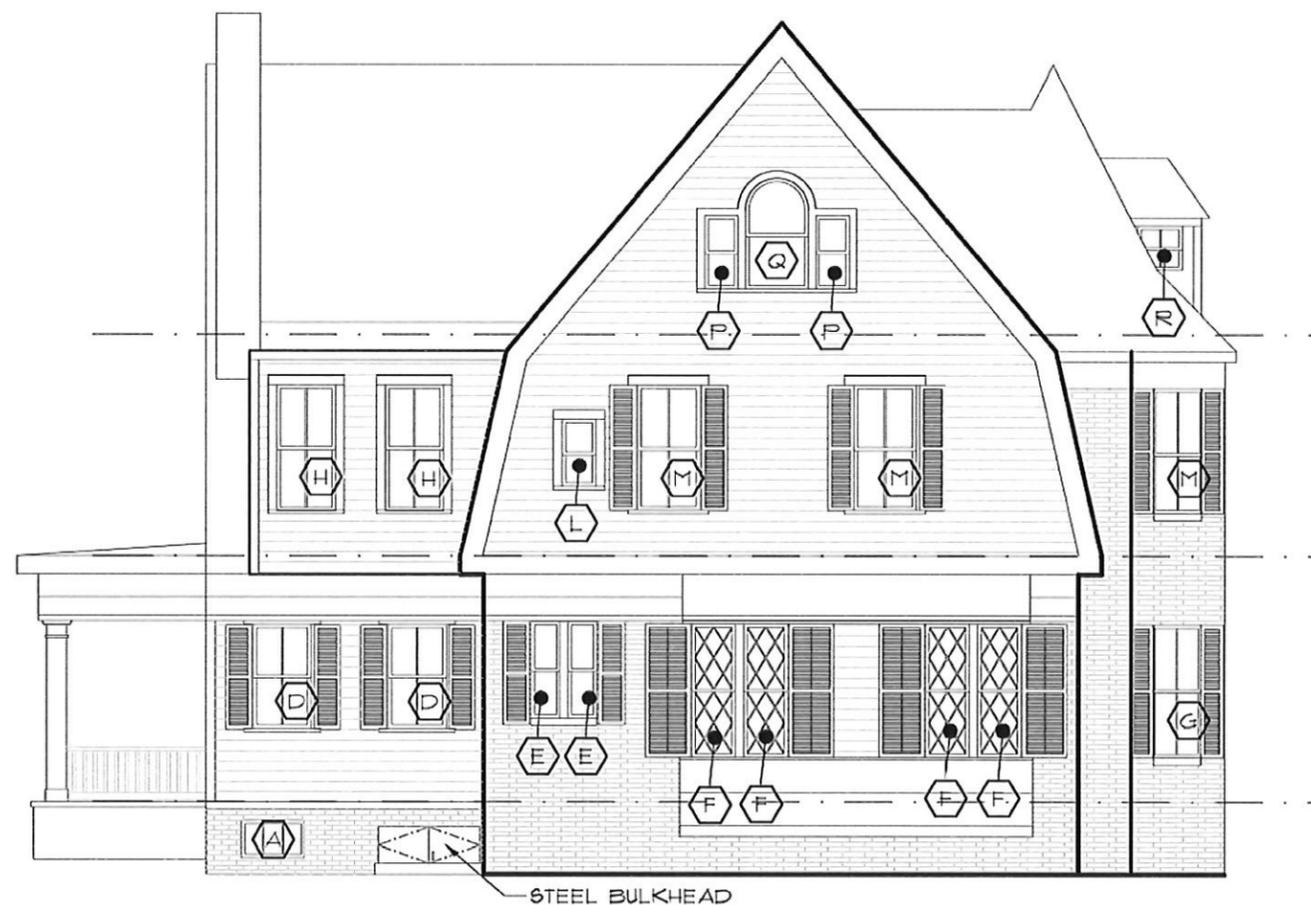

EAST ELEVATION
PROPOSED - WOOD CLAD WINDOWS

2 1/8" = 1'-0"

EXHIBIT 3B

PRELIMINARY - NOT FOR CONSTRUCTION

SHEET CONTENTS:
Existing and Proposed
East Elevations



PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:

A-2.3





Renovations to:
Wheeler School
9 Stimson Avenue
Providence, RI 02906

Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139

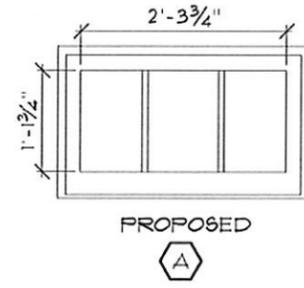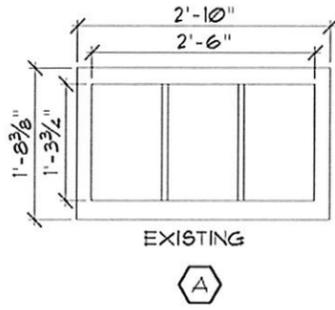

EXISTING AND PROPOSED WINDOWS
BASEMENT

1/2" = 1'-0"

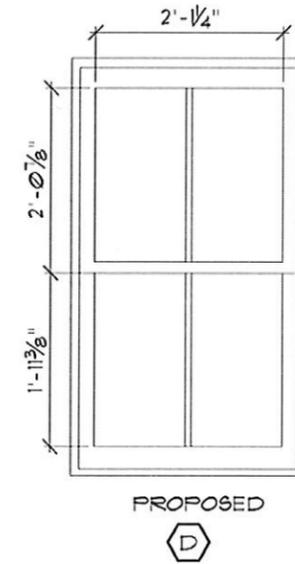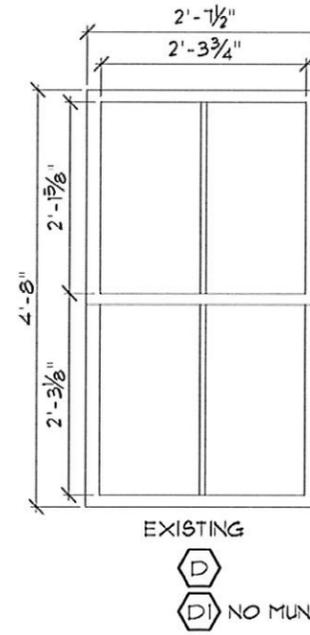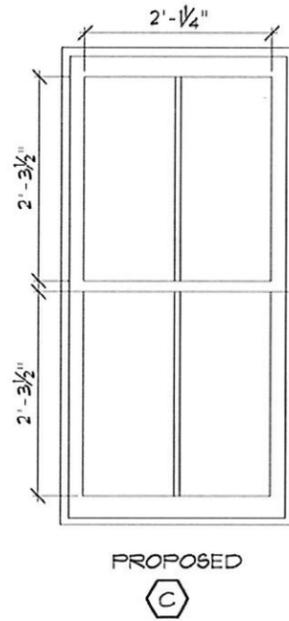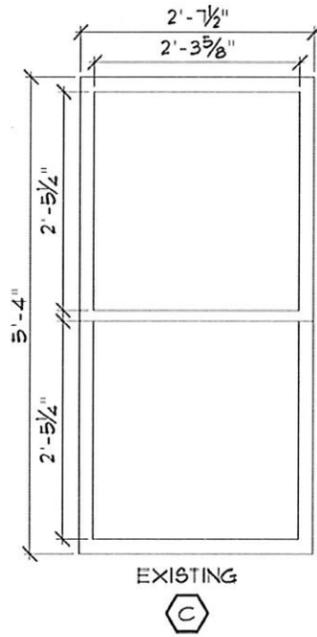

EXISTING AND PROPOSED WINDOWS
FIRST FLOOR

1/2" = 1'-0"

This drawing is copyrighted. Unauthorized use is prohibited.

PRELIMINARY - NOT FOR CONSTRUCTION

Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139


Renovations to:
Wheeler School
9 Stimson Avenue
Providence, RI 02906

SHEET CONTENTS:
Existing and Proposed
Window Types


PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:


A-3.0

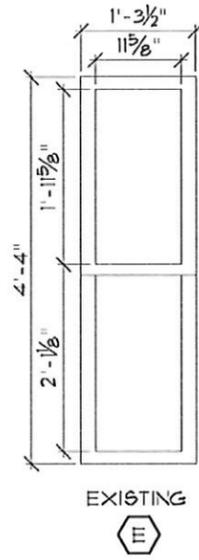


EXISTING
E

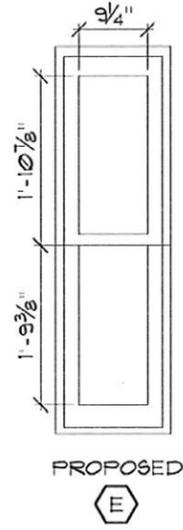


PROPOSED
E

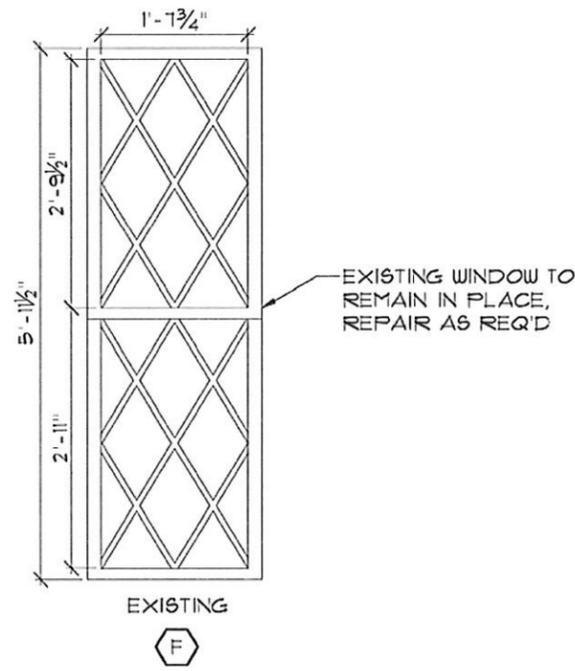

EXISTING
F

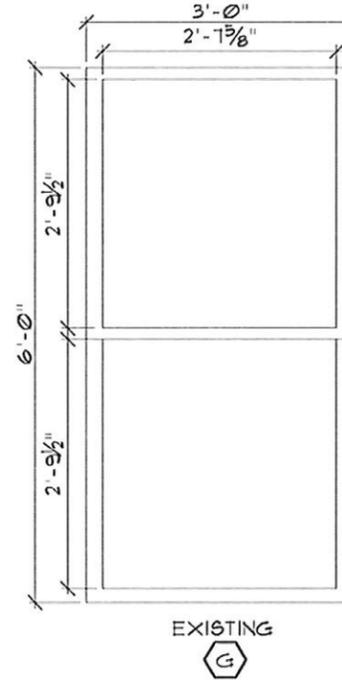

EXISTING
G

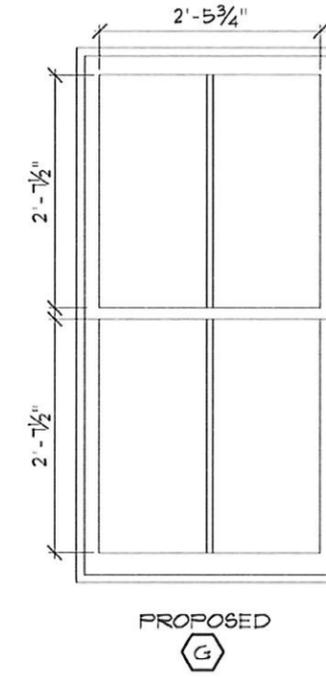


PROPOSED
G


EXISTING AND PROPOSED WINDOWS

FIRST FLOOR


1/2" = 1'-0"

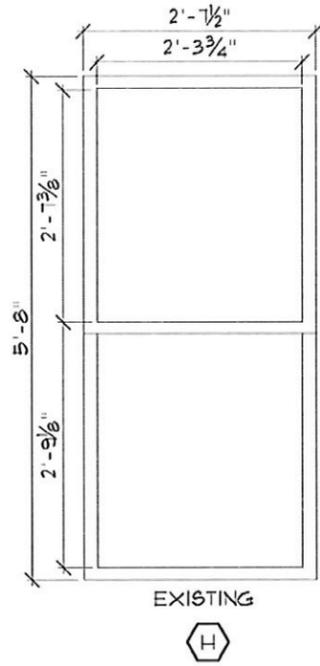


EXISTING
H

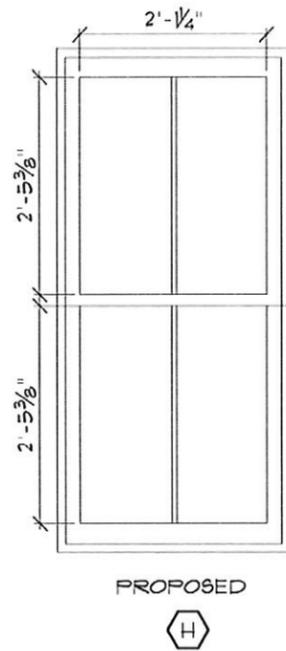


PROPOSED
H

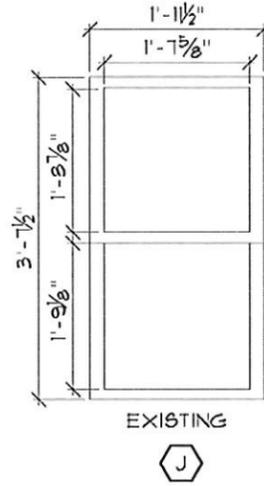

EXISTING
J

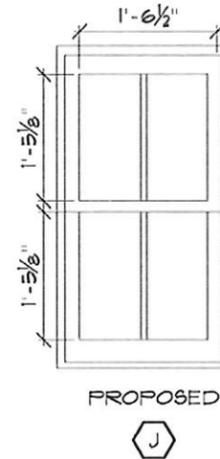

PROPOSED
J

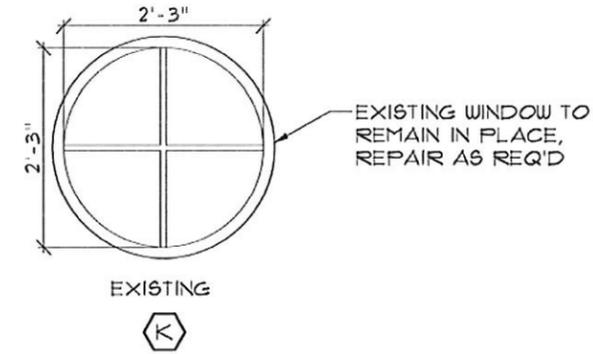








EXISTING
K

EXISTING AND PROPOSED WINDOWS

SECOND FLOOR

1/2" = 1'-0"






This drawing is copyrighted. Unauthorized use is prohibited.

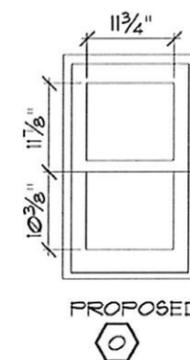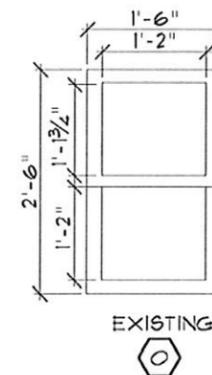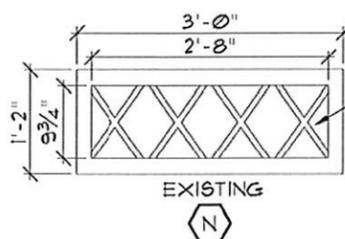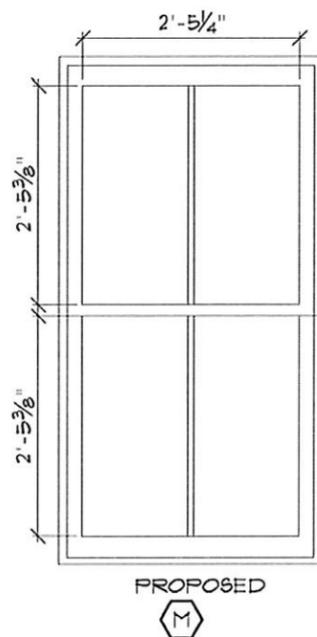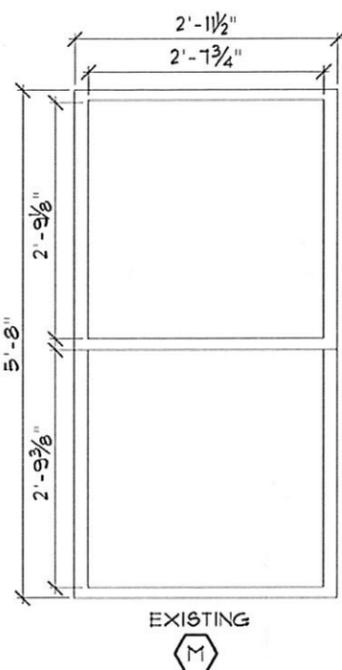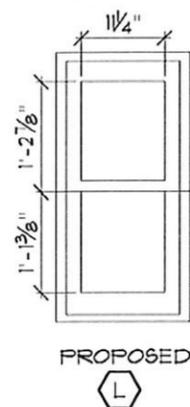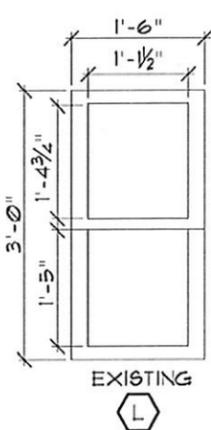

EXISTING AND PROPOSED WINDOWS

SECOND FLOOR

1/2" = 1'-0"

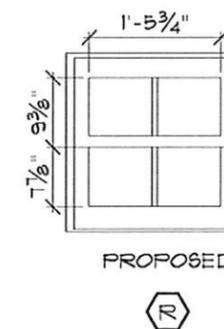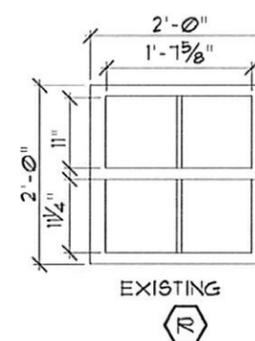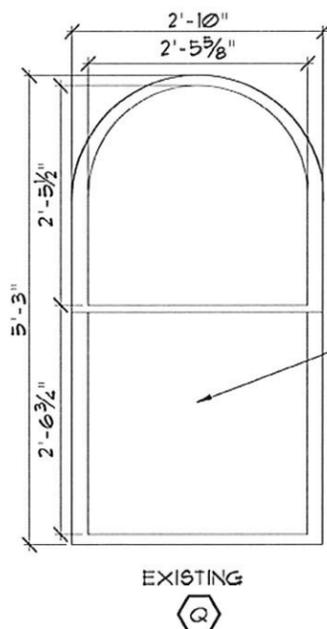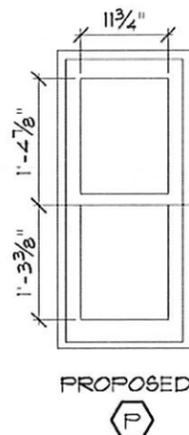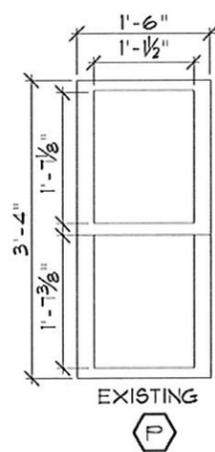


EXISTING AND PROPOSED WINDOWS

THIRD FLOOR


1/2" = 1'-0"

This drawing is copyrighted. Unauthorized use is prohibited.

EXISTING



PROPOSED




HEAD DETAILS


WINDOWS AT BRICK

1 1 1/2" = 1'-0"

EXISTING




PROPOSED



HEAD DETAILS

WINDOWS AT CLAPBOARD


3 1 1/2" = 1'-0"

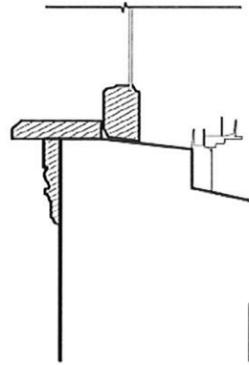

EXISTING


SILL DETAILS

WINDOWS AT BRICK

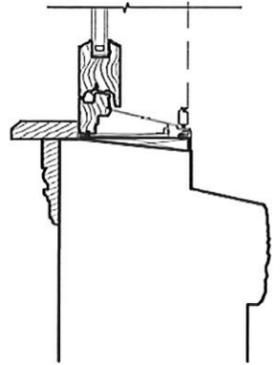

PROPOSED


2 1 1/2" = 1'-0"

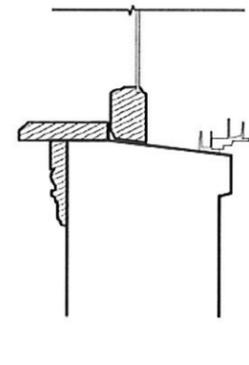

EXISTING


SILL DETAILS

WINDOWS AT CLAPBOARD

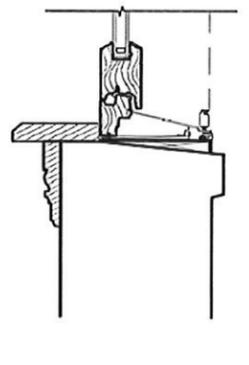

PROPOSED

4 1 1/2" = 1'-0"

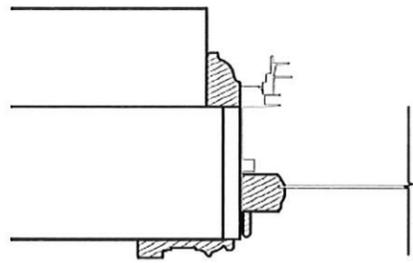


EXISTING

JAMB DETAIL

WINDOWS AT BRICK

5 1 1/2" = 1'-0"

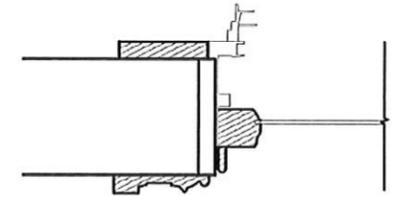


EXISTING

JAMB DETAIL

WINDOWS AT CLAPBOARD

7 1 1/2" = 1'-0"

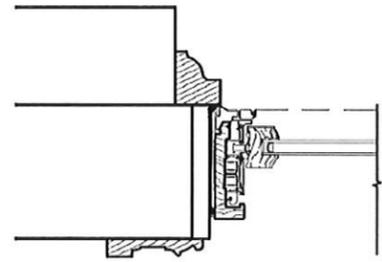


PROPOSED

JAMB DETAIL

WINDOWS AT BRICK

6 1 1/2" = 1'-0"

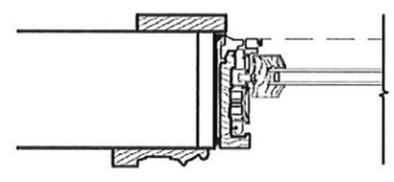

PROPOSED

JAMB DETAIL

WINDOWS AT CLAPBOARD

8 1 1/2" = 1'-0"

This drawing is copyrighted. Unauthorized use is prohibited.

Ed Wojcik
architect, ltd
One Richmond Square
Providence, RI 02906
401-861-7139

Renovations to:
Wheeler School
9 Stimson Avenue
Providence, RI 02906

PRELIMINARY - NOT FOR CONSTRUCTION

SHEET CONTENTS:
Existing and Proposed
Window Details

PROJECT # 6218

DATE: 8/6/2021
REVISED DATE:

A-4.0