

LOCUS MAP NOT TO SCALE



SITE IMPROVEMENTS AT CABRAL PARK

HONORABLE
BRETT P. SMILEY
MAYOR

WENDY NILSSON
SUPERINTENDENT OF PARKS

JOHN GONCALVES
CITY COUNCILOR



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



Providence Parks

COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:

Site Improvements at Cabral Park

**515 Wickenden Street
Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO

DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Cover Sheet

L-1

1 OF 23

SHEET SCHEDULE

- L-1 COVER SHEET
 - L-2 EXISTING SITE PLAN
 - L-3.1 DEMOLITION PLAN (NORTH)
 - L-3.2 DEMOLITION PLAN (SOUTH)
 - L-4.1 GRADING & UTILITIES PLAN (NORTH)
 - L-4.2 GRADING PLAN (SOUTH)
 - L-5.1 MATERIALS PLAN (NORTH)
 - L-5.2 MATERIALS PLAN (SOUTH)
 - L-6.1 LAYOUT PLAN (NORTH)
 - L-6.2 LAYOUT PLAN (SOUTH)
 - L-7.1 PLANTING PLAN (NORTH)
 - L-7.2 PLANTING PLAN (SOUTH)
 - L-8 SPLASH PAD ENLARGEMENTS
 - L-9.1 CONSTRUCTION DETAILS 1
 - L-9.2 CONSTRUCTION DETAILS 2
 - L-9.3 CONSTRUCTION DETAILS 3
 - L-9.4 CONSTRUCTION DETAILS 4
 - L-9.5 CONSTRUCTION DETAILS 5
 - L-9.6 CONSTRUCTION DETAILS 6
 - L-9.7 CONSTRUCTION DETAILS 7
 - L-9.8 CONSTRUCTION DETAILS 8 - SPLASHPAD
 - L-9.9 CONSTRUCTION DETAILS 9 - SPLASHPAD
 - L-10 VORTEX SPLASHPAD LAYOUT
- VORTEX P&E AND BONDING PLANS TO BE ISSUED VIA ADDENDUM**

DEMOLITION PLAN GENERAL NOTES

- ALL SITE PREPARATION NECESSARY TO COMPLETE THIS PROJECT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH PROVIDENCE PARKS DEPARTMENT STAFF TO DEVELOP A SUITABLE DEMOLITION PLAN, WHICH WILL MINIMIZE PARK DISTURBANCE AND ALLOW ALL FACILITIES TO REMAIN IN OPERATION DURING THE ENTIRETY OF CONSTRUCTION.
- UNLESS OTHERWISE NOTED, THE CONTRACTOR IS RESPONSIBLE FOR THE RELOCATION, DEMOLITION, REMOVAL AND DISPOSAL, IN A LOCATION APPROVED BY ALL GOVERNING AUTHORITIES, OF ALL EXISTING SITE ELEMENTS AND STRUCTURES INCLUDING BUT NOT LIMITED TO BITUMINOUS CONCRETE, CEMENT CONCRETE, GRAVEL, CURBS, WALKWAYS, SIDEWALKS, BERMS, FENCES, BOLLARDS, POSTS, PLANTING BEDS, TREES, SHRUBS, UTILITIES, DRAINAGE STRUCTURES AND ALL OTHER STRUCTURES SHOWN WITHIN THE LIMITS, AND WHERE NEEDED, TO ALLOW FOR NEW CONSTRUCTION. ALL ELEMENTS TO BE REMOVED SHALL BE UNDERCUT TO SUITABLE MATERIAL AND BROUGHT TO GRADE WITH SUITABLE COMPACTED FILL MATERIAL PER SPECIFICATIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL DEBRIS FROM THE SITE AND DISPOSING OF THE DEBRIS IN A PROPER AND LEGAL MANNER.
- THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS SHOWN ON THESE PLANS ARE BASED ON RECORDS OF VARIOUS UTILITY COMPANIES, AND WHEREVER POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION. THE CONTRACTOR MUST CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY IN THE CITY, AND "DIGSAFE" (1-800-344-7233) AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION WORK IN PREVIOUSLY UNALTERED AREAS TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RESOLVE CONFLICTS BETWEEN THE PROPOSED UTILITIES AND FIELD-LOCATED UTILITIES AND SHALL REPORT ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECT IMMEDIATELY. THE OWNER ASSUMES NO RESPONSIBILITY FOR DAMAGES INCURRED AS A RESULT OF UTILITIES OMITTED, INCOMPLETELY OR INACCURATELY SHOWN. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING ACCURATE RECORDS OF THE LOCATION AND ELEVATION OF ALL WORK INSTALLED AND EXISTING UTILITIES FOUND DURING CONSTRUCTION FOR THE PREPARATION OF THE AS-BUILT PLAN.
- THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ALL EXISTING UTILITIES IN WORKING ORDER AND FREE FROM DAMAGE DURING THE ENTIRE DURATION OF THE PROJECT. ALL COST RELATED TO THE REPAIR OF UTILITIES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. EXCAVATION REQUIRED WITHIN THE PROXIMITY OF EXISTING UTILITY LINES SHALL BE DONE BY HAND. CONTRACTOR SHALL REPAIR ANY DAMAGE TO EXISTING UTILITY LINE OR STRUCTURES INCURRED DURING CONSTRUCTION OPERATIONS AT NO COST TO THE OWNER.
- THE CONTRACTOR SHALL MAINTAIN CONTINUOUS ACCESS AND OPERATION FOR SURROUNDING FACILITIES, AS DEEMED BY THE OWNER, AT ALL TIMES DURING DEMOLITION OF THE EXISTING FACILITIES.
- PRIOR TO DEMOLITION OCCURRING, ALL EROSION CONTROL DEVICES AND TREE PROTECTIVE MEASURES ARE TO BE INSTALLED.

EROSION & SEDIMENT CONTROL NOTES

- THE SITE CONSTRUCTION FOREMAN SHALL BE DESIGNATED AS THE ON-SITE PERSONNEL RESPONSIBLE FOR THE DAILY INSPECTION AND MAINTENANCE OF ALL ESC MEASURES AND SHALL IMPLEMENT ALL NECESSARY MEASURES TO CONTROL EROSION AND PREVENT SEDIMENT FROM LEAVING THE SITE.
- THE CONTRACTOR SHALL INSTALL ALL ESC MEASURES AS SHOWN ON THE DESIGN PLANS AND AS DETERMINED NECESSARY IN THE FIELD BY OWNER'S REPRESENTATIVE BEFORE ANY CONSTRUCTION ACTIVITIES ARE TO BEGIN. THESE MEASURES SHALL BE CHECKED, MAINTAINED/REPLACED AS NECESSARY DURING THE ENTIRE CONSTRUCTION PERIOD OF THE PROJECT. SUCH MEASURES SHALL REPRESENT THE LIMIT OF WORK. WORKERS SHALL BE INFORMED THAT NO CONSTRUCTION ACTIVITY IS TO OCCUR BEYOND THE LIMIT OF WORK AT ANY TIME THROUGH THE CONSTRUCTION PERIOD.
- A MINIMUM SURPLUS OF 100 FEET OF EROSION CONTROL BARRIER (SILT FENCE&/OR SILT SOCK) SHALL BE STOCKPILED ONSITE AT ALL TIMES.
- THE CONTRACTOR SHALL PROTECT THE ADJACENT AREA FROM SEDIMENTATION DURING PROJECT CONSTRUCTION OPERATIONS.
- A CONSTRUCTION EXIT SHALL BE CONSTRUCTED TO SHED DIRT FROM CONSTRUCTION VEHICLE TIRES. THE CONSTRUCTION EXIT SHALL BE REPLACED/CLEANED AS NEEDED TO MAINTAIN ITS EFFECTIVENESS.
- THE LIMIT OF ALL CLEARING, GRADING AND DISTURBANCES SHALL BE KEPT TO A MINIMUM WITHIN THE PROPOSED AREA OF CONSTRUCTION. THE CONTRACTOR SHALL PHASE THE SITE WORK IN A MANNER TO MINIMIZE AREAS OF EXPOSED SOIL.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO MONITOR LOCAL WEATHER REPORTS DURING CONSTRUCTION AND PRIOR TO SCHEDULING EARTHMOVING OR OTHER CONSTRUCTION ACTIVITIES WHICH WILL LEAVE LARGE DISTURBED AREAS UNSTABILIZED. IF INCLEMENT WEATHER IS PREDICTED, THE CONTRACTOR SHALL USE THEIR BEST PROFESSIONAL JUDGEMENT AND SHALL BE RESPONSIBLE FOR ENSURING THAT NECESSARY EROSION CONTROL DEVICES ARE INSTALLED AND FUNCTIONING PROPERLY TO MINIMIZE EROSION FROM ANY IMPENDING WEATHER EVENTS.
- SOIL ESC MEASURES SHALL BE INSPECTED AND MAINTAINED ON A WEEKLY BASIS AND AFTER EACH RAINFALL EVENT OF 0.25 INCH OR GREATER DURING CONSTRUCTION TO ENSURE THAT THE ESC MEASURES ARE INTACT AND FUNCTIONING PROPERLY. IDENTIFIED DEFICIENCIES SHALL BE CORRECTED IMMEDIATELY NO LATER THAN 24 HOURS AFTER IDENTIFICATION.

- SOIL STOCKPILES LEFT OVERNIGHT SHALL BE SURROUNDED ON THEIR PERIMETERS WITH SILT SOCK.
- DISTURBED AREAS AND SLOPES SHALL NOT BE LEFT UNATTENDED OR EXPOSED FOR EXCESSIVE PERIODS OF TIME SUCH AS THE INACTIVE WINTER SEASON. THE CONTRACTOR SHOULD PROVIDE APPROPRIATE STABILIZATION PRACTICES ON ALL DISTURBED AREAS AS SOON AS POSSIBLE BUT NOT MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT AREA HAS TEMPORARILY OR PERMANENTLY CEASED. TEMPORARY AREAS HAVING A SLOPE GREATER THAN 3:1 SHALL BE REINFORCED WITH EROSION BLANKETS OR APPROVED EQUAL UNTIL THE SITE IS PROPERLY STABILIZED. TEMPORARY SWALES MAY ALSO BE REQUIRED IF DETERMINED NECESSARY IN THE FIELD BY OWNER'S REPRESENTATIVE.
- THE CONTRACTOR SHALL CONTAIN ALL SEDIMENT ONSITE. ALL EXITS FROM THE SITE WILL BE SWEEP AS NECESSARY INCLUDING ANY SEDIMENT TRACKING. PAVED AREAS SHALL BE SWEEP AS NEEDED TO REMOVE SEDIMENT AND POTENTIAL POLLUTANTS WHICH MAY ACCUMULATE DURING SITE WORK.
- ACCUMULATED SEDIMENT SHALL BE REMOVED FROM ALL ESC MEASURES AND DISPOSED OF IN A PRE-APPROVED LOCATION BY THE CONTRACTOR.
- DUST SHALL BE CONTROLLED BY WATERING OR OTHER APPROVED METHODS AS NECESSARY.

GENERAL CONSTRUCTION NOTES

- INFORMATION FOR THE EXISTING CONDITIONS PLAN WAS OBTAINED FROM GIS, AERIAL IMAGERY AND FIELD OBSERVATION. ALL EXISTING CONDITIONS ARE TO BE CONSIDERED APPROXIMATE. THIS IS NOT A REGISTERED SURVEY.
- ANY ERRORS OR DISCREPANCIES ON THE DRAWINGS, SHOP DRAWINGS, AND DETAILS ARE TO BE BROUGHT TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE BEFORE THE WORK HAS COMMENCED.
- THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFICATION OF ALL LOCATIONS AND DIMENSIONS. DISCREPANCIES BETWEEN LAYOUT DIMENSIONS ON PLANS AND ACTUAL MEASUREMENTS IN FIELD ARE TO BE REPORTED TO THE OWNER'S REPRESENTATIVE BEFORE CONSTRUCTION BEGINS.
- THE CONTRACTOR SHALL NOTIFY THE OWNER'S REPRESENTATIVE PRIOR TO DEMOLITION OR INSTALLATION OF ANY PORTION OF THE SITE WORK.
- THE CONTRACTOR SHALL STAKE OUT ALL LAYOUTS OF PROPOSED WORK FOR APPROVAL BY THE OWNER'S REPRESENTATIVE PRIOR TO COMMENCING WORK.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR ESTABLISHING AND MAINTAINING ALL CONTROL POINTS AND BENCHMARKS DURING CONSTRUCTION INCLUDING BENCHMARK LOCATIONS AND ELEVATIONS AT CRITICAL AREAS. THE LOCATION OF ALL CONTROL POINTS AND BENCHMARKS SHALL BE COORDINATED WITH THE OWNER'S REPRESENTATIVE.
- UNLESS OTHERWISE SPECIFIED ON THE PLANS AND DETAILS/SPECIFICATIONS, ALL SITE CONSTRUCTION MATERIALS AND METHODOLOGIES ARE TO CONFORM TO THE MOST RECENT VERSION OF THE RHODE ISLAND DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS (THE RHODE ISLAND DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION 2015 EDITION).
- CONSTRUCTION SHALL BE PERFORMED IN ACCORDANCE WITH APPLICABLE LAWS AND REGULATIONS REGARDING NOISE, VIBRATION, DUST, SEDIMENTATION CONTAINMENT, AND TRENCH WORK.
- THE CONTRACTOR SHALL RESTORE ALL SURFACES EQUAL TO THEIR ORIGINAL CONDITION AFTER CONSTRUCTION IS COMPLETE. AREAS NOT DISTURBED BY CONSTRUCTION SHALL BE LEFT NATURAL. THE CONTRACTOR SHALL TAKE CARE TO PREVENT DAMAGE TO SHRUBS, TREES, AND OTHER LANDSCAPING OR NATURAL FEATURES, WHEREAS THE PLANS DO NOT SHOW ALL LANDSCAPING FEATURES. EXISTING CONDITIONS MUST BE VERIFIED BY THE CONTRACTOR IN ADVANCE OF THE WORK.
- ALL UNPAVED AREAS DISTURBED BY THE WORK SHALL HAVE A MINIMUM OF 4-INCHES OF LOAM INSTALLED AND SEEDED WITH GRASS SEED AS SHOWN ON THE PLAN AND/OR DIRECTED BY THE LANDSCAPE ARCHITECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR WATERING ANY LOAM AND SEEDED AREAS UNTIL LAWN GROWTH IS ESTABLISHED AND APPROVED BY THE LANDSCAPE ARCHITECT AND/OR OWNER'S REPRESENTATIVE.
- THE CONTRACTOR SHALL REGULARLY INSPECT THE PERIMETER OF THE PROPERTY TO CLEAN UP AND REMOVE ANY LOOSE CONSTRUCTION DEBRIS BEFORE IT LEAVES THE SITE. ALL DEMOLITION DEBRIS SHALL BE PROMPTLY REMOVED FROM THE SITE TO AN APPROVED DUMP SITE. ALL TRUCKS LEAVING THE SITE SHALL BE COVERED.
- CONCRETE TRUCKS SHALL NOT BE WASHED ONSITE. ANY CEMENT OR CONCRETE DEBRIS LEFT IN THE DISTURBED AREA SHALL BE REMOVED BY HAND AT THE CONTRACTOR'S EXPENSE.
- IF ANY DEVIATION OR ALTERATION OF THE WORK PROPOSED ON THESE DRAWINGS IS REQUIRED, THE CONTRACTOR IS TO IMMEDIATELY CONTACT AND COORDINATE WITH THE LANDSCAPE ARCHITECT AND THE OWNER'S REPRESENTATIVE.
- AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL REMOVE ALL CONSTRUCTION DEBRIS AND SURPLUS MATERIAL FROM THE SITE. A THOROUGH INSPECTION OF THE WORK PERIMETER IS TO BE MADE AND ALL DISCARDED MATERIALS, BLOWN OR WATER CARRIED DEBRIS, SHALL BE COLLECTED AND REMOVED FROM THE SITE.
- THE CONTRACTOR IS RESPONSIBLE FOR SECURING THE SITE FOR THE SAFETY OF THE GENERAL PUBLIC AND TO PROTECT PROPERTY AGAINST VANDALISM AND THEFT.
- THE CONTRACTOR MUST OBTAIN ALL REQUIRED CITY, STATE AND FEDERAL PERMITS.
- THE PROVIDENCE PARKS DEPARTMENT ASSUMES NO RESPONSIBILITY IF THE WORK IS NOT INSTALLED AS PER THE PLANS OR IF FIELD CHANGES ARE MADE WITHOUT THE KNOWLEDGE AND APPROVAL OF THE OWNER'S REPRESENTATIVE.

LAYOUT NOTES

- ALL LINES AND DIMENSIONS ARE PARALLEL OR PERPENDICULAR TO THE LINES FROM WHICH THEY ARE MEASURED UNLESS OTHERWISE INDICATED.
- STORAGE AREAS FOR CONTRACTOR'S EQUIPMENT AND MATERIALS SHALL BE ON AND WITHIN LIMITS OF WORK AS SHOWN ON THE PLANS AND AS APPROVED BY THE OWNER'S REPRESENTATIVE.
- CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS IN THE FIELD AND REPORT ANY DISCREPANCIES IN THE PLAN TO THE OWNER'S REPRESENTATIVE PRIOR TO STARTING WORK.
- ALL LAYOUTS FOR WALKS AND PATHS SHALL BE ADEQUATELY STAKED BY THE CONTRACTOR AND APPROVED BY THE OWNER'S REPRESENTATIVE PRIOR TO CONSTRUCTION.
- ALL PLACEMENT OF SITE FURNISHINGS, BOULDERS, PLAY STRUCTURES AND OUTDOOR FITNESS EQUIPMENT TO BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.

PLANTING NOTES

- ALL NEW PLANT MATERIALS SHALL CONFORM TO THE MINIMUM GUIDELINES ESTABLISHED FOR NURSERY STOCK PUBLISHED BY THE AMERICAN ASSOCIATION OF NURSERYMEN, INC. IN ADDITION, ALL NEW PLANT MATERIAL FOR THE PROJECT SHALL BE OF SPECIMEN QUALITY.
- ALL NEW PLANTS TO BE BALLED AND BURLAPPED OR CONTAINER GROWN, UNLESS OTHERWISE NOTED ON THE PLANT LIST.
- THE CONTRACTOR SHALL SUPPLY ALL NEW PLANT MATERIAL IN QUANTITIES SUFFICIENT TO COMPLETE THE PLANTING SHOWN ON THE DRAWINGS.
- ANY PROPOSED SUBSTITUTIONS OF PLANT SPECIES SHALL BE MADE WITH PLANTS OF EQUIVALENT OVERALL FORM, HEIGHT, BRANCHING HABIT, FLOWER, LEAF, COLOR, FRUIT AND CULTURE, AND ONLY AFTER WRITTEN APPROVAL OF THE LANDSCAPE ARCHITECT.
- ALL NEW PLANTS SHALL BE TAGGED AND APPROVED BY THE LANDSCAPE ARCHITECT AT THE NURSERY PRIOR TO DIGGING OR DELIVERY TO THE SITE.
- CONTRACTOR SHALL LOCATE AND VERIFY ALL EXISTING UTILITY LINES PRIOR TO PLANTING AND SHALL REPORT ANY CONFLICTS TO THE LANDSCAPE ARCHITECT.
- STAKE LOCATIONS OF ALL PROPOSED PLANTING FOR APPROVAL BY THE LANDSCAPE ARCHITECT PRIOR TO THE COMMENCEMENT OF PLANTING. INDIVIDUAL STAKES SHALL BE PLACED FOR TREES AND SHRUBS. EDGE OF PLANTING BEDS SHALL BE PAINTED. NOTIFY LANDSCAPE ARCHITECT 24 HOURS PRIOR TO DESIRED APPROVAL.
- ALL NEW PLANTS SHALL BE SUPPLIED AND INSTALLED DURING THE PERIODS OF APRIL 1 - JUNE 15 AND/OR SEPTEMBER 1 - NOVEMBER 15 PER SPECIFICATIONS.
- PREPARE ALL INDIVIDUAL TREE PITS AND SHRUB PLANTING BEDS TO A MINIMUM DEPTH OF EIGHTEEN INCHES (18") WITH SPECIFIED PLANTING MIX: 50% SCREENED TOPSOIL, 40% EXISTING SOIL AND 10% COMPOST. BLEND COMPOST INTO TOP 4" OF SOIL. PLANTING MIX SHALL BE FREE OF LUMPS, STONES, PLANTS, ROOTS, AND OTHER FOREIGN MATTER.
- ALL SHRUB BEDS AND INDIVIDUAL TREE PITS SHALL RECEIVE THREE (3) INCHES OF BARK MULCH PER SPECIFICATIONS. PERENNIAL AND GROUNDCOVER BEDS SHALL RECEIVE TWO INCHES (2"). PROVIDE LANDSCAPE ARCHITECT WITH SAMPLE FOR APPROVAL.
- ALL BURLAP, TWINE AND WIRE SHALL BE COMPLETELY REMOVED OR CUT AWAY AT TIME OF INSTALLATION.
- PRUNE TREES IN ACCORDANCE WITH THE SPECIFICATIONS.
- PLANT WARRANTY SHALL BE FOR ONE FULL GROWING SEASON FROM THE TIME OF SUBSTANTIAL COMPLETION.
- LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACING ALL DAMAGED, STOLEN, DEAD, DECLINING OR LOST MATERIAL UNTIL COMPLETION OF MAINTENANCE PERIODS OR GUARANTEE PERIODS.
- IF NO IRRIGATION SYSTEM IS PLANNED, AN APPROPRIATE WATERING SCHEDULE SHALL BE ESTABLISHED BY THE LANDSCAPE CONTRACTOR FOR ALL PLANT MATERIAL BASED UPON PLANT SPECIES REQUIREMENTS AND PROVIDED IN WRITING TO THE LANDSCAPE ARCHITECT AND OWNER FOR REVIEW AND APPROVAL. THE APPROVED SCHEDULE SHOULD BE FOLLOWED UNTIL COMPLETION OF PLANT MAINTENANCE PERIODS OR WARRANTY PERIODS.
- ALL VEGETATION AND DEBRIS SHALL BE REMOVED FROM PROPOSED PLANTING AREAS PRIOR TO PLANTING AND BACKFILLING. CONTRACTOR SHALL REMOVE ALL WEEDS AND DEBRIS FROM SITE AS WORK PROGRESSES AND UNTIL COMPLETION OF PLANT MAINTENANCE PERIODS OR WARRANTY PERIODS.
- ALL AREAS TO BE SEEDED OR SODDED SHALL RECEIVE SIX INCHES (6") OF LOAM, MEASURED AFTER INSTALLATION, PRIOR TO SEEDING.
- ALL EXISTING LAWN AREAS DESIGNED TO REMAIN SHALL BE AERATED, FERTILIZED AND OVERSEEDED, AS DIRECTED BY THE LANDSCAPE ARCHITECT.
- IN ADDITION TO LOCATIONS DEFINED FOR SEED ON THE PLANTING PLAN, THE CONTRACTOR SHALL BE RESPONSIBLE FOR SEEDING ANY DISTURBED AREAS.
- A DETAILED PLANT MAINTENANCE MANUAL SHALL BE ESTABLISHED BY THE LANDSCAPE CONTRACTOR FOR ALL PLANT MATERIAL BASED UPON PLANT SPECIES REQUIREMENTS AND PROVIDED IN WRITING TO THE LANDSCAPE ARCHITECT AND OWNER FOR REVIEW AND APPROVAL. INFORMATION THEREIN SHALL INCLUDE REQUIRED PRUNING SCHEDULE, FERTILIZING AND PROPOSED INTEGRATED PEST MANAGEMENT (IPM) AS NECESSARY. THE APPROVED MAINTENANCE SHOULD BE FOLLOWED UNTIL COMPLETION OF PLANT MAINTENANCE PERIODS OR WARRANTY PERIODS.
- LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING CLOSE COORDINATION WITH OWNER, GENERAL CONTRACTOR, RELATED SUBCONTRACTORS, LANDSCAPE ARCHITECT, AND ALL SITE WORK RELATED ITEMS.



**PROVIDENCE
PARKS DEPARTMENT**
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



**Providence
Parks**

COPYRIGHT (C) CITY OF
PROVIDENCE PARKS
DEPARTMENT, ALL RIGHTS
RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
REPRODUCED, STORED IN A RETRIEVAL
SYSTEM OR TRANSMITTED IN ANY FORM OR
BY ANY MEANS, ELECTRONIC,
MECHANICAL, PHOTOCOPIING,
RECORDING OR OTHERWISE WITHOUT THE
PRIOR WRITTEN PERMISSION OF THE CITY OF
PROVIDENCE PARKS DEPARTMENT. ANY
MODIFICATIONS TO THIS DOCUMENT
WITHOUT THE WRITTEN PERMISSION OF
THE CITY OF PROVIDENCE PARKS
DEPARTMENT SHALL RENDER IT INVALID
AND UNUSABLE.

STAMP

PROJECT:


**Site Improvements at
Cabral Park**

**515 Wickenden Street
Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE

0 10' 20' 40'



SCALE: 1"=20'

DRAWING INFO

DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG


SHEET TITLE

**Existing Site
Plan**

L-2

2 OF 23

FILE: CABR23.01-PLANS.dwg

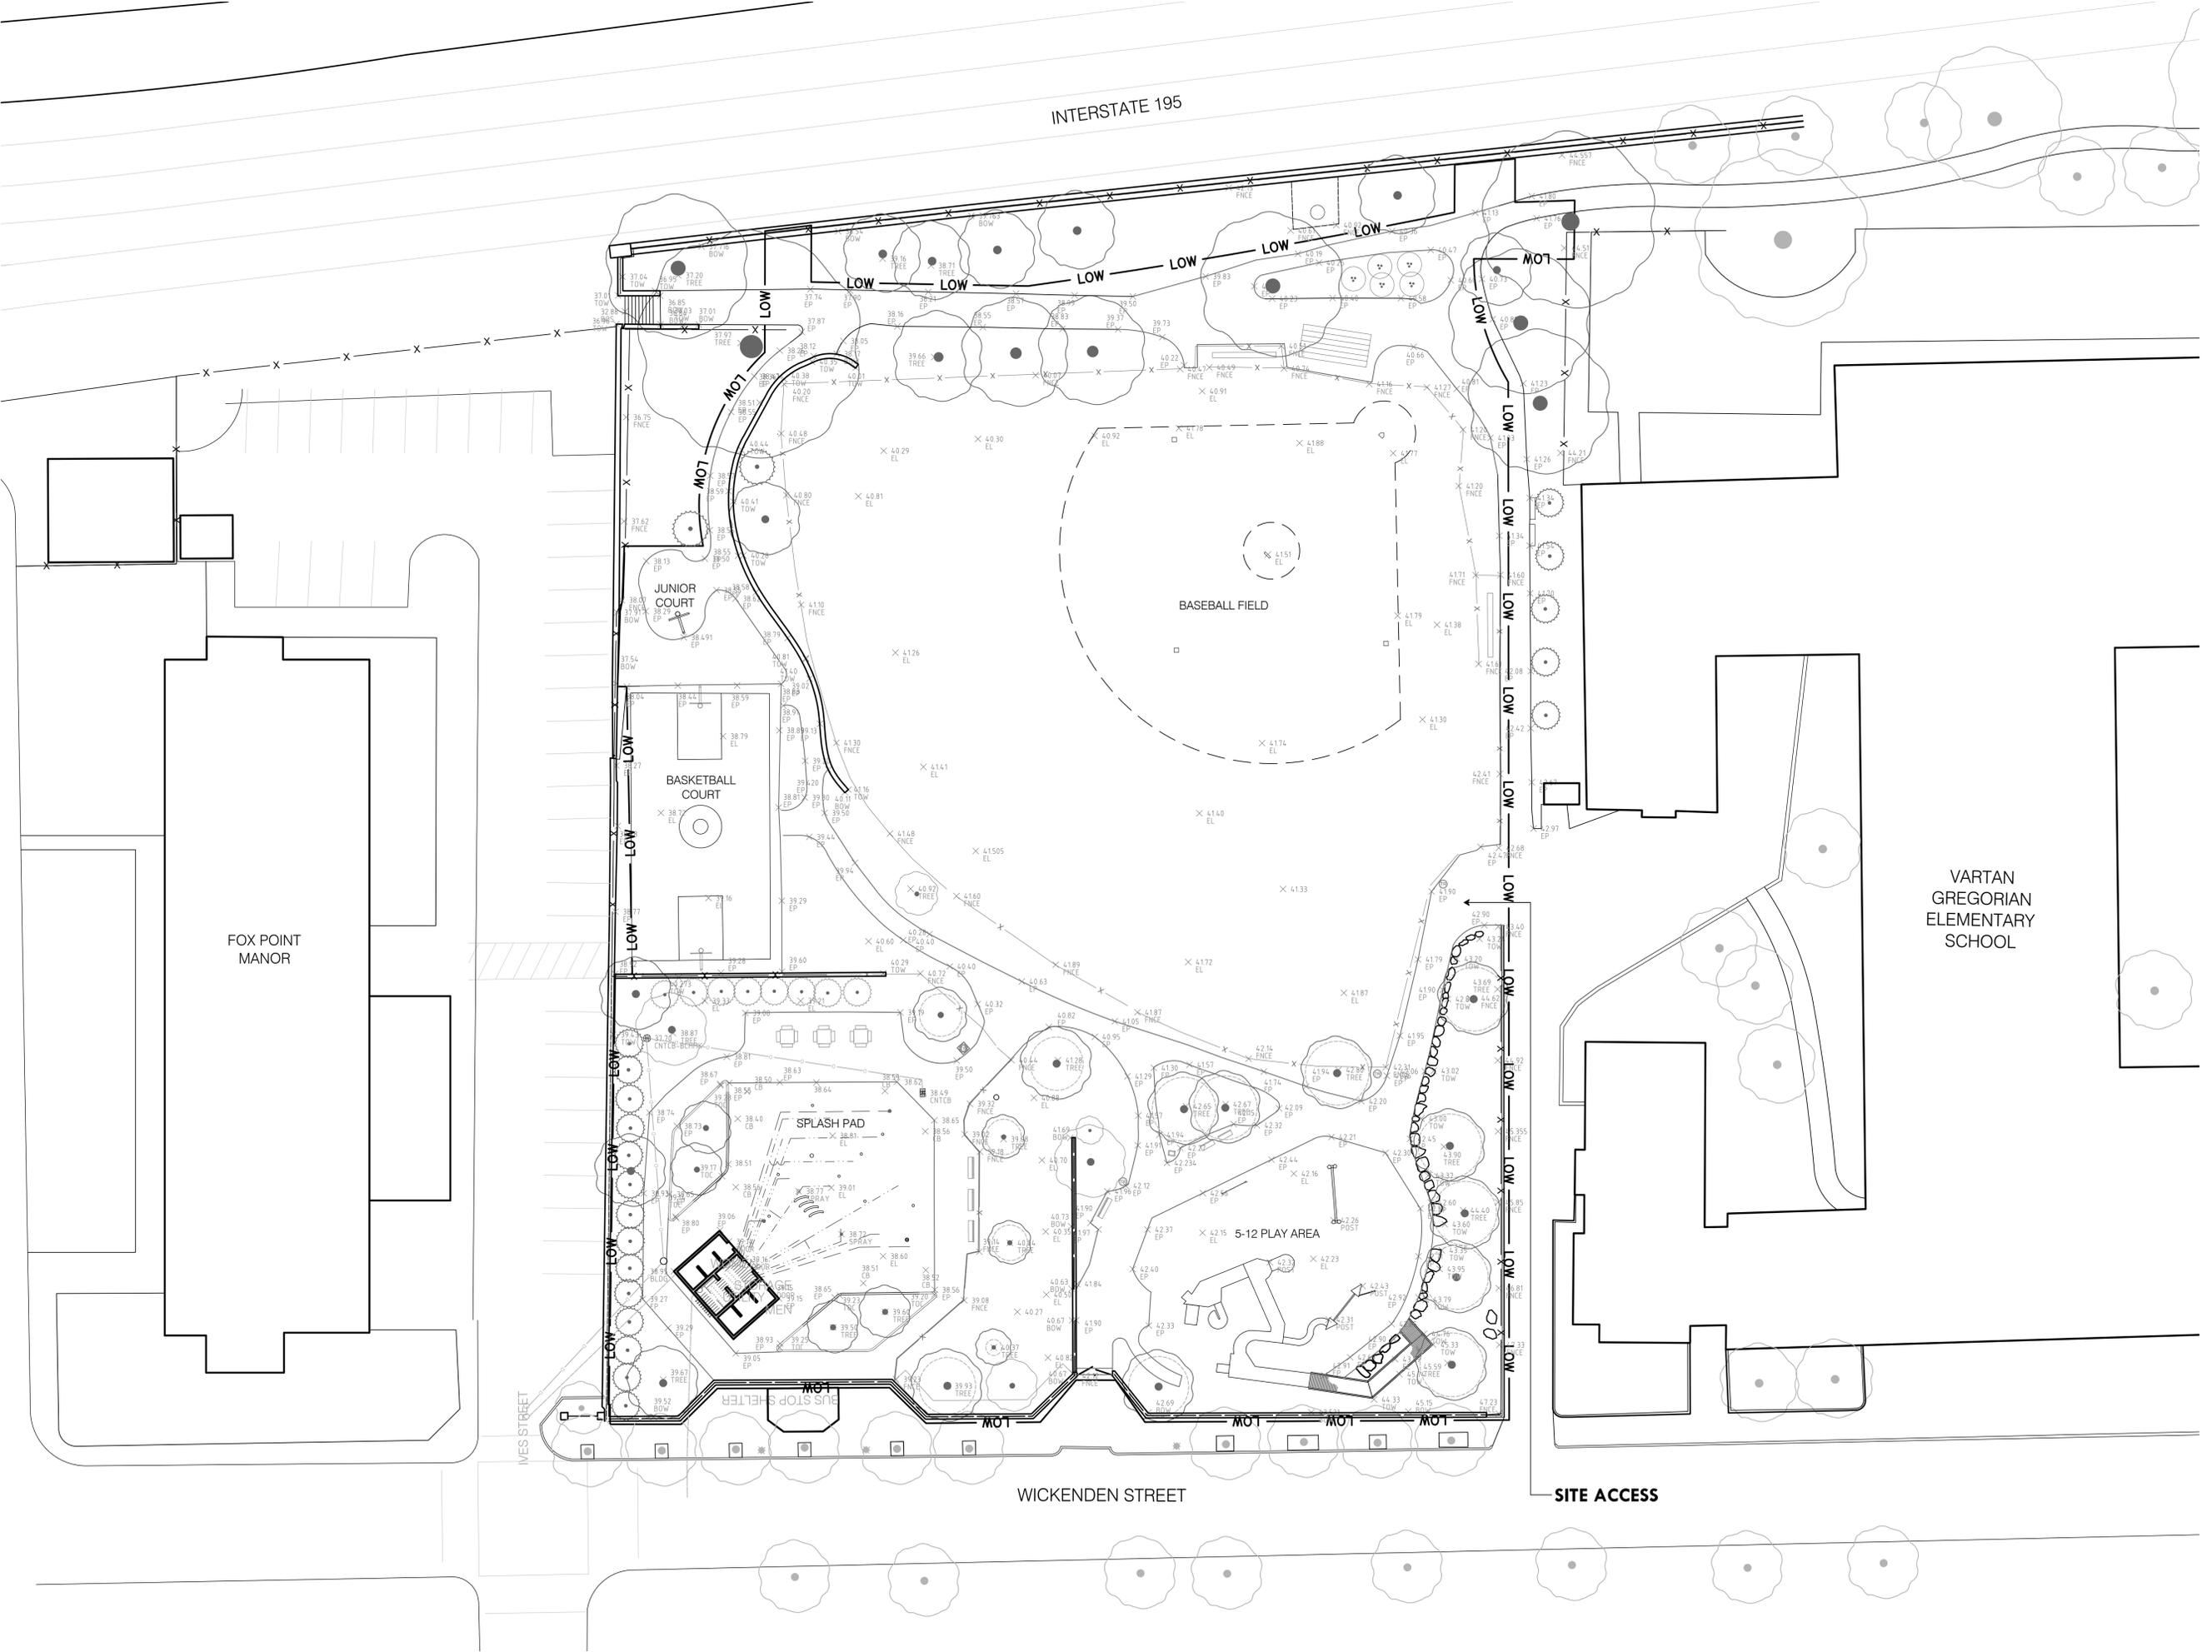



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP


PROJECT:
Site Improvements at Cabral Park

515 Wickenden Street
Providence, RI


REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE



SCALE: 1"=10'

DRAWING INFO

DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Demolition Plan (North)

L-3.1

3 OF 23

DEMOLITION PLAN LEGEND

NOTE: PARKS DEPARTMENT PERSONNEL TO REMOVE FENCING, SITE FURNISHINGS AND PLAY EQUIPMENT PRIOR TO MOBILIZATION.

- LOW — LOW — LIMIT OF WORK
- ~~~~~ TREE PROTECTION FENCE BY OTHERS. CONTRACTOR RESPONSIBLE FOR MAINTENANCE
- /////// SAWCUT
- ⊗ ⊗ EXISTING TREE TO BE REMOVED BY OTHERS
- SS — SILT SOCK
- R&D REMOVE & DISPOSE
- R&S REMOVE & STOCKPILE
- [] LIMIT OF FENCE OR WALL REMOVAL
- [] R&D EX. ASPHALT & GRAVEL BASE
- [] R&D TURF & TOPSOIL TO 12" DEPTH
- [] R&D EX. CONCRETE & GRAVEL BASE
- [] AREA TO BE RE-GRADED; STRIP TURF, SCREEN & AMEND SOIL
- X — EXISTING FENCE TO REMAIN
- X — FENCE & POSTS TO BE REMOVED

MATCHLINE 3.1
SEE SHEET L-3.2

NO REMOVAL
BEYOND SILT SOCK

R&D BASKETBALL
HOOPS & BACKBOARDS.

ASPHALT BETWEEN
SAWCUT AND EX. WALL
TO REMAIN

INV IN: ±35.9
INV OUT: NOT FOUND
EL OF SUMP: ±32.35
WATER LEVEL: ±36.2

R&D (3) PICNIC TABLES
& FOOTINGS.
BY OTHERS

R&D CURBING TO
LIMITS SHOWN

R&D CONCRETE SPLASH
PAD & BASE, ALL
SUBGRADE WATER
LINES & DRAINS, & ALL
SPLASH PAD FEATURES.

R&D (3) BENCHES &
FOOTINGS.
BY OTHERS
R&S ACTIVATOR

R&D CHAIN LINK
FENCING & FOOTINGS
TO LIMITS SHOWN. BY
OTHERS

SEE SHEET L-3.2
FOR INTERIOR
PIPING DEMO

R&D CURBING TO
LIMITS SHOWN

R&D TREE, TYP.
BY OTHERS

R&D FENCE &
RETAINING WALL TO
EXTENTS SHOWN

R&S TRASH RECEPTACLE.
BY OTHERS

R&D RETAINING
WALL AND TUBE
RAILING TO
LIMITS SHOWN

R&D BENCH & FOOTINGS.
BY OTHERS

R&S STONE MONUMENT

R&D BENCHES & FOOTINGS.
BY OTHERS

R&D ALL CHAIN LINK BASEBALL
FENCE, GATES AND FOOTING.
BY OTHERS

R&S TRASH RECEPTACLES, TYP.
BY OTHERS

REMOVE AND DISPOSE
ASPHALT AND BASE. USE
HAND TOOLS AT BASE OF
TREES TO PREVENT TREE
INJURY, TYP.
BY OTHERS

R&D SWING SET & FOOTINGS.
BY OTHERS

R&D PLAYGROUND
MULCH

R&D PLAY STRUCTURE &
FOOTINGS.
BY OTHERS

R&S BOULDERS (5)

R&D RAMP & FOOTINGS.
BY OTHERS

FILE: CABR23.01-PLANS.dwg



**PROVIDENCE
PARKS DEPARTMENT**
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF
PROVIDENCE PARKS
DEPARTMENT, ALL RIGHTS
RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
REPRODUCED, STORED IN A RETRIEVAL
SYSTEM OR TRANSMITTED IN ANY FORM OR
BY ANY MEANS, ELECTRONIC,
MECHANICAL, PHOTOCOPYING,
RECORDING OR OTHERWISE WITHOUT THE
PRIOR WRITTEN PERMISSION OF THE CITY OF
PROVIDENCE PARKS DEPARTMENT. ANY
MODIFICATIONS TO THIS DOCUMENT
WITHOUT THE WRITTEN PERMISSION OF
THE CITY OF PROVIDENCE PARKS
DEPARTMENT SHALL RENDER IT INVALID
AND UNUSABLE.

STAMP

PROJECT:


**Site Improvements at
Cabral Park**

**515 Wickenden Street
Providence, RI**


REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE



DRAWING INFO


DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

**Demolition
Plan (South)**

L-3.2

4 OF 23

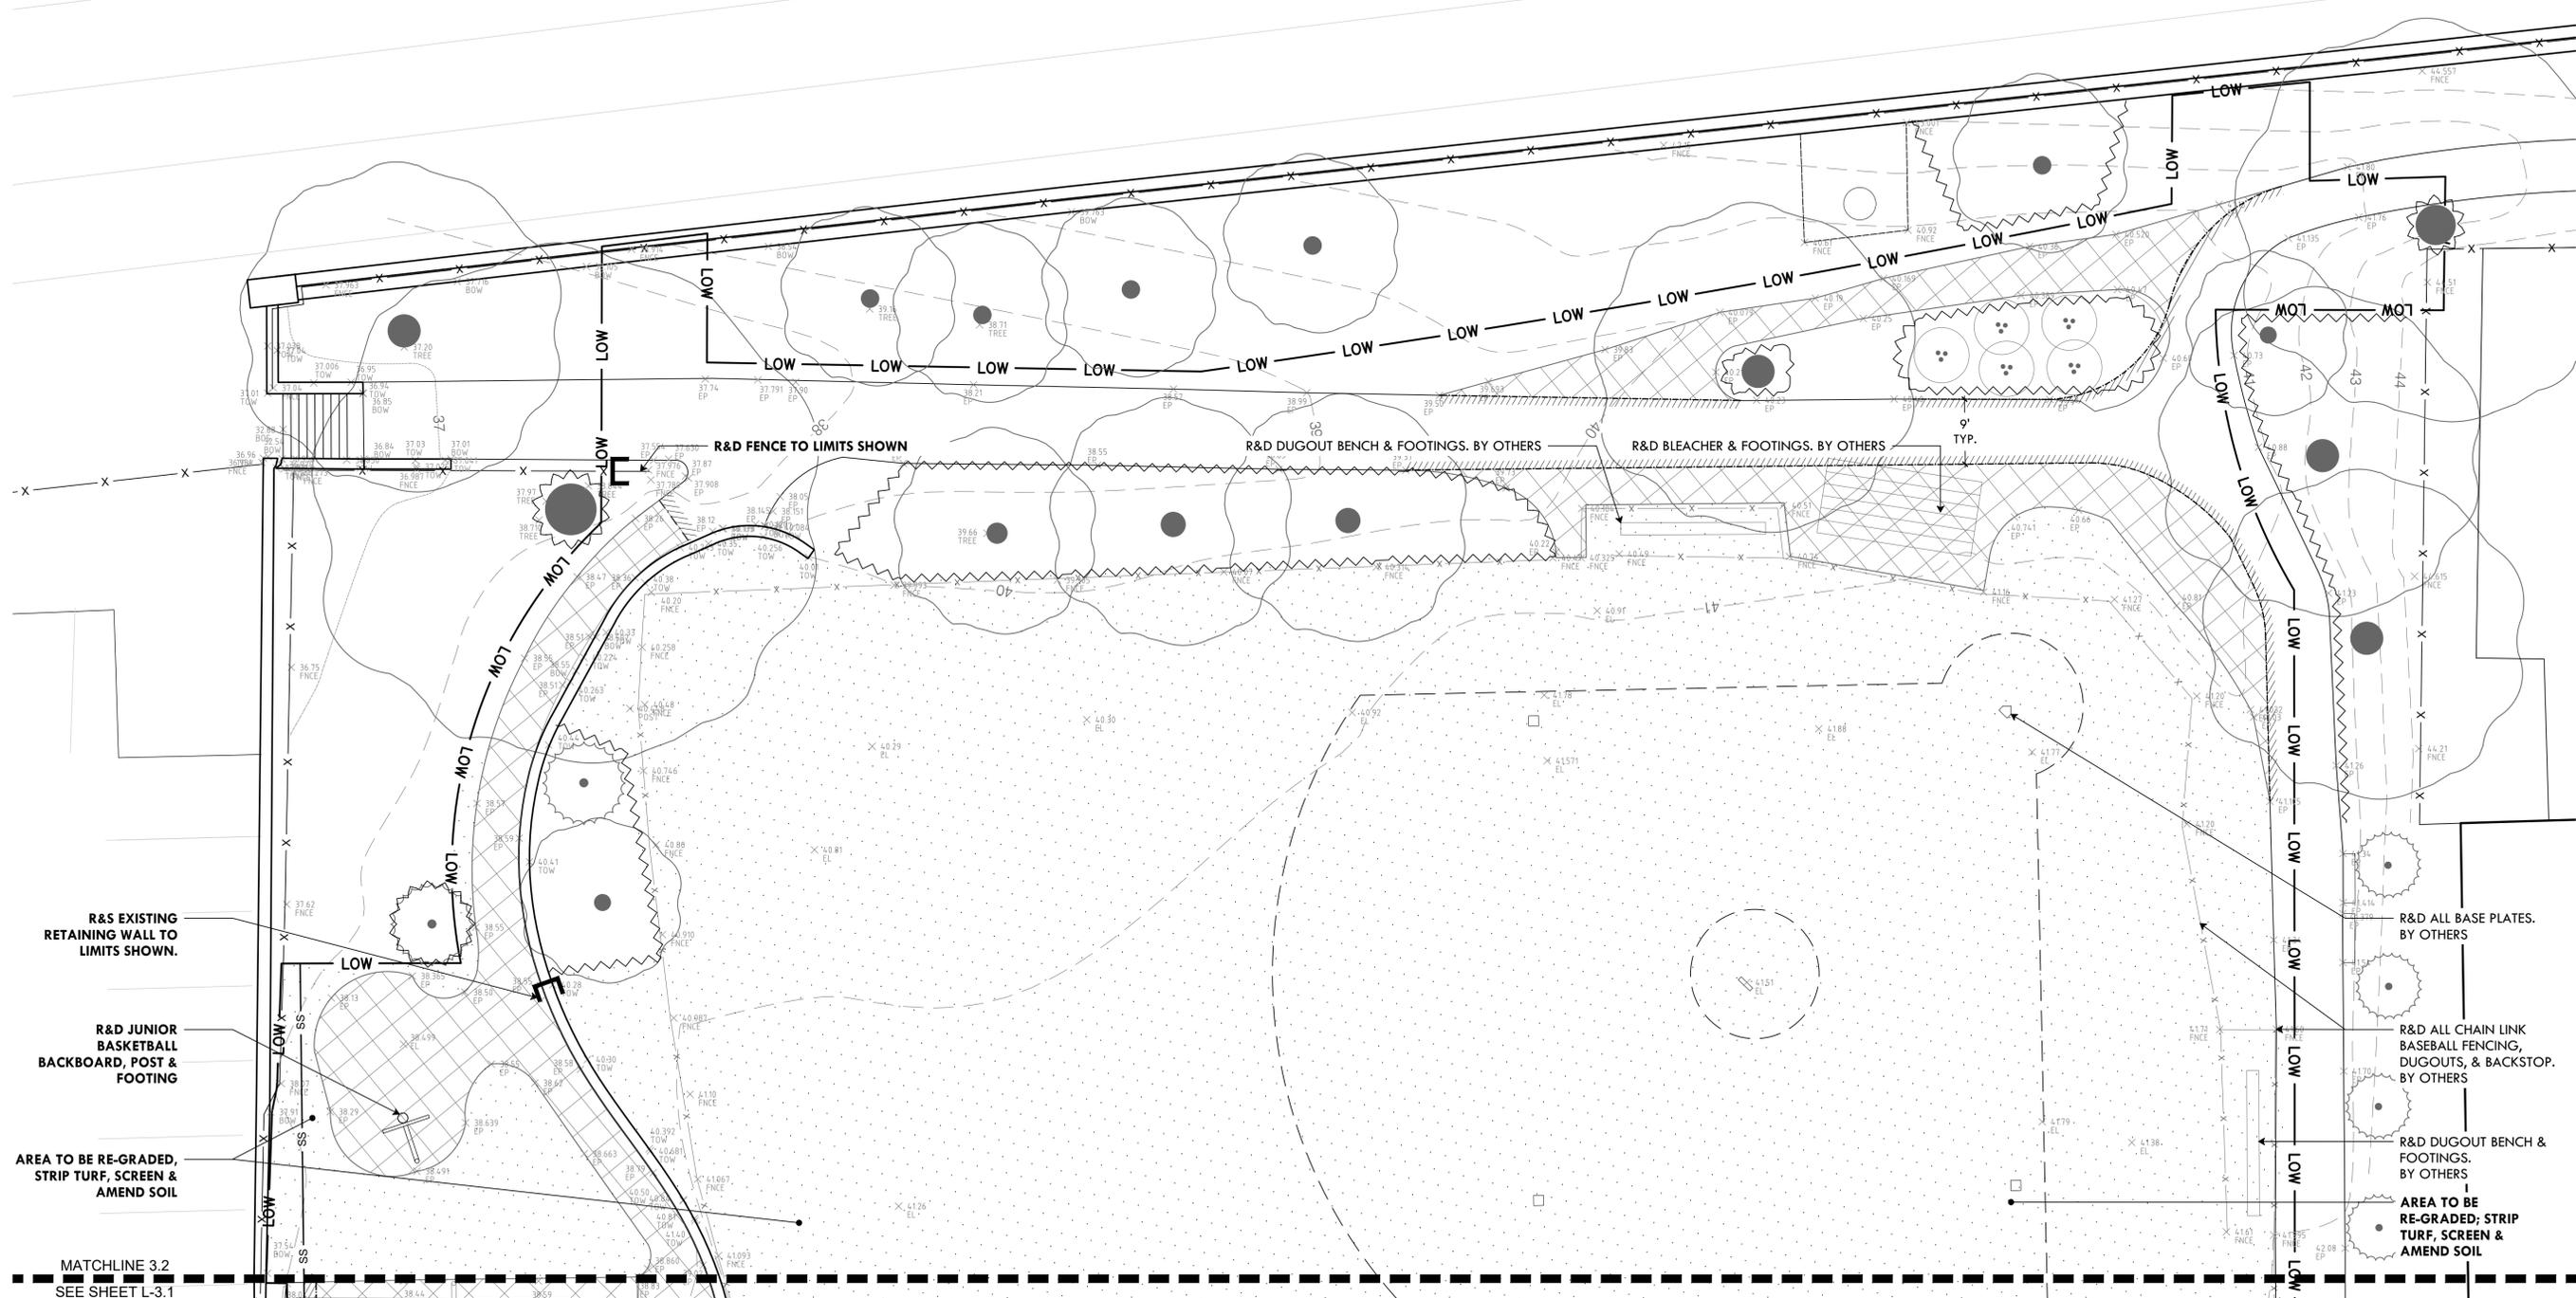

DEMOLITION PLAN LEGEND

- LOW — LIMIT OF WORK
- ~~~~~ TREE PROTECTION FENCE
- ////// SAWCUT
- (X) (X) EXISTING TREE TO BE REMOVED
- SS — SILT SOCK
- R&D REMOVE & DISPOSE
- R&S REMOVE & STOCKPILE
- [X] [X] EXISTING FENCE TO REMAIN
- [X] [X] FENCE & POSTS TO BE REMOVED
- [] [] LIMIT OF FENCE OR WALL REMOVAL
- [] [] R&D EX. ASPHALT & GRAVEL BASE
- [] [] STRIP TURF & TOPSOIL TO 12" DEPTH
- [] [] R&D EX. CONCRETE & GRAVEL BASE
- [] [] AREA TO BE RE-GRADED, STRIP TURF, SCREEN & AMEND SOIL



REMOVE AND STOCKPILE EX. ACTIVATOR



REMOVE AND REPLACE GATE VALVE WITH 2" BALL VALVE



FLUSH CUT AND DISPOSE ALL VALVES, MANIFOLD AND PIPING. GRIND SMOOTH ANY SHARP EDGES.

- RECONNECT BATHROOM WATERLINE AFTER NEW BACKFLOW PREVENTER R&D WATER TANK
- R&S MAESTRO 2 CONTROLLER
- REMOVE AND REPLACE BACKFLOW PREVENTER. SUPPORT AS NEEDED WITH BRACKETS.
- F&I BOILER DRAIN VALVE
- R&D EXISTING MANIFOLD
- R&S WATER METER
- R&D EXISTING PIPES AND VALVES
- EXISTING 2" WATER LINE
- CORE THROUGH WALL TO ACCOMMODATE 2" WATER LINE FOR SPRAY PAD PLUMBING



SAWCUT AND DISPOSE CONCRETE 18" FROM WALL TO ACCOMMODATE NEW MANIFOLD PIPING

MATCHLINE 4.1
SEE SHEET L-4.2



**PROVIDENCE
PARKS DEPARTMENT**
DAIRY/PLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



**Providence
Parks**

COPYRIGHT (C) CITY OF
PROVIDENCE PARKS
DEPARTMENT, ALL RIGHTS
RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
REPRODUCED, STORED IN A RETRIEVAL
SYSTEM OR TRANSMITTED IN ANY FORM OR
BY ANY MEANS, ELECTRONIC,
MECHANICAL, PHOTOCOPIING,
RECORDING OR OTHERWISE WITHOUT THE
PRIOR WRITTEN PERMISSION OF THE CITY OF
PROVIDENCE PARKS DEPARTMENT. ANY
MODIFICATIONS TO THIS DOCUMENT
WITHOUT THE WRITTEN PERMISSION OF
THE CITY OF PROVIDENCE PARKS
DEPARTMENT SHALL RENDER IT INVALID
AND UNUSABLE.

STAMP

PROJECT:


**Site Improvements at
Cabral Park**

**515 Wickenden Street
Providence, RI**


REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE



SCALE: 1"=10'

DRAWING INFO


DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

**Grading & Utilities
Plan (North)**

L-4.1

5 OF 23

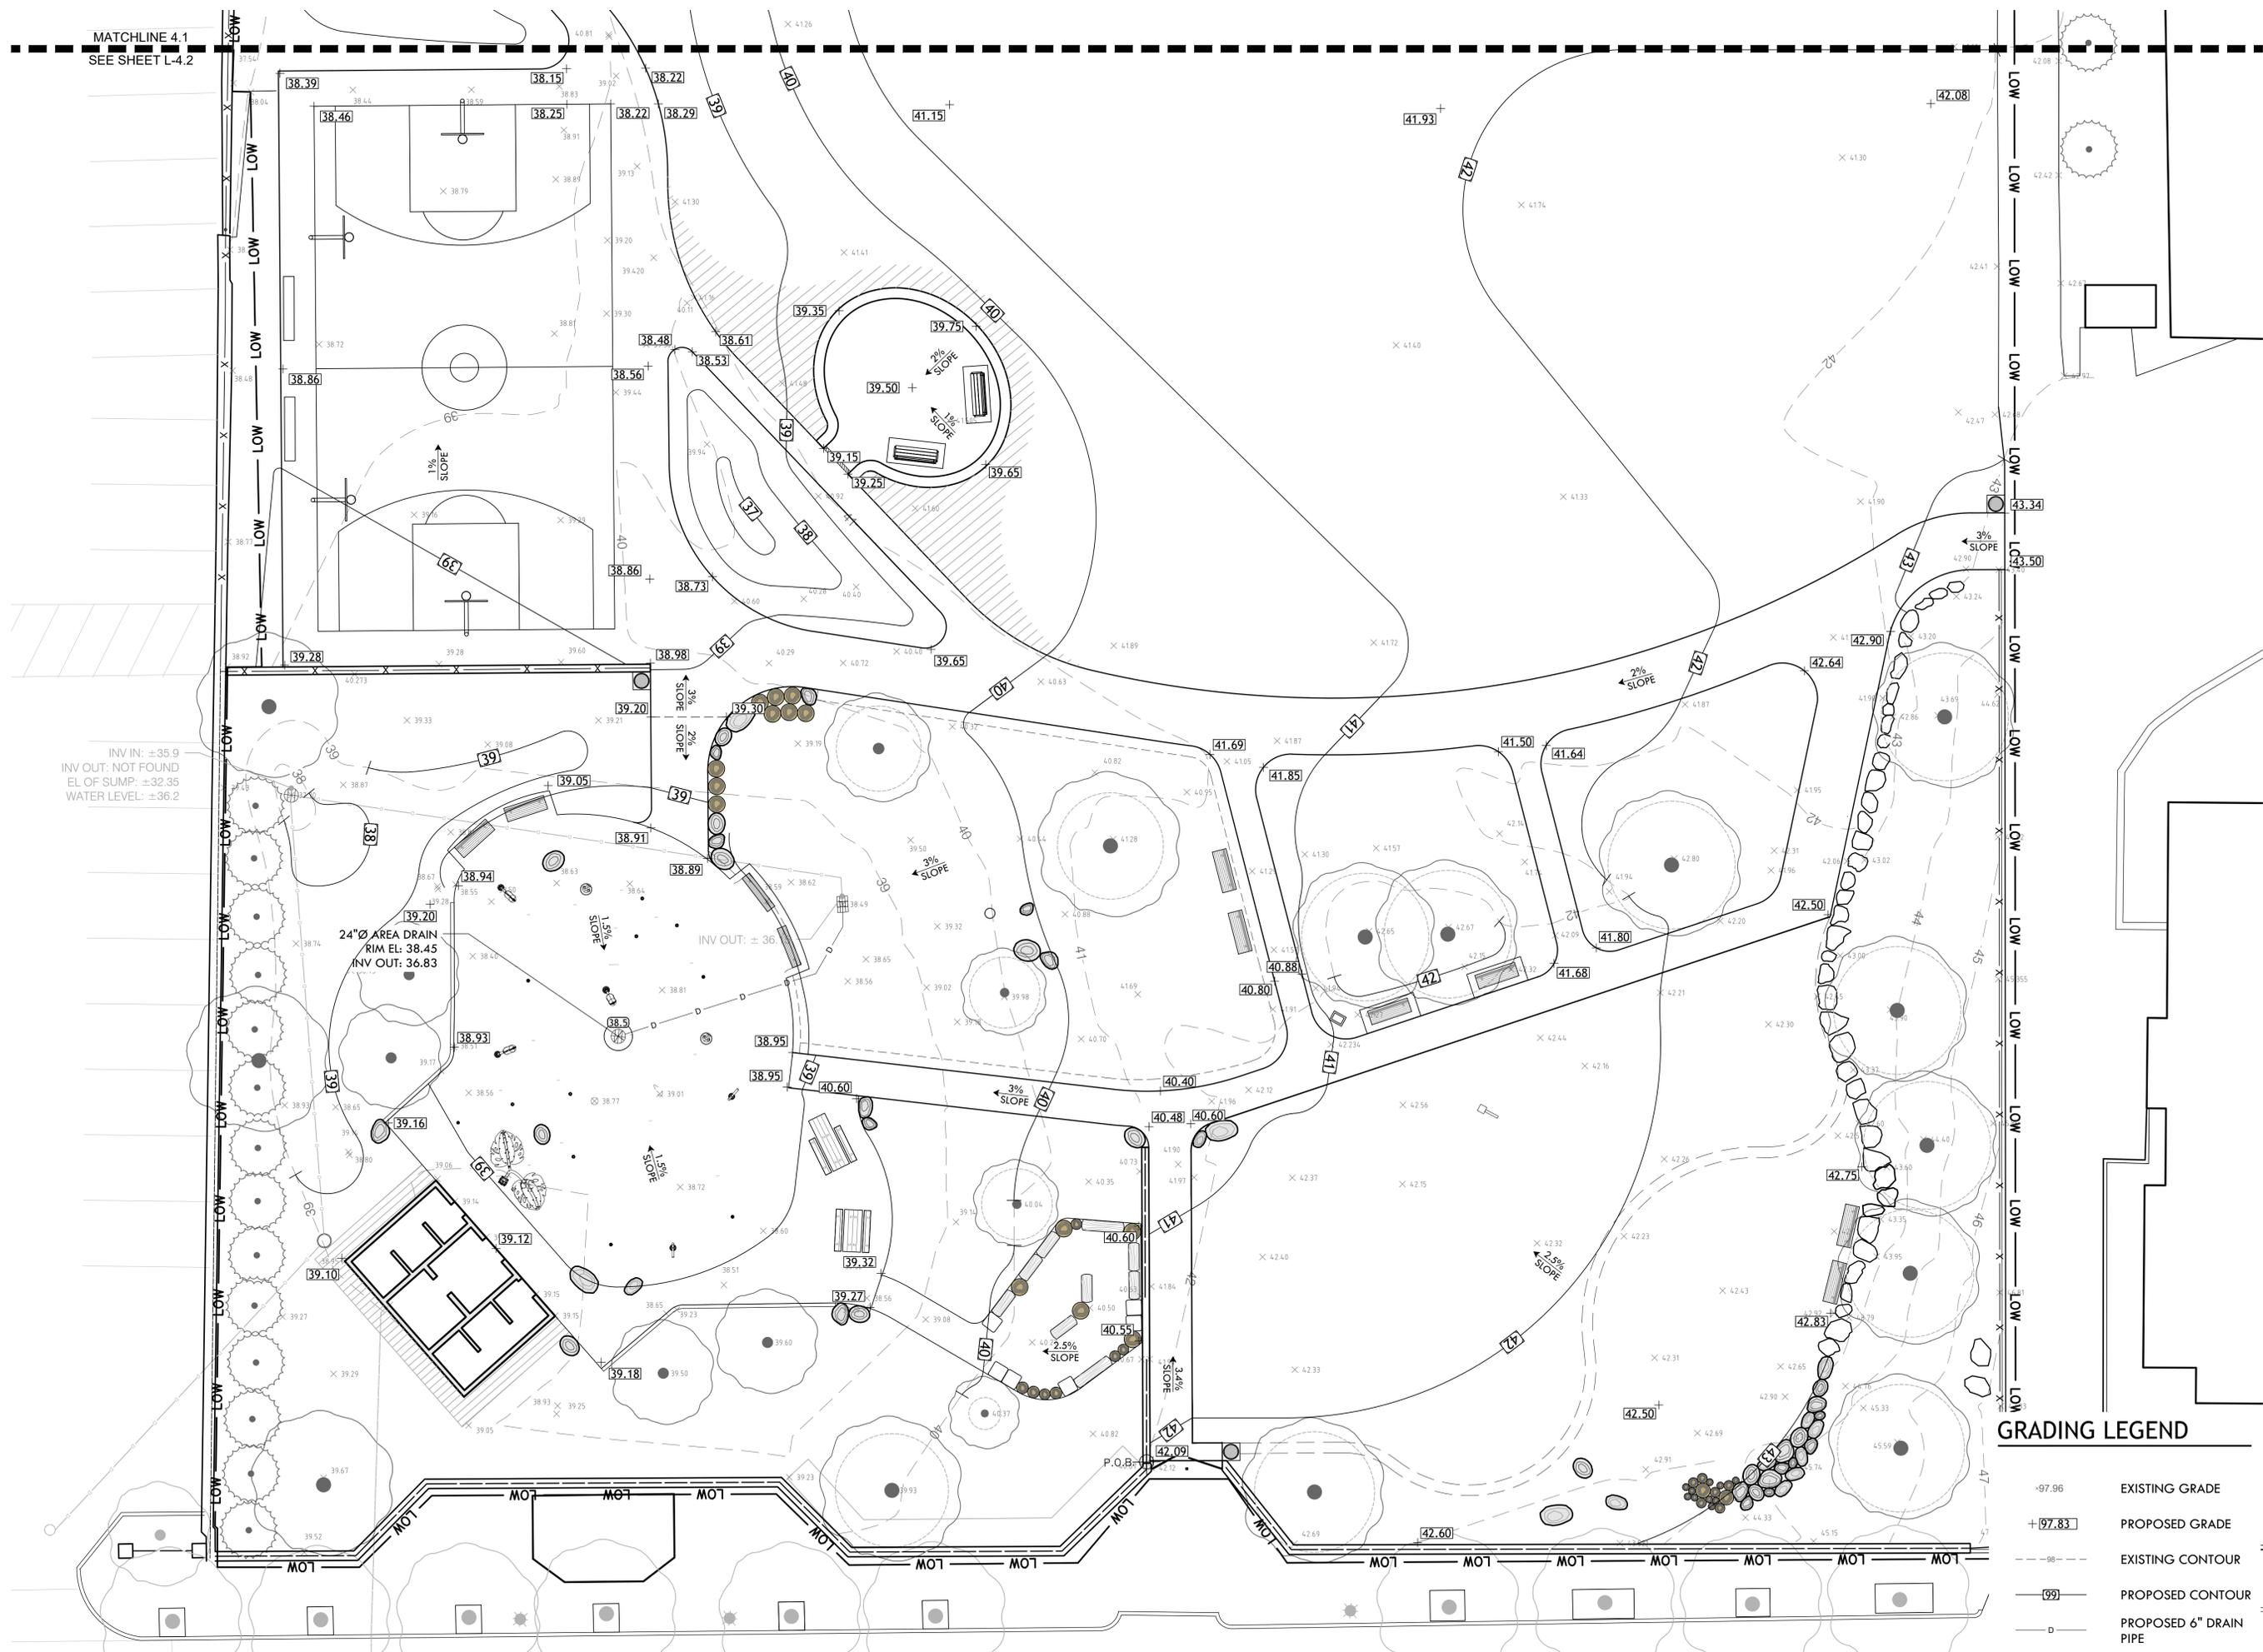

GRADING LEGEND

- 97.96 EXISTING GRADE
- +97.83 PROPOSED GRADE
- - - - EXISTING CONTOUR
- - - - PROPOSED CONTOUR
- - - - PROPOSED 6" DRAIN PIPE

MATERIALS PLAN LEGEND

— LOW —	LIMIT OF WORK		SALVAGED COBBLE PAVING EDGE		DUMOR 6' BENCH W/ BACK, IN-GROUND MOUNT
- X -	4"H CHAIN LINK (CL) MESH		STABILIZED STONEDUST PATH		DUMOR 6' BACKLESS BENCH, IN-GROUND MOUNT
- - -	ROLL-DOWN CURB / HAUNCH		SYNLAWN SURFACING		VESTRE BENCH W/ HIGH BACK AND ARMRESTS
- - -	4"W BLACK VINYL CL GATE		EWf MULCH (12" IN USE ZONES, 6" IN OTHER AREAS)		BENCH ON 4" CONCRETE PAD
- - -	LIMITS OF FENCE/WALL WORK		FLUSH GRANITE CURB		6' PICNIC TABLE AND ADA PICNIC TABLE TMR
	EX. BOULDERS TO REMAIN		EXISTING CONCRETE CURB TO REMAIN		GRANITE BLOCK SEAT
	3" ASPHALT PAVING		55 GAL TRASH RECEPTACLE, SURFACE MOUNT ON CONCRETE PAD ROUNDED, NATIVE BOULDERS (NEW & FROM STOCKPILE)		4' L AND 6' LONG WOOD LOG BENCH
	4" POURED CONCRETE		LOG SEAT/STEEPERS, DIA. VARIES.		



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.



STAMP

PROJECT:
Site Improvements at Cabral Park


515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:



DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG
SHEET TITLE
Materials Plan (North)

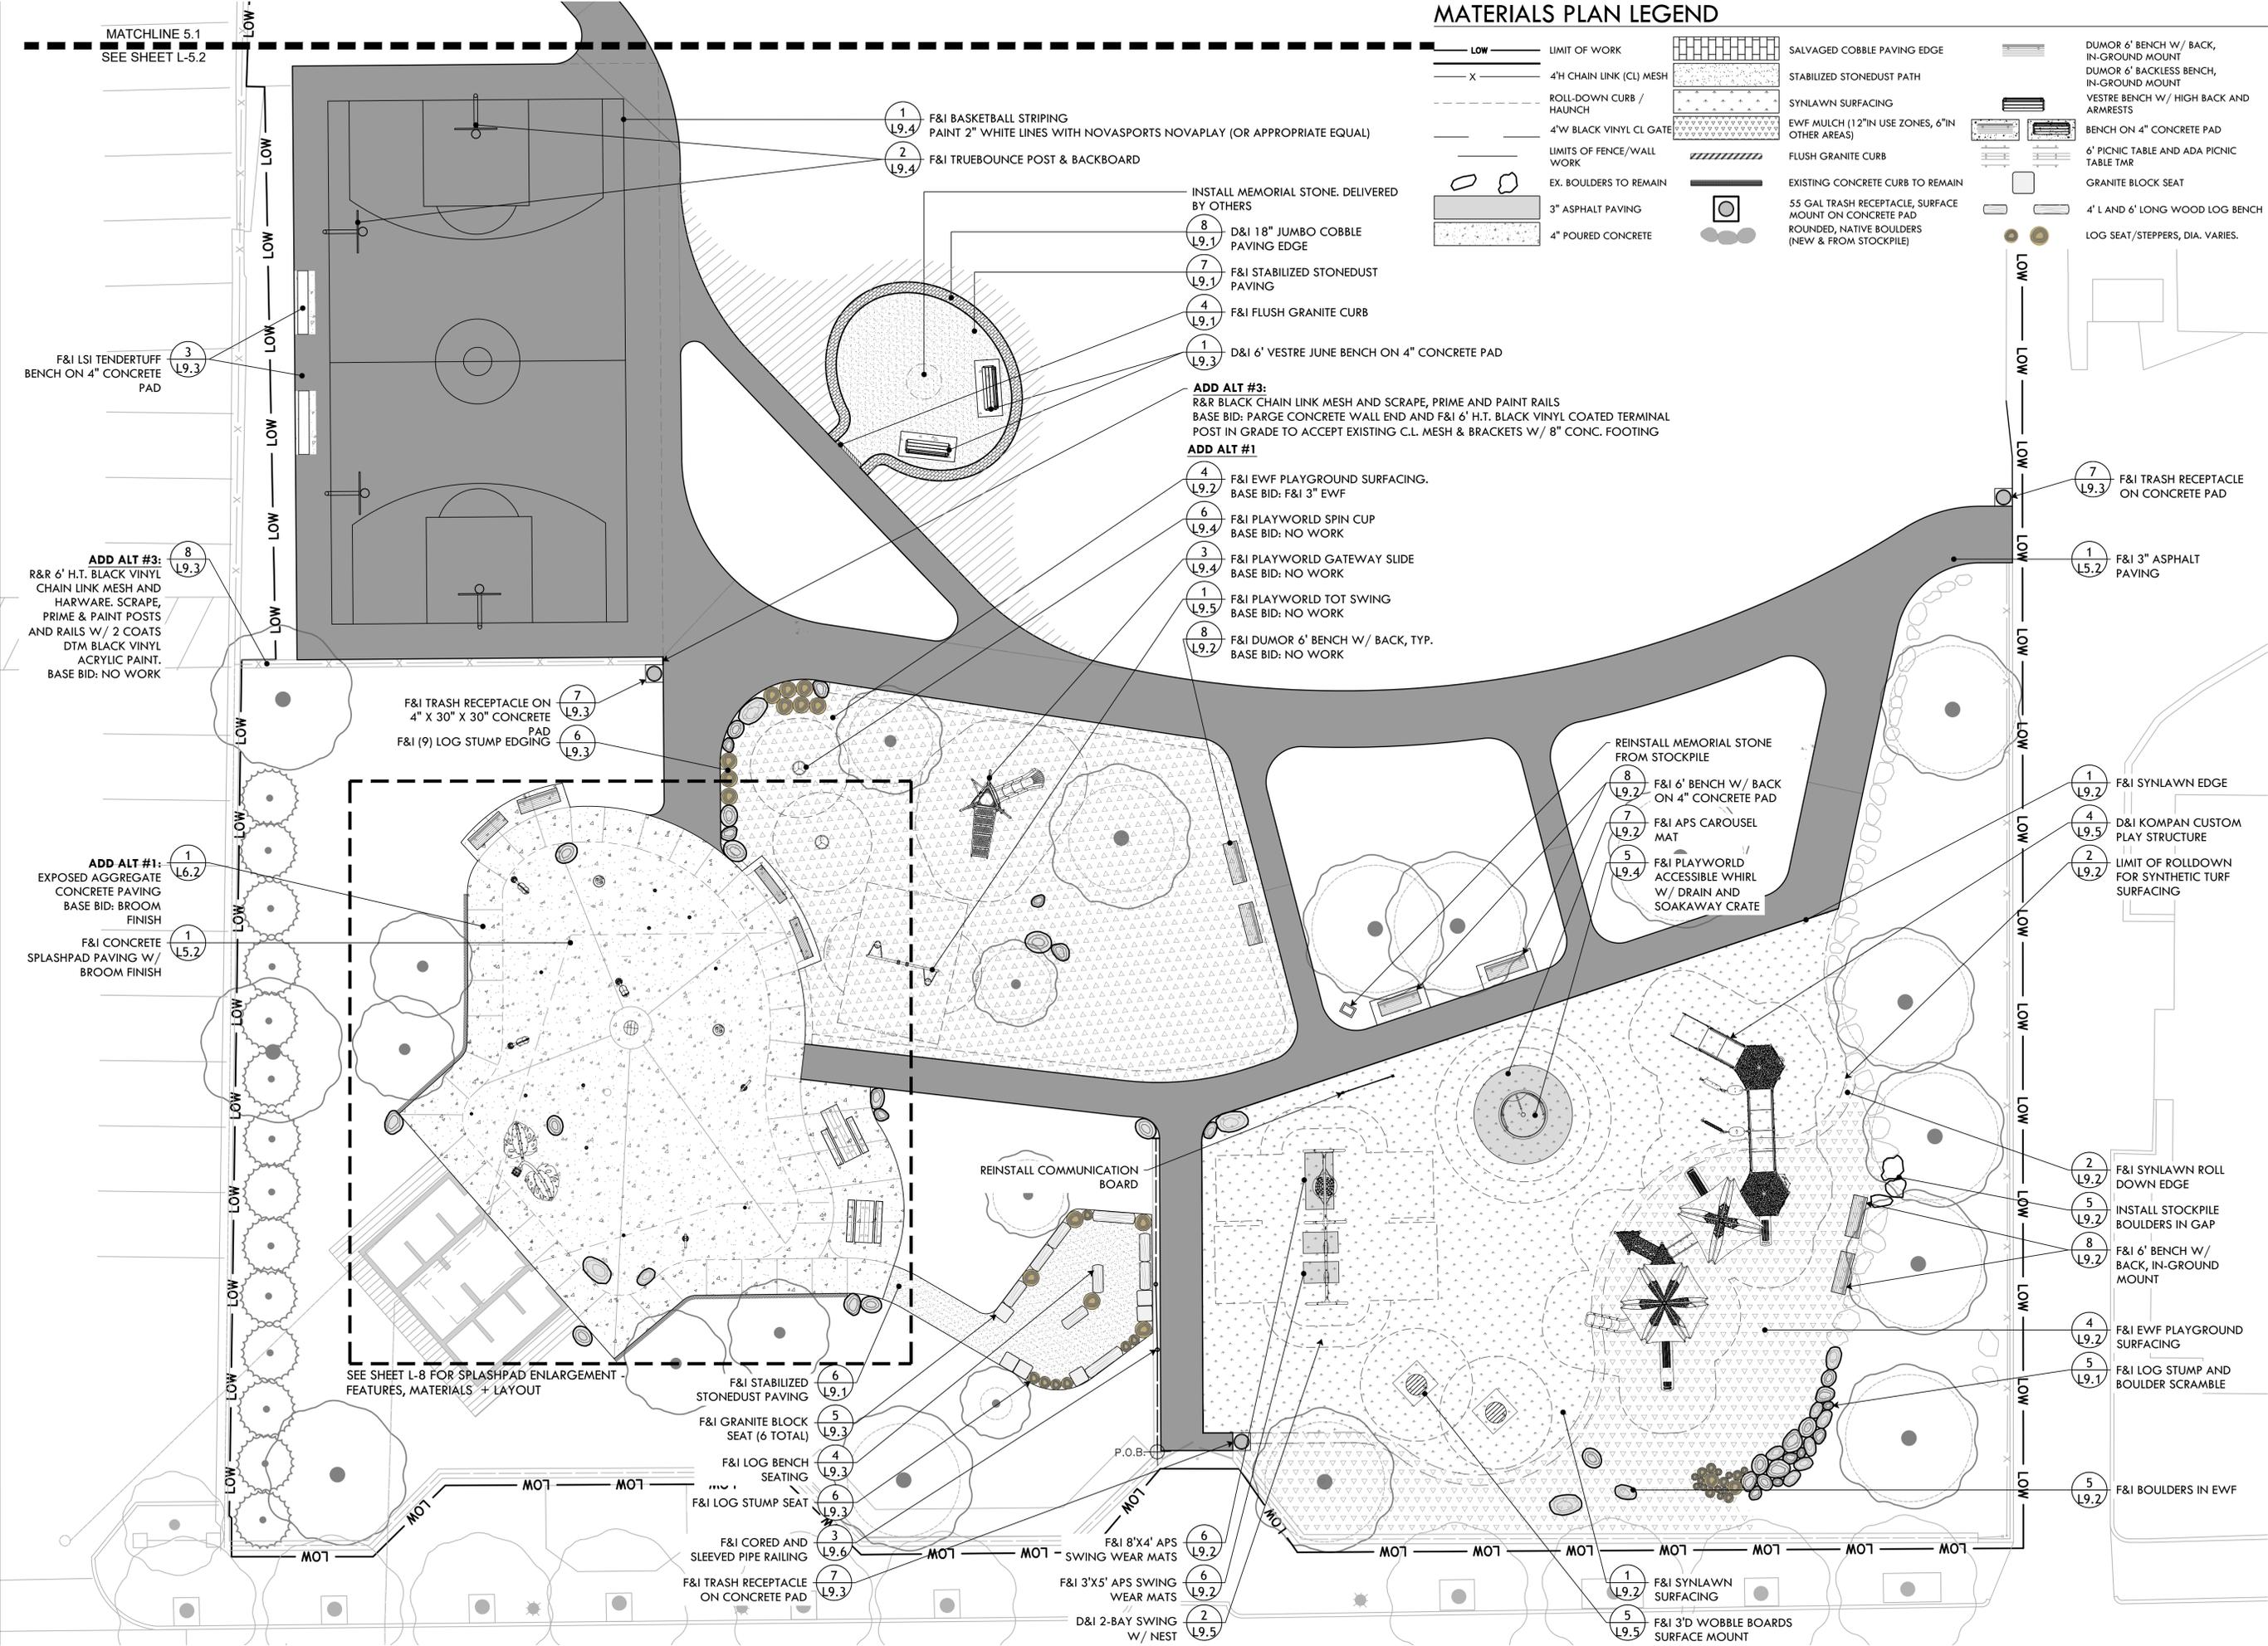

MATCHLINE 5.1
SEE SHEET L-5.2

SEE SHEET L-8 FOR SPLASHPAD ENLARGEMENT - FEATURES, MATERIALS + LAYOUT

P.O.B.

FILE: CABR23.01-PLANS.dwg



STAMP

PROJECT:


**Site Improvements at
Cabral Park**

**515 Wickenden Street
Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE



SCALE: 1"=10'

DRAWING INFO


DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Materials Plan


L-5.2

8 OF 23

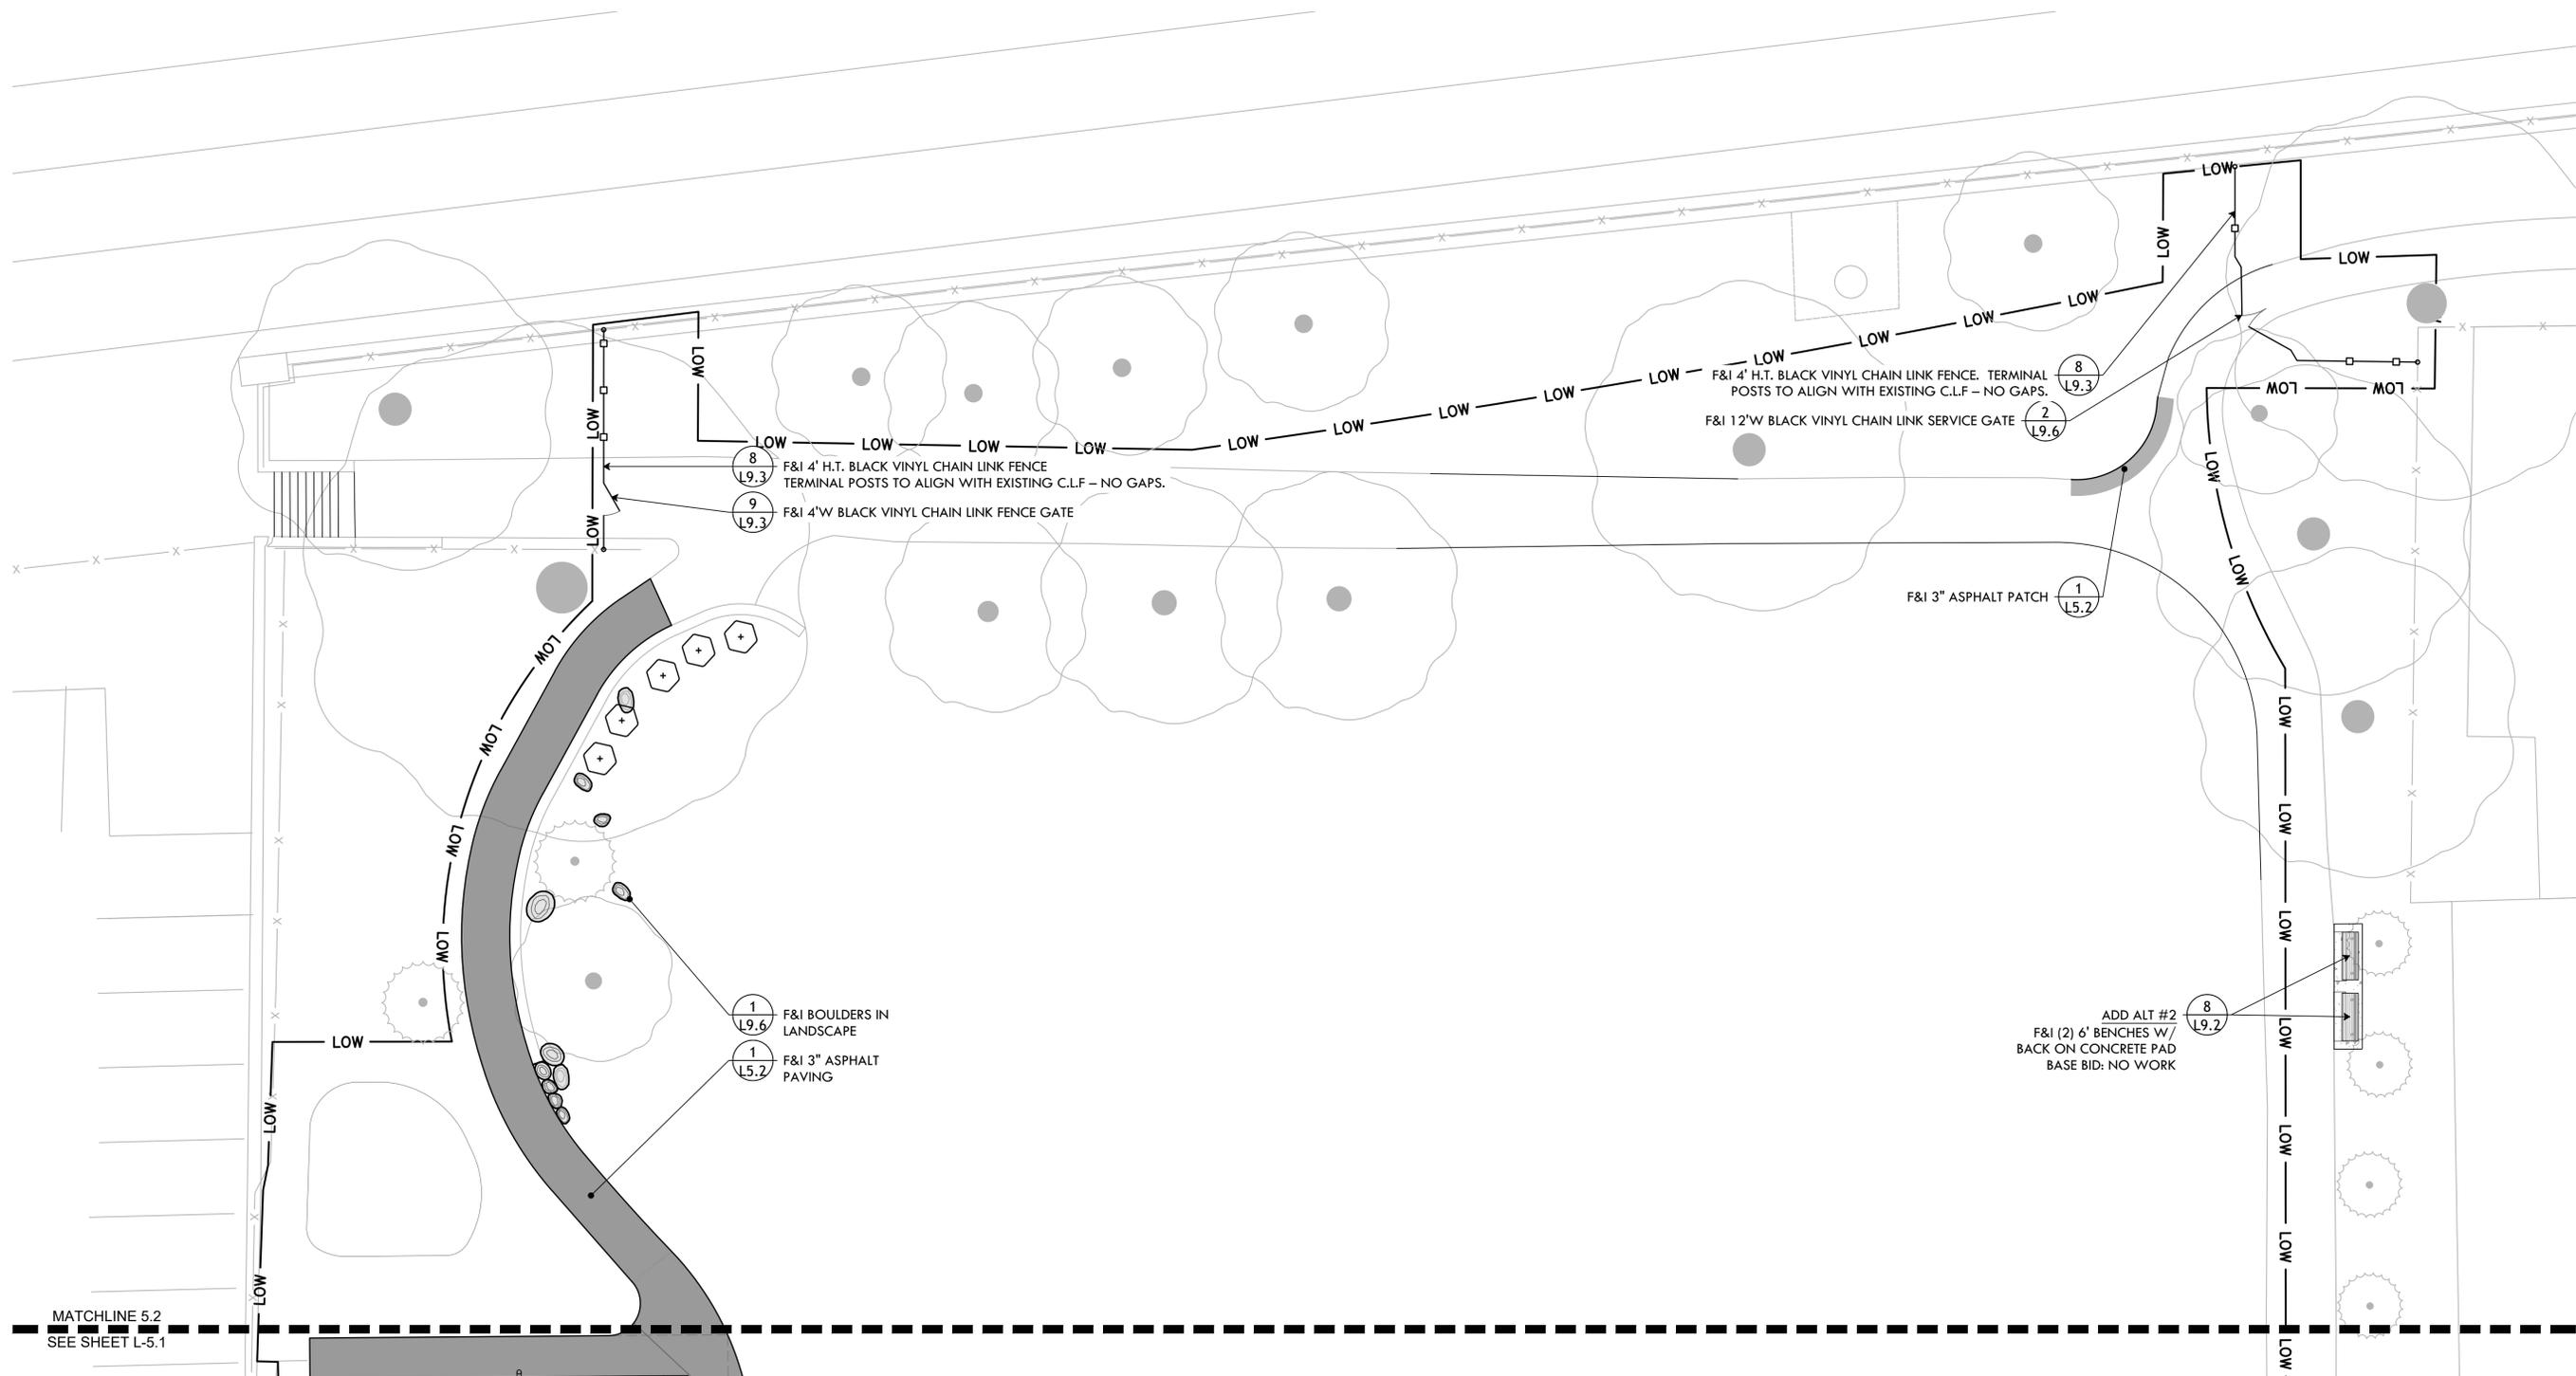


MATERIALS PLAN LEGEND

LOW	LIMIT OF WORK	SALVAGED COBBLE PAVING EDGE	4" H CHAIN LINK (CL) MESH	STABILIZED STONEDUST PATH	DUMOR 6' BENCH W/ BACK, IN-GROUND MOUNT
	4" H CHAIN LINK (CL) MESH	SYNLAWN SURFACING		ROLL-DOWN CURB / HAUNCH	DUMOR 6' BACKLESS BENCH, IN-GROUND MOUNT
	ROLL-DOWN CURB / HAUNCH	EWF MULCH (1 1/2" IN USE ZONES, 6" IN OTHER AREAS)		4" W BLACK VINYL CL GATE	VESTRE BENCH W/ HIGH BACK AND ARMRESTS
	LIMITS OF FENCE/WALL WORK	FLUSH GRANITE CURB		EX. BOULDERS TO REMAIN	BENCH ON 4" CONCRETE PAD
	EX. BOULDERS TO REMAIN	EXISTING CONCRETE CURB TO REMAIN		3" ASPHALT PAVING	6' PICNIC TABLE AND ADA PICNIC TABLE TMR
	3" ASPHALT PAVING	55 GAL TRASH RECEPTACLE, SURFACE MOUNT ON CONCRETE PAD		4" POURED CONCRETE	GRANITE BLOCK SEAT
	4" POURED CONCRETE	ROUNDED, NATIVE BOULDERS (NEW & FROM STOCKPILE)			4' L AND 6' LONG WOOD LOG BENCH
					LOG SEAT/STEPPERS, DIA. VARIES.

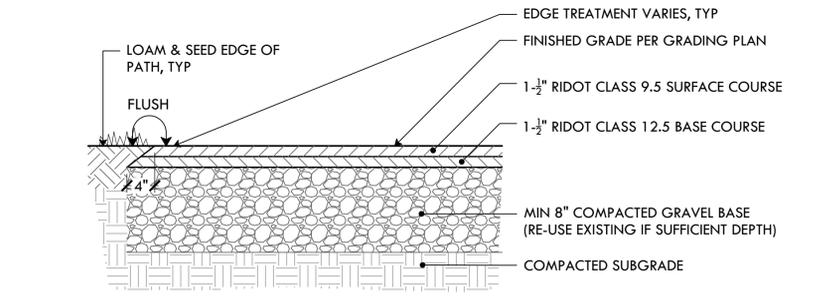

NOTE: PAVEMENT SHALL BE INSTALLED IN ACCORDANCE WITH RIDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION - AUGUST 2024 EDITION

1 3" ASPHALT PAVING
NOT TO SCALE

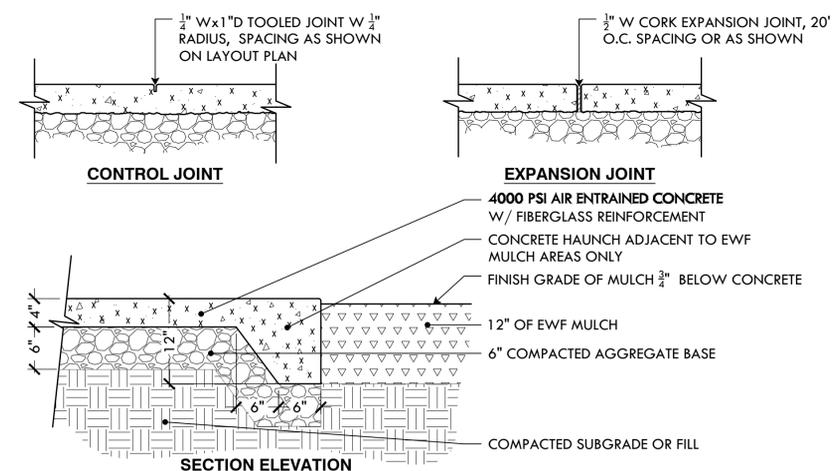

2 4" CONCRETE PAVING
NOT TO SCALE



PROVIDENCE PARKS DEPARTMENT
 DAIRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.



NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
 Site Improvements at Cabral Park
 515 Wickenden Street
 Providence, RI

REVISIONS:

#	Date	Issued For:



DRAWING INFO
 DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG


SHEET TITLE
 Layout Plan (North)

L-6.1
 9 OF 23

LAYOUT LEGEND

- P.O.B. POINT OF BEGINNING
- CENTERLINE
- DIMENSION
- ALIGN EDGES OR FACES

MATCHLINE 6.1
 SEE SHEET L-6.2

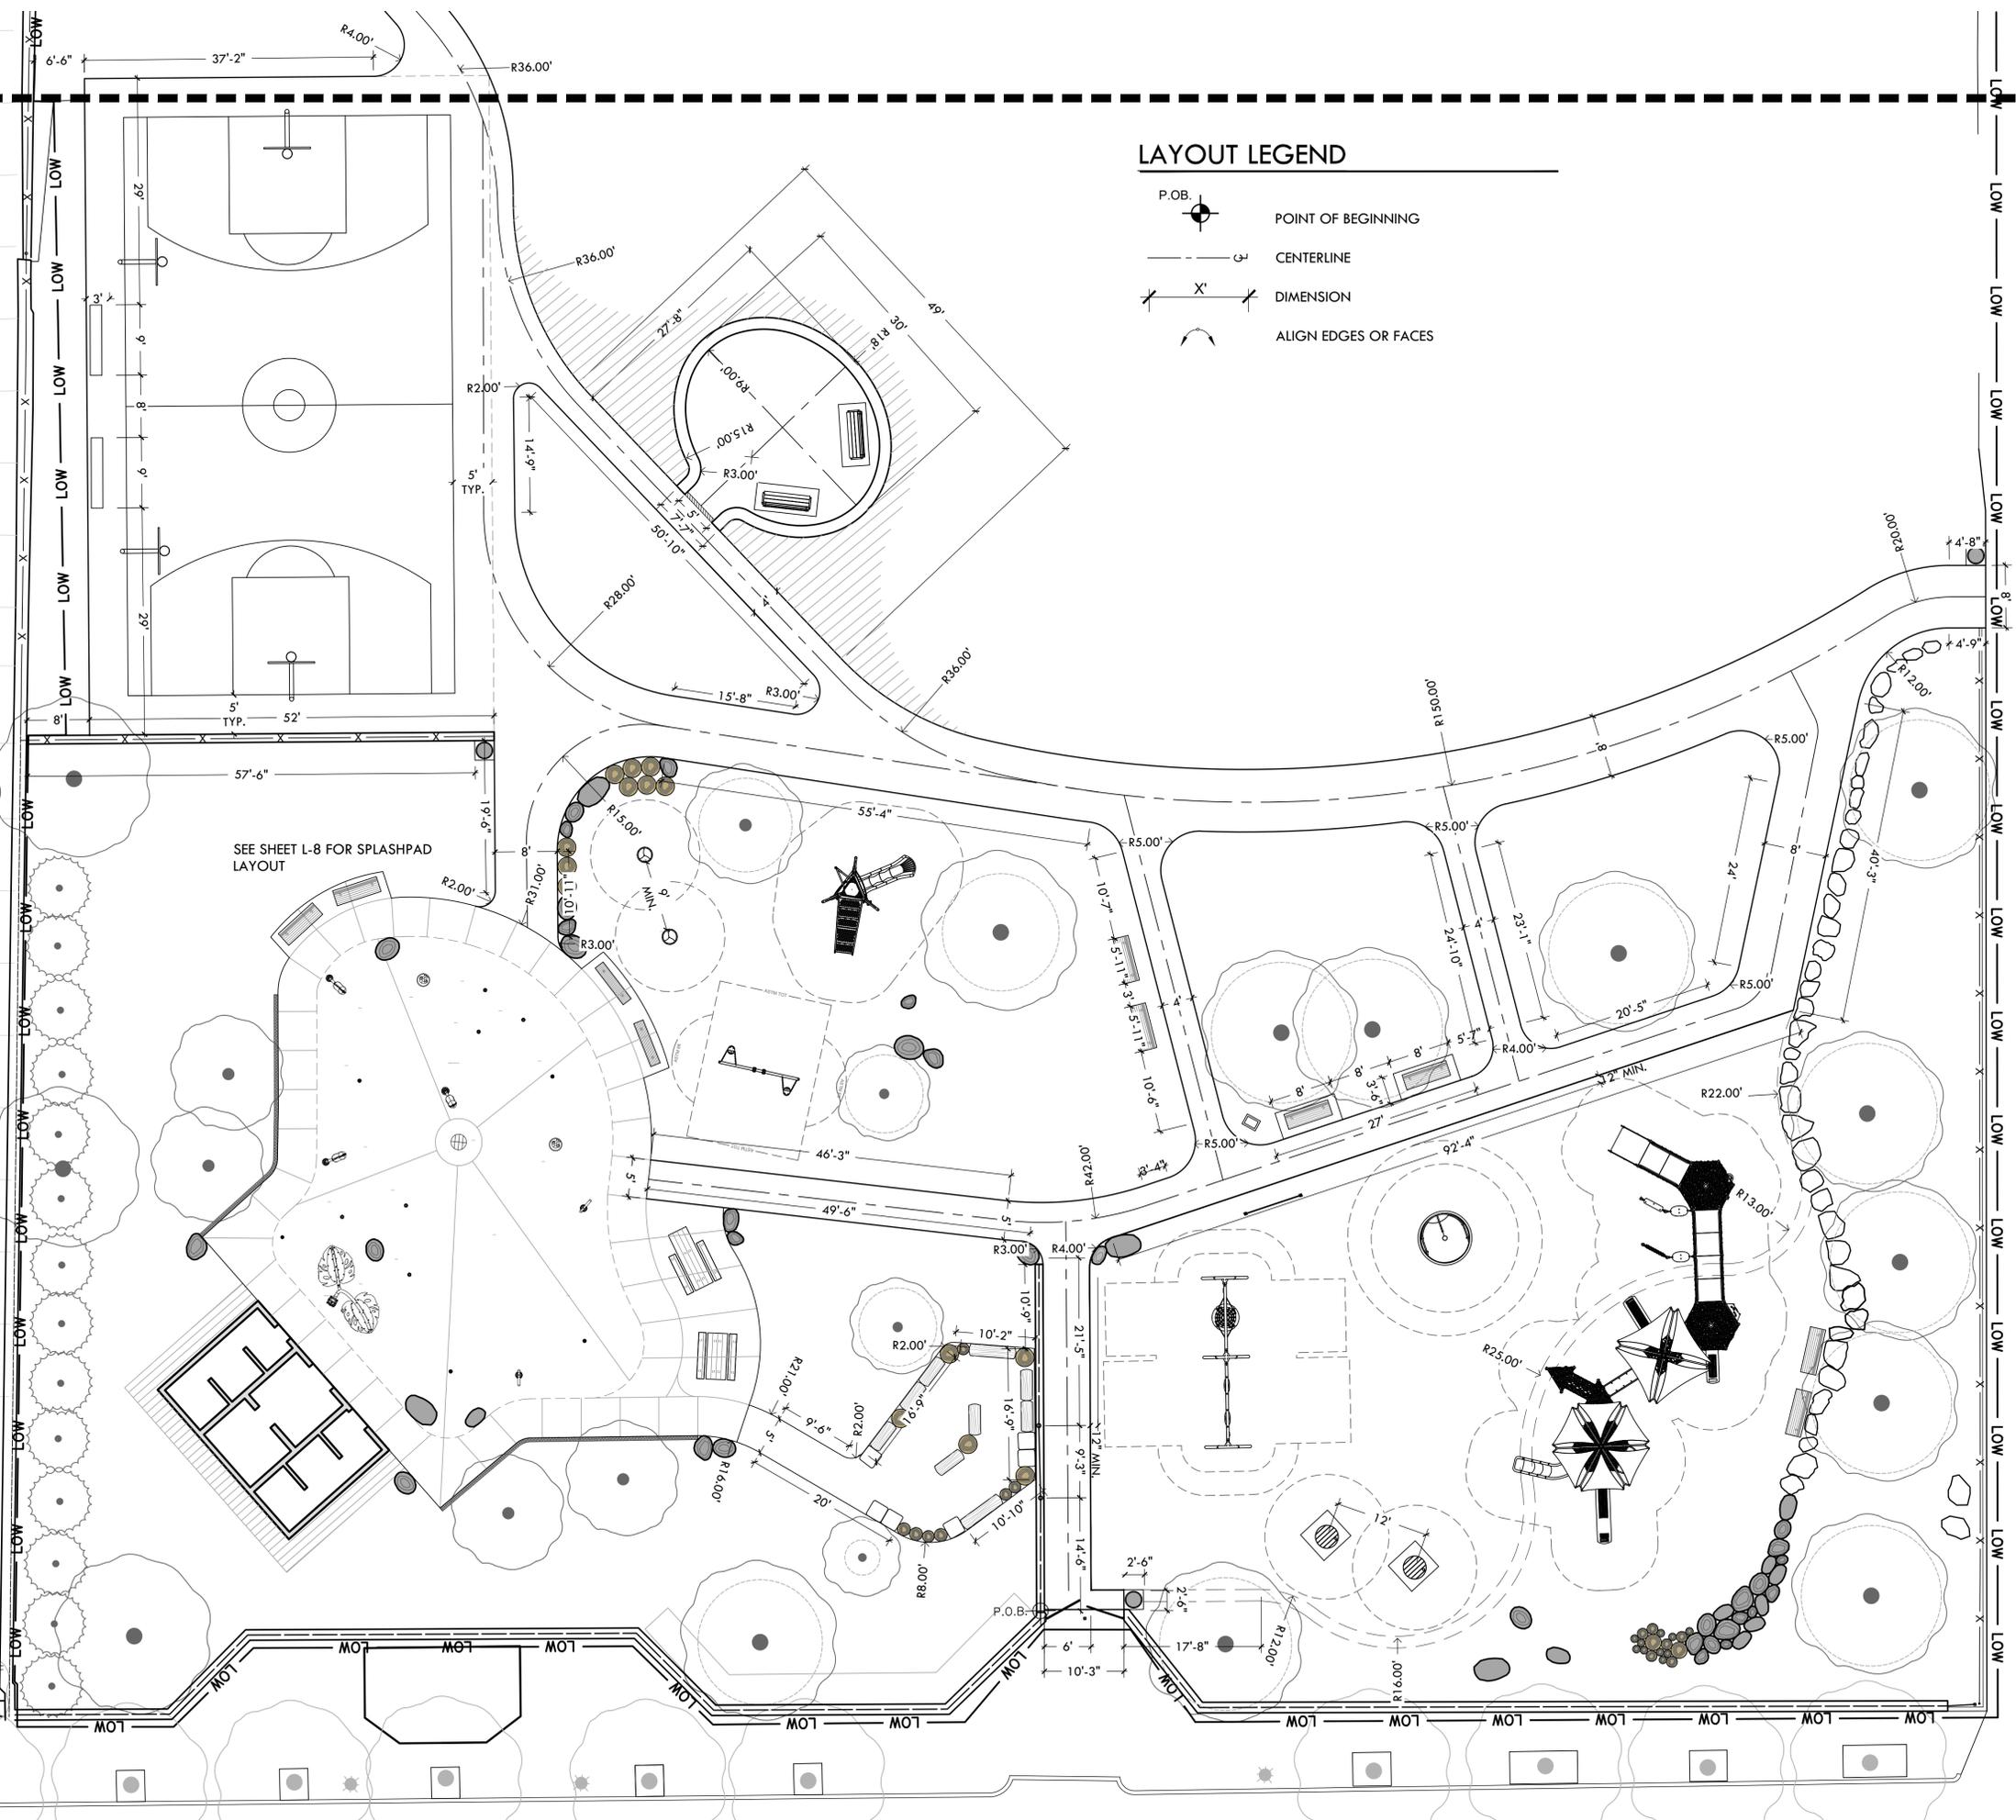

SEE SHEET L-8 FOR SPLASHPAD LAYOUT



PROVIDENCE
PARKS DEPARTMENT
 DALRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF
 PROVIDENCE PARKS
 DEPARTMENT, ALL RIGHTS
 RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
 REPRODUCED, STORED IN A RETRIEVAL
 SYSTEM OR TRANSMITTED IN ANY FORM OR
 BY ANY MEANS, ELECTRONIC,
 MECHANICAL, PHOTOCOPIING,
 RECORDING OR OTHERWISE WITHOUT THE
 PRIOR WRITTEN PERMISSION OF THE CITY
 OF PROVIDENCE PARKS DEPARTMENT. ANY
 MODIFICATIONS TO THIS DOCUMENT
 WITHOUT THE WRITTEN PERMISSION OF
 THE CITY OF PROVIDENCE PARKS
 DEPARTMENT SHALL RENDER IT INVALID
 AND UNUSABLE.



STAMP

PROJECT:
**Site Improvements at
 Cabral Park**
 515 Wickenden Street
 Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW





DRAWING INFO
 DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG

SHEET TITLE
Layout Plan


L-6.2

10 OF 23

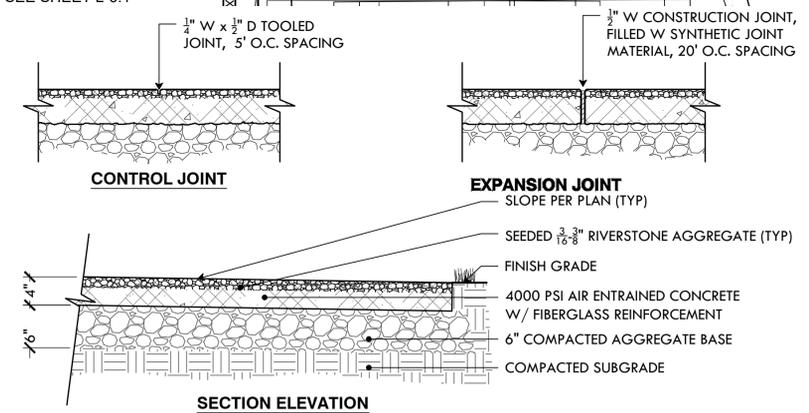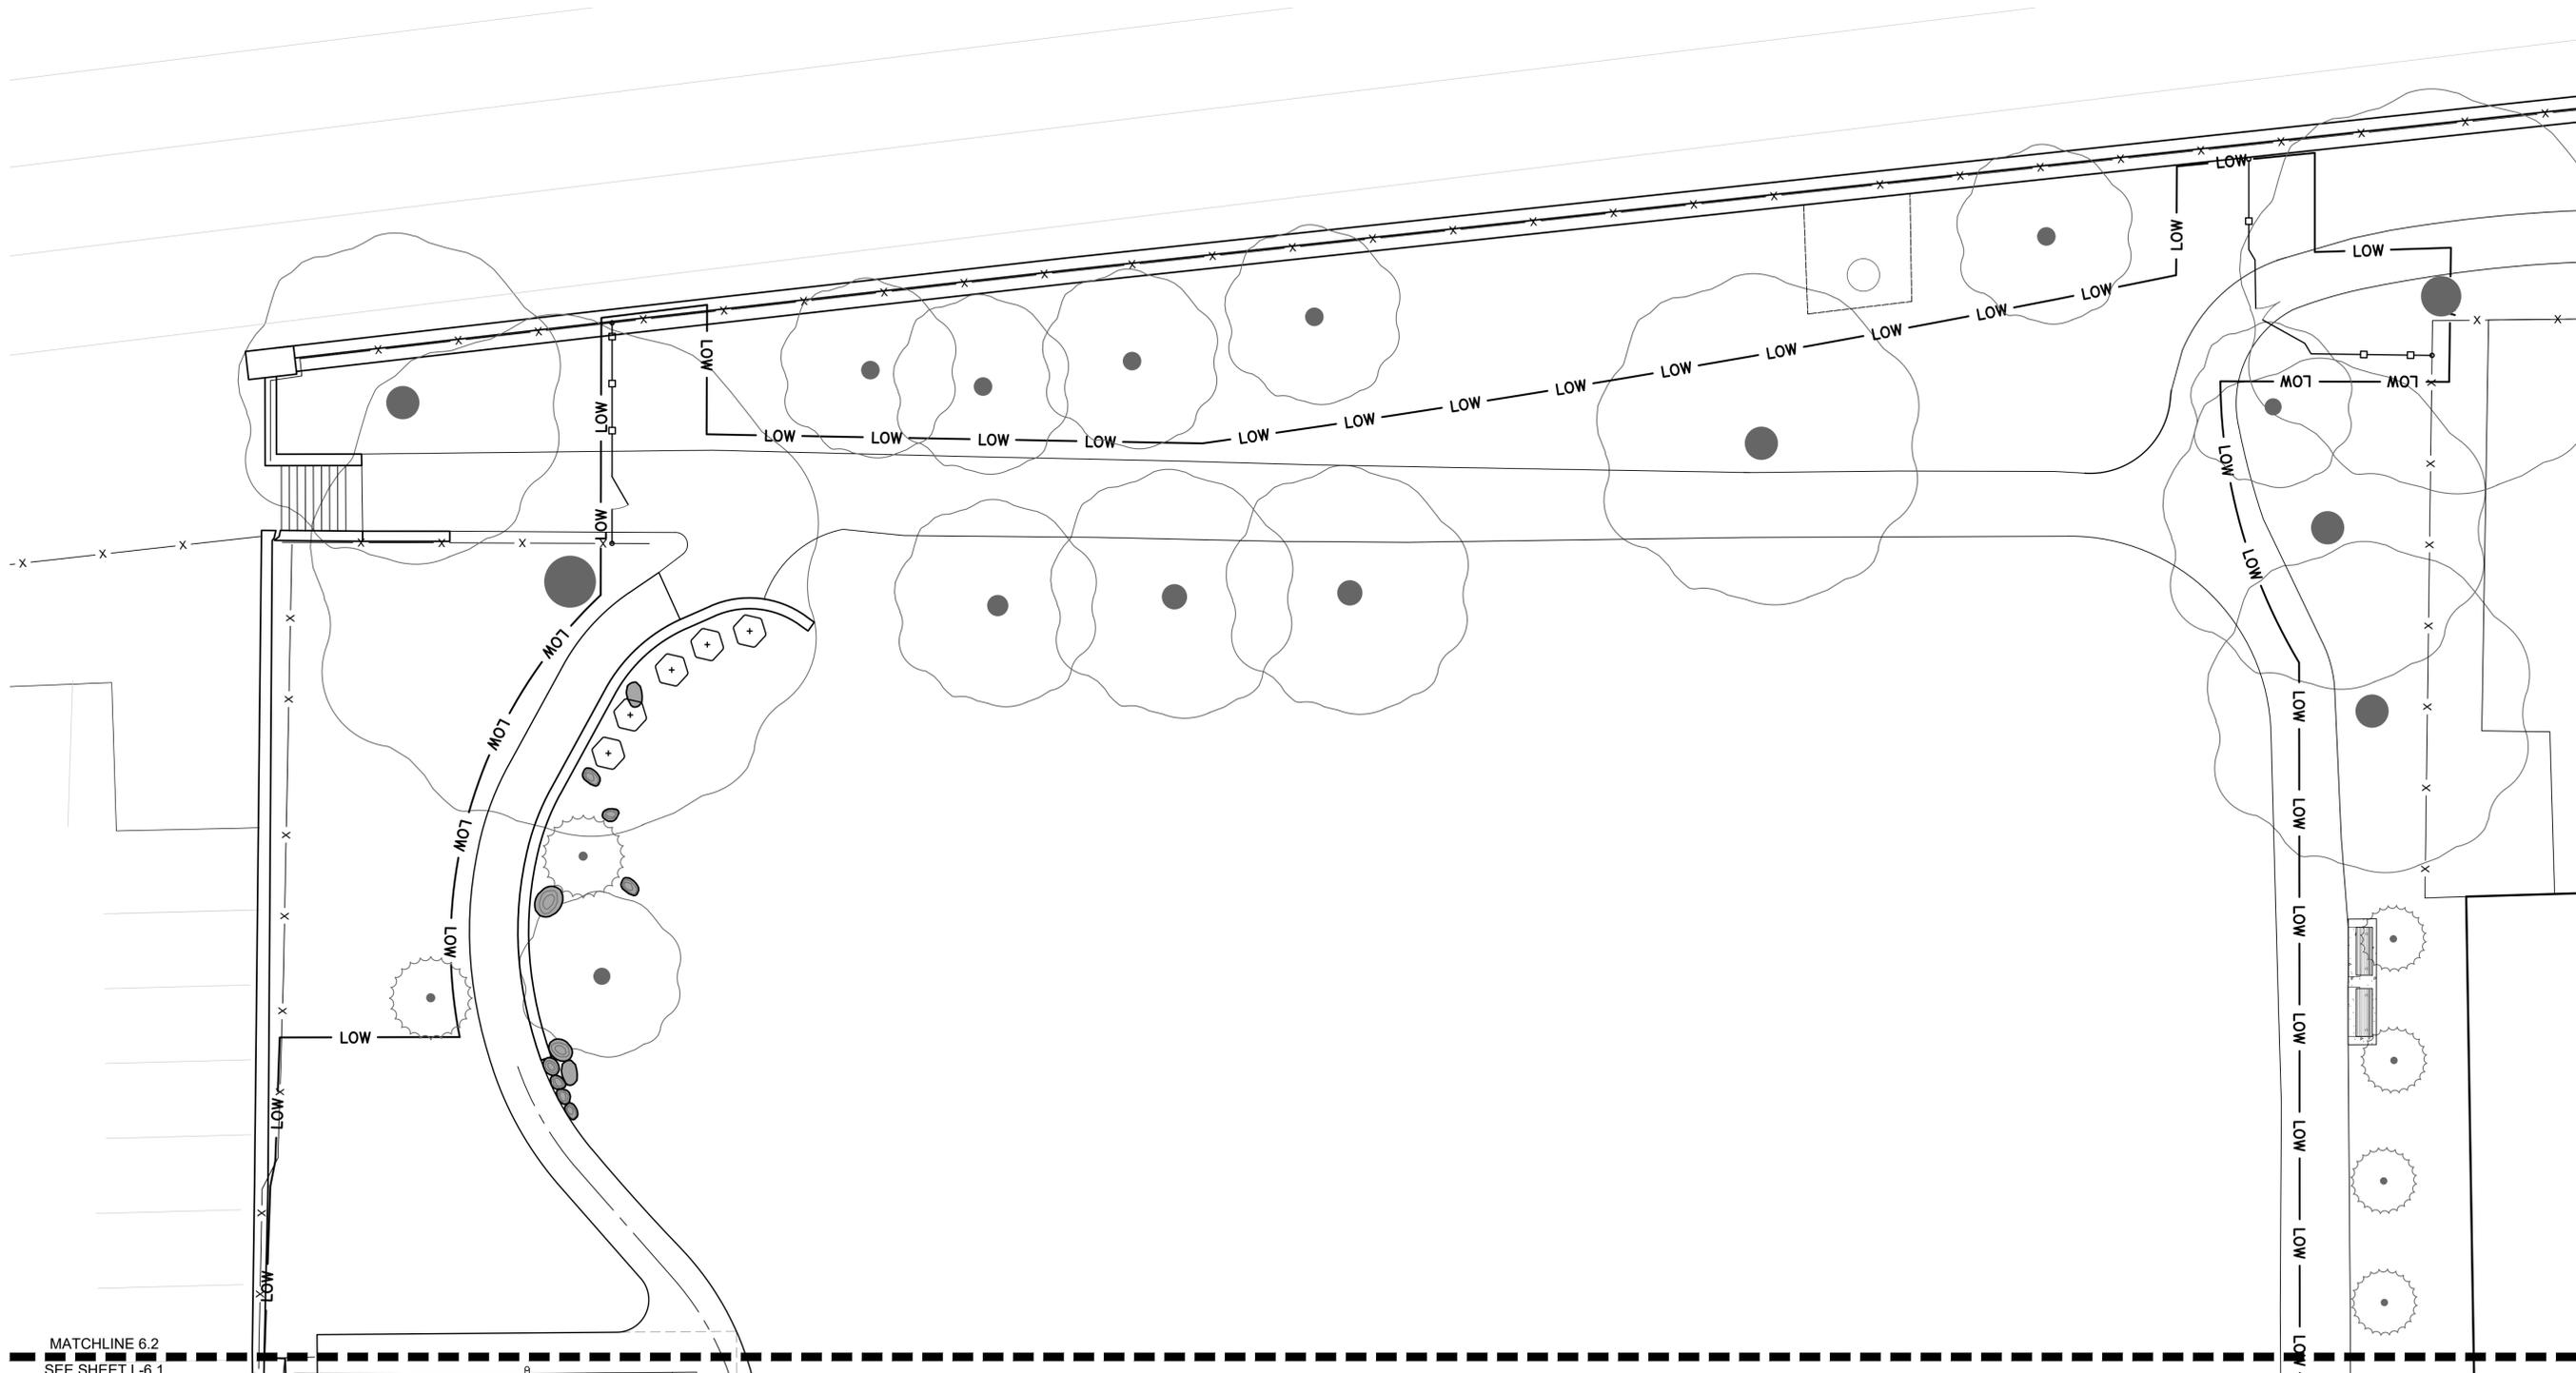

NOTES:
 1. PROVIDE 5LB SAMPLE OF AGGREGATE PRIOR TO CONSTRUCTION
 2. CONSTRUCT MIN 2'x5' MOCKUP FOR APPROVAL PRIOR TO CONSTRUCTION

1 EXPOSED AGGREGATE CONCRETE PAVING
 NOT TO SCALE

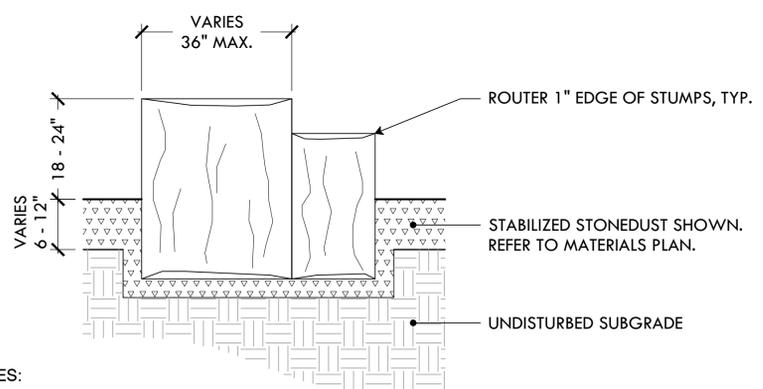

NOTES:
 1. HARDWOOD STUMPS TO BE STRIPED RED OAK, BLACK OAK, OR BLACK LOCUST SAND TOP WITH 120 GRIT, SMOOTH OUT ANY ROUGH EDGES AND PITCH TO DRAIN.
 2. TREAT ALL EXPOSED SURFACES WITH HOWARD SUNSHIELD CONDITIONER.

2 LOG EDGE IN EWF
 NOT TO SCALE

LAYOUT LEGEND

- P.O.B. POINT OF BEGINNING
- CENTERLINE
- DIMENSION
- ALIGN EDGES OR FACES

FILE: CABR.23.01-PLANS.dwg



**PROVIDENCE
PARKS DEPARTMENT**
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



**Providence
Parks**

COPYRIGHT (C) CITY OF
PROVIDENCE PARKS
DEPARTMENT, ALL RIGHTS
RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
REPRODUCED, STORED IN A RETRIEVAL
SYSTEM OR TRANSMITTED IN ANY FORM OR
BY ANY MEANS, ELECTRONIC,
MECHANICAL, PHOTOCOPYING,
RECORDING OR OTHERWISE WITHOUT THE
PRIOR WRITTEN PERMISSION OF THE CITY
OF PROVIDENCE PARKS DEPARTMENT. ANY
MODIFICATIONS TO THIS DOCUMENT
WITHOUT THE WRITTEN PERMISSION OF
THE CITY OF PROVIDENCE PARKS
DEPARTMENT SHALL RENDER IT INVALID
AND UNUSABLE.

STAMP

PROJECT:


**Site Improvements at
Cabral Park**

**515 Wickenden Street
Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE



SCALE: 1"=10'

DRAWING INFO


DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Planting Plan

L-7.2

12 OF 23

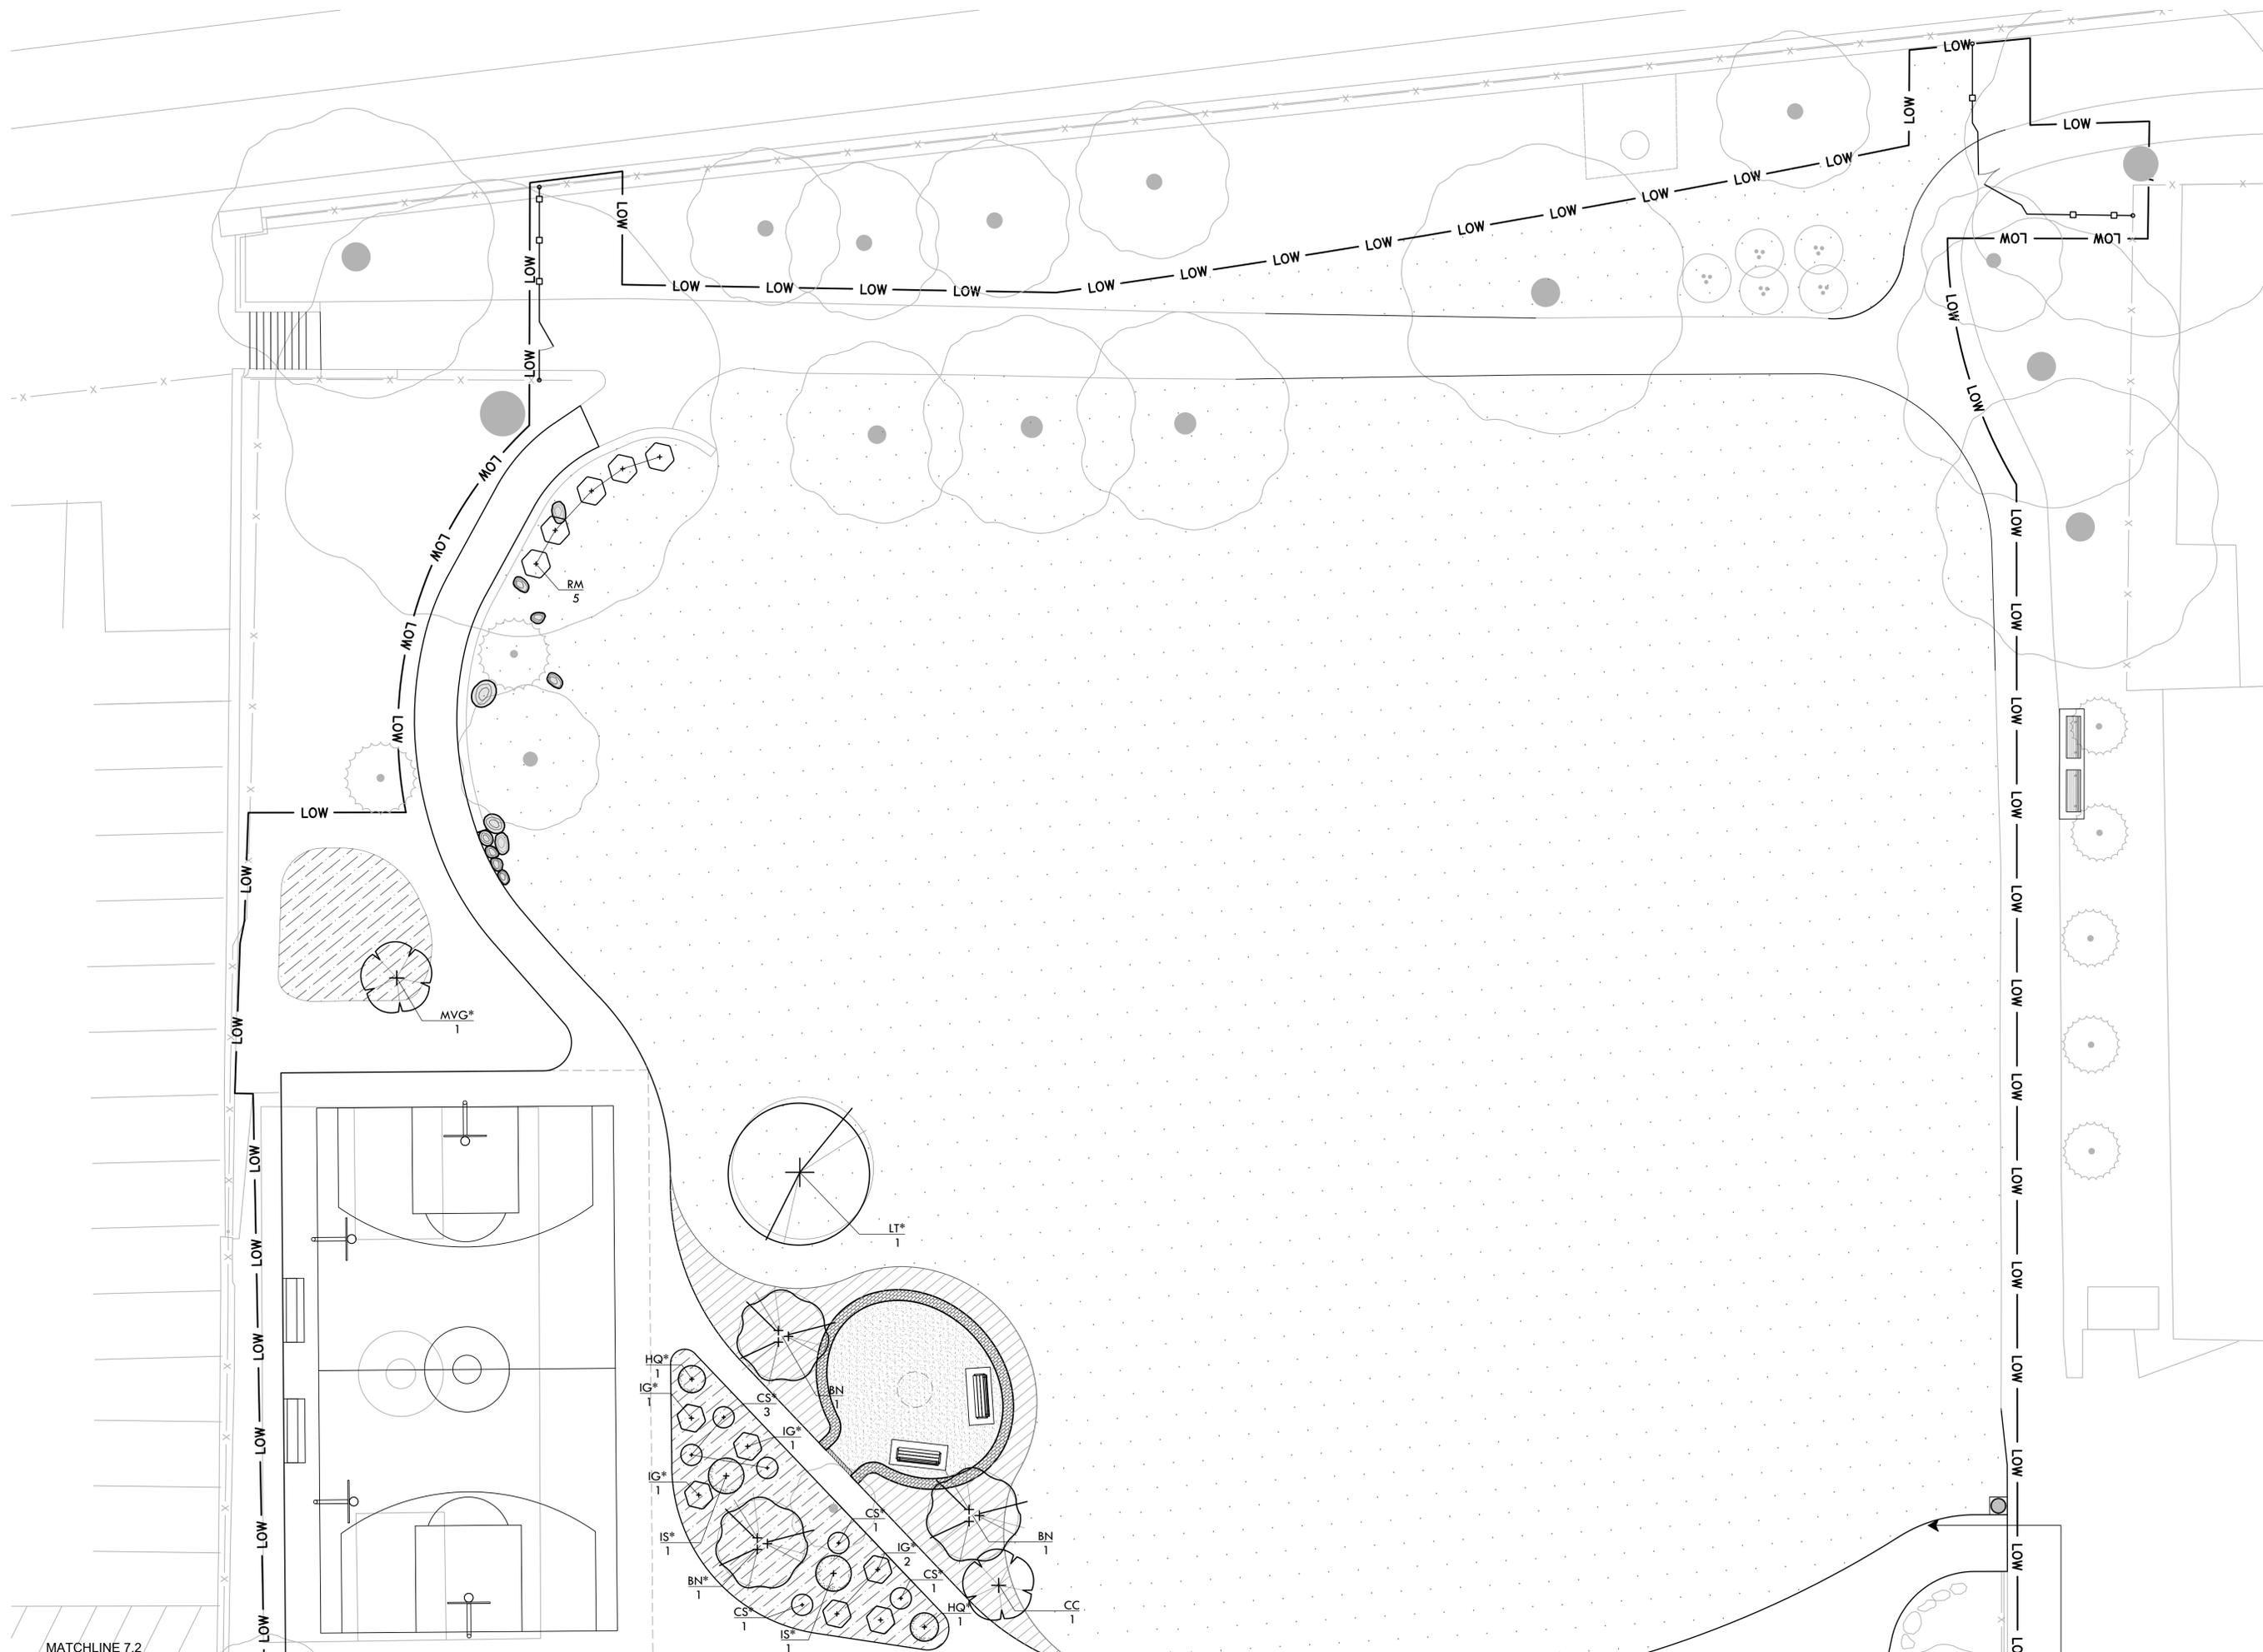


MATCHLINE 7.2
SEE SHEET L-7.1


FILE: CABR23.01-PLANS.dwg

LAYOUT LEGEND

- P.O.B. POINT OF BEGINNING
- CENTERLINE
- DIMENSION
- ALIGN EDGES OR FACES

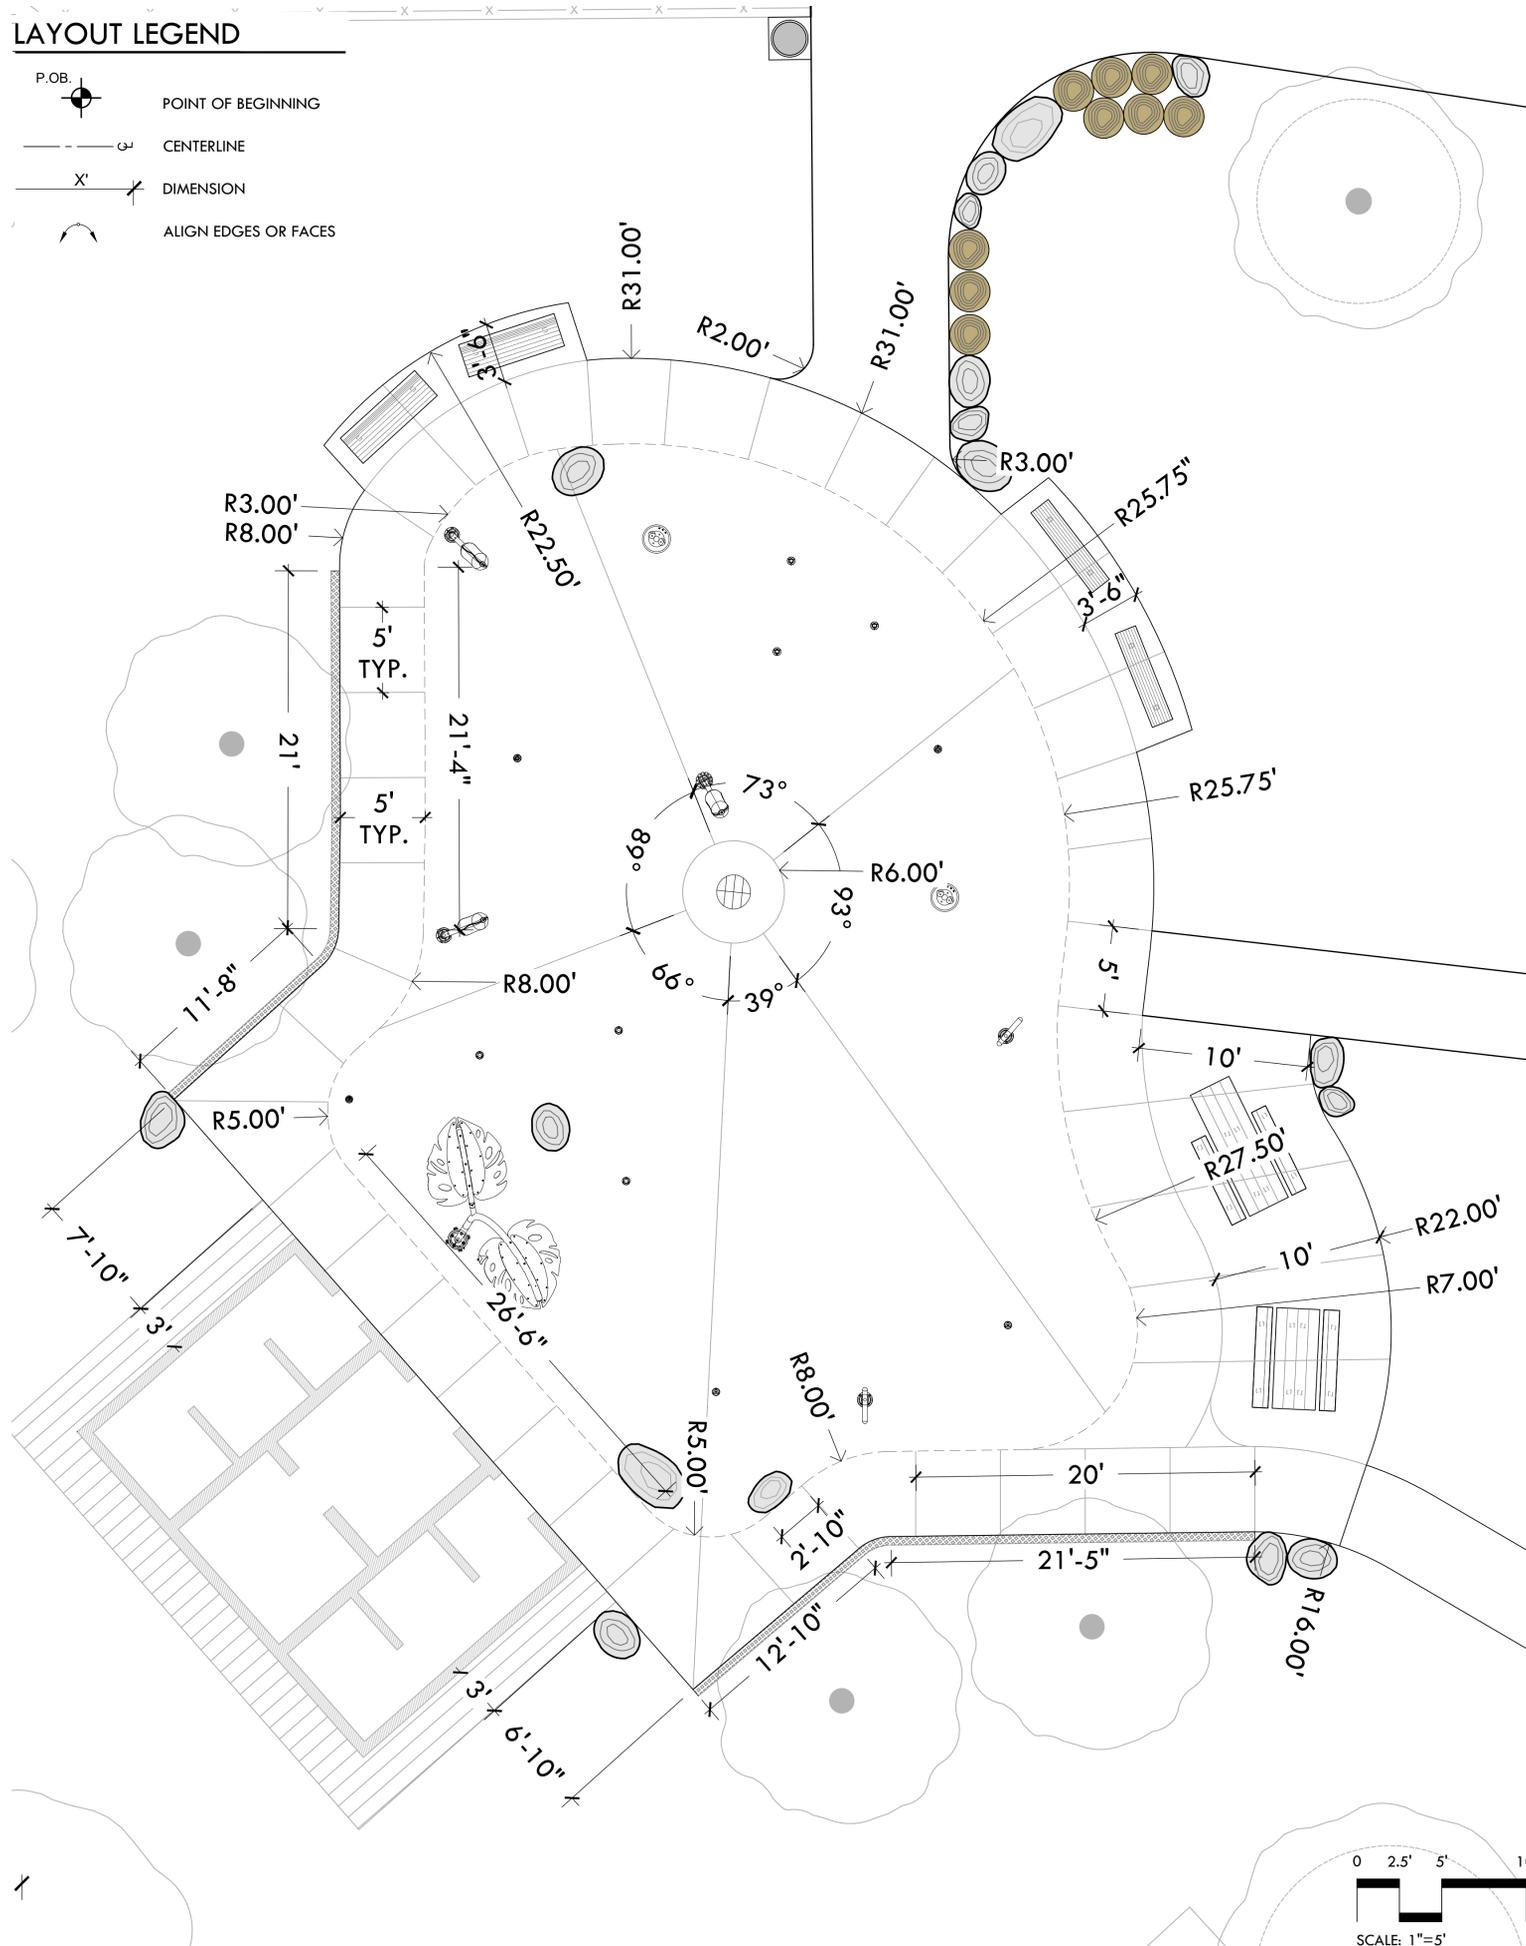

LAYOUT PLAN

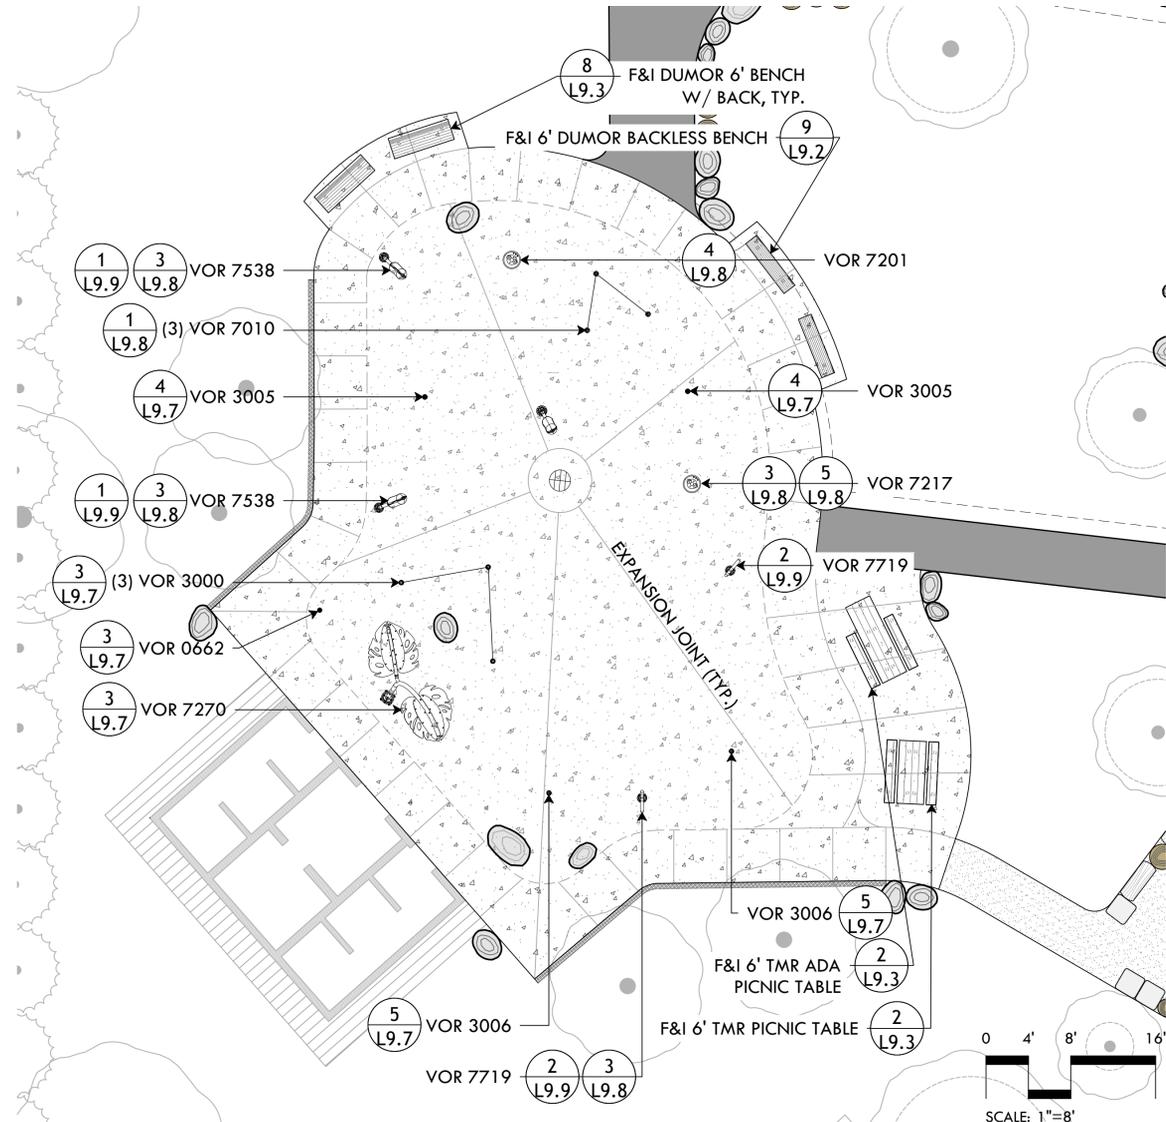

MATERIALS PLAN LEGEND

- 4'H CHAIN LINK (CL) MESH
- ROLL-DOWN CURB / HAUNCH
- 4'W BLACK VINYL CL GATE
- LIMITS OF FENCE/WALL WORK
- EX. BOULDERS TO REMAIN
- 3' ASPHALT PAVING
- 4' POURED CONCRETE
- EXPOSED AGGREGATE CONCRETE PAVING
- SALVAGED COBBLE PAVING EDGE
- STABILIZED STONEDUST PATH
- SYNLAWN SURFACING
- EWF MULCH (12" IN USE ZONES, 6" IN OTHER AREAS)
- FLUSH GRANITE CURB
- EXISTING CONCRETE CURB TO REMAIN
- 55 GAL TRASH RECEPTACLE, SURFACE MOUNT ON CONCRETE PAD
- ROUNDED, NATIVE BOULDERS (NEW & FROM STOCKPILE)
- DUMOR 6' BENCH W/ BACK, IN-GROUND MOUNT
- DUMOR 6' BACKLESS BENCH, IN-GROUND MOUNT
- VESTRE BENCH W/ HIGH BACK AND ARMRESTS
- BENCH ON 4" CONCRETE PAD
- 6' PICNIC TABLE AND ADA PICNIC TABLE TMR
- GRANITE BLOCK SEAT
- 4' L AND 6' LONG WOOD LOG BENCH
- LOG SEAT/STEPPERS, DIA. VARIES.



- CONNECT 2" SPLASHPAD PIPING FROM REAR TO FRONT ROOM
- F&I BOILER DRAIN VALVE BEFORE NEW VORTEX MANIFOLD
- LOCATE VORTEX CONTROLLER, PIPES AND VALVES ON THIS WALL
- F&I 3/4" CRUSHED STONE AT BASE OF NEW PIPING FLUSH WITH CONCRETE



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP


PROJECT:
Site Improvements at Cabral Park

515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW



SCALE

DRAWING INFO


DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Splash Pad Enlargement


L-8

FILE: CABR23.01-PLANS.dwg

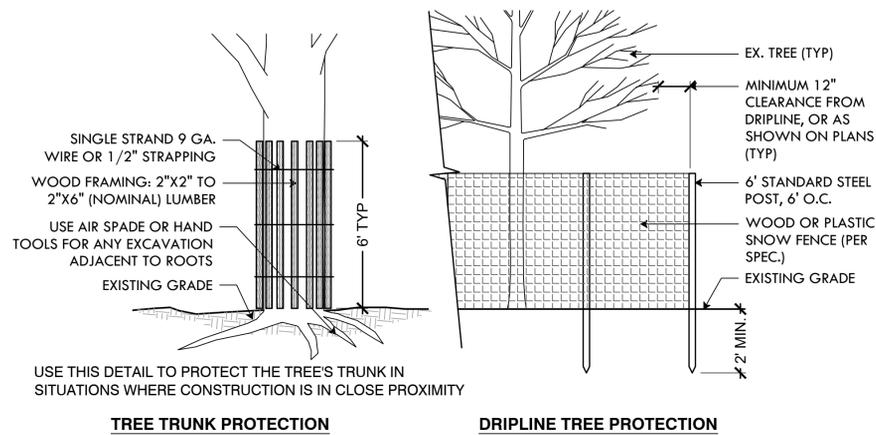

1 TREE PROTECTION FENCING PROVIDED BY OTHERS. MAINTAINED BY CONTRACTOR NOT TO SCALE

2 STRAW WATTLE NOT TO SCALE

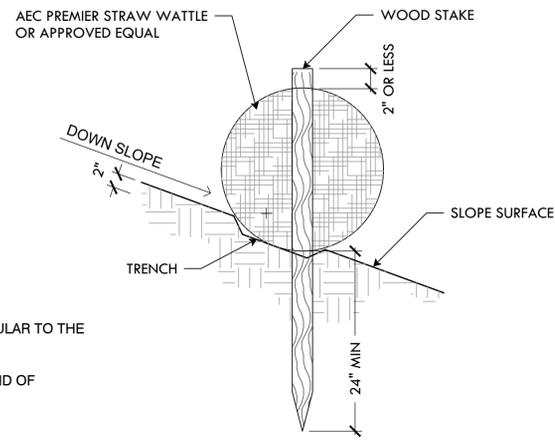



WATTLES ARE INSTALLED PERPENDICULAR TO THE SLOPE OR DIRECTION OF FLOW.

WOOD STAKE PLACED WITHIN 2' OF END OF WATTLE, THEN ANOTHER 2' AND THEN CONTINUOUSLY 4' O.C.


WHEN JOINING TWO WATTLES, TIGHTLY ABUT BOTH ENDS, TIE THE ENDS TOGETHER USING HEAVY TWINE OR PLASTIC LOCKING TIES.

LAST 2' OF WATTLES SHALL BE TURNED UPHILL.


3 ASPHALT ROLL DOWN CURB NOT TO SCALE

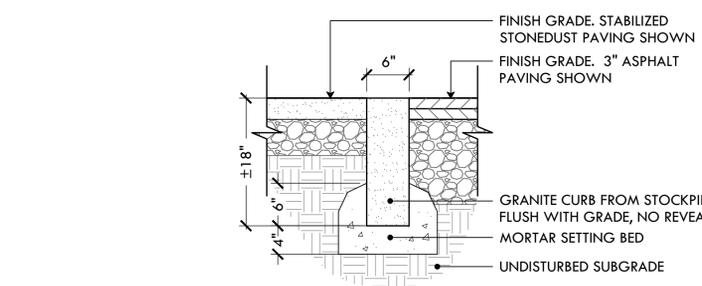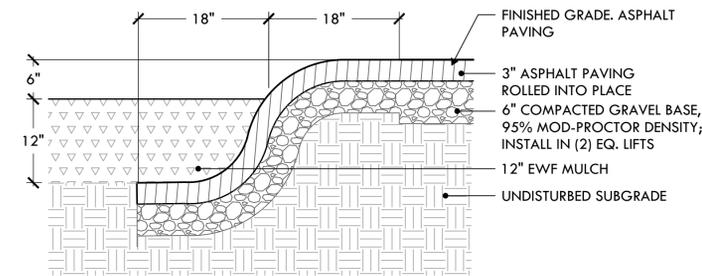


4 FLUSH GRANITE CURB NOT TO SCALE

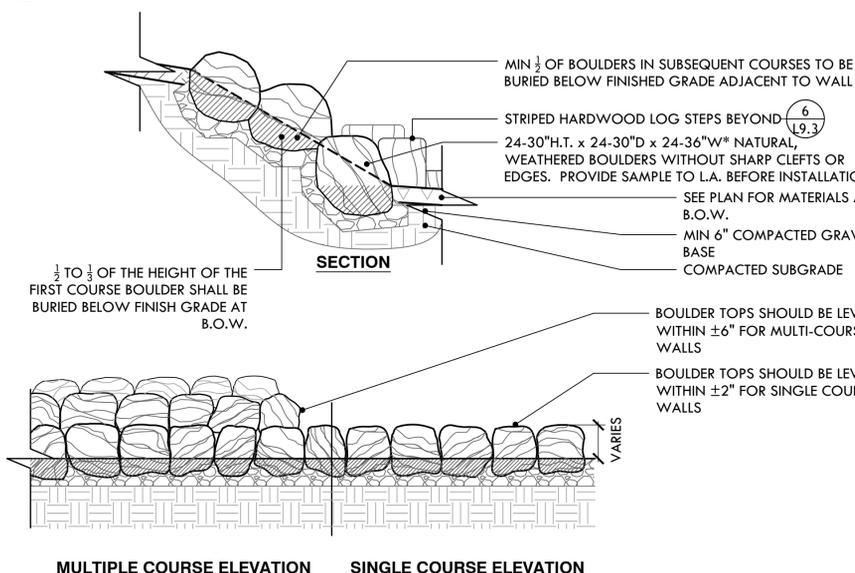

5 LOG & BOULDER SCRAMBLE NOT TO SCALE

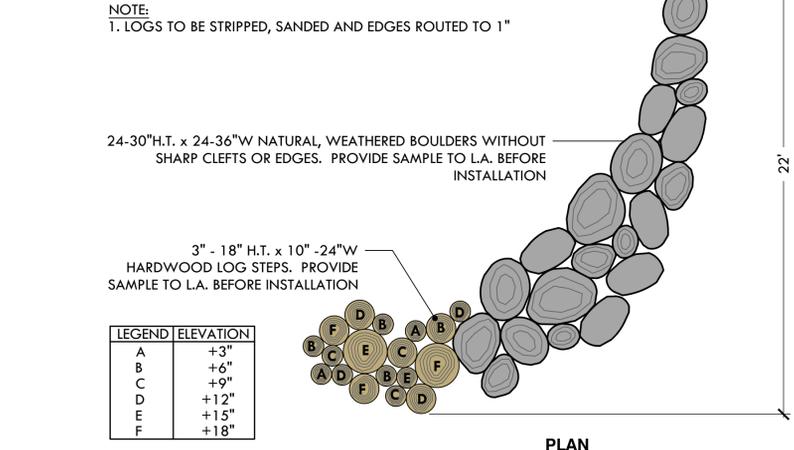


6 18" JUMBO COBBLE PAVING EDGE NOT TO SCALE

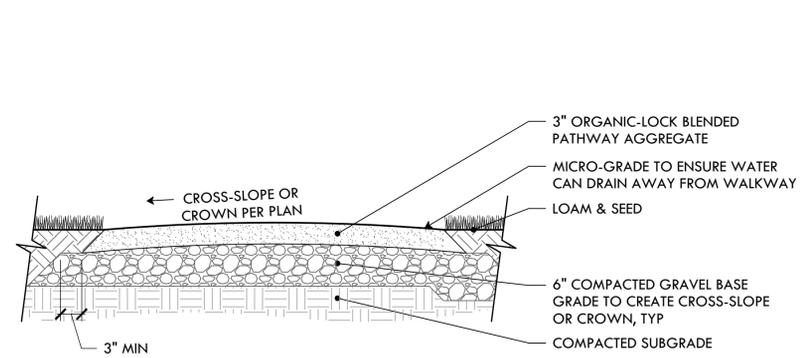

INSTALLATION NOTES:

- PRE-WET ORGANIC-LOCK AGGREGATE BLEND IS THE PREFERRED METHOD OF INSTALLATION, THIS ENSURES THAT ORGANIC-LOCK BINDER IS HOMOGENEOUSLY ACTIVATED BY WATER. IF PRE-WETTING IS NOT DONE AT THE QUARRY, THE USE OF A FRONT-LOADING TRACTOR AND A WATER SOURCE CAN PRE-WET ORGANIC-LOCK PATHWAY AGGREGATE ON THE JOB SITE. SLOWLY ADD WATER TO THE ORGANIC-LOCK PATHWAY AGGREGATE AND TURN IT OVER UNTIL ~10% MOISTURE CONTENT (24 GALLONS PER IMPERIAL TON) IS ACHIEVED.
- PRE-INSTALLATION CONFERENCE WITH VENDOR REQUIRED PRIOR TO INSTALLATION.


6 STABILIZED STONEDUST PAVING AT OUTDOOR CLASSROOM NOT TO SCALE

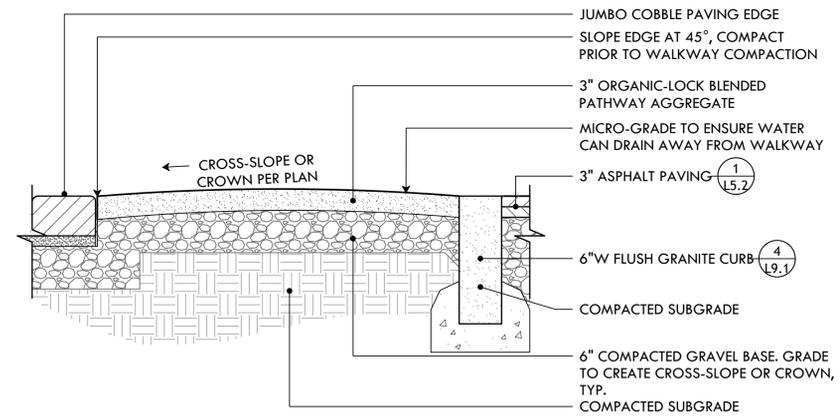


INSTALLATION NOTES:

- PRE-WET ORGANIC-LOCK AGGREGATE BLEND IS THE PREFERRED METHOD OF INSTALLATION, THIS ENSURES THAT ORGANIC-LOCK BINDER IS HOMOGENEOUSLY ACTIVATED BY WATER. IF PRE-WETTING IS NOT DONE AT THE QUARRY, THE USE OF A FRONT-LOADING TRACTOR AND A WATER SOURCE CAN PRE-WET ORGANIC-LOCK PATHWAY AGGREGATE ON THE JOB SITE. SLOWLY ADD WATER TO THE ORGANIC-LOCK PATHWAY AGGREGATE AND TURN IT OVER UNTIL ~10% MOISTURE CONTENT (24 GALLONS PER IMPERIAL TON) IS ACHIEVED.

7 STABILIZED STONEDUST PAVING W/ JUMBO COBBLE PAVING EDGE NOT TO SCALE

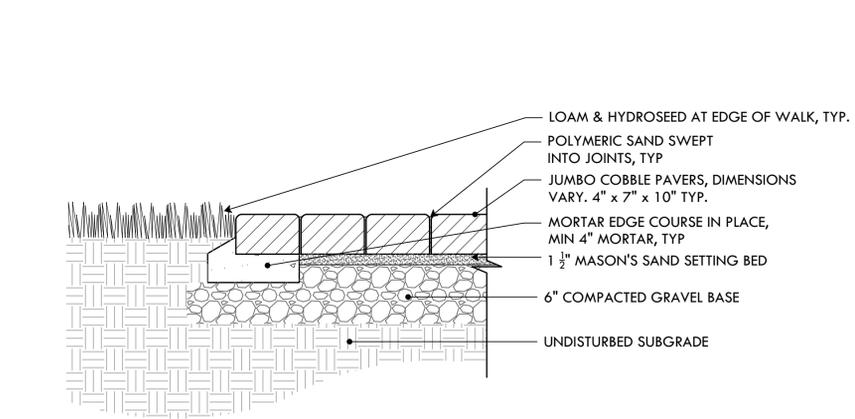

8 18" JUMBO COBBLE PAVING EDGE NOT TO SCALE



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
Site Improvements at Cabral Park
515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE
Construction Details



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
Site Improvements at Cabral Park
515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-


NORTH ARROW

SCALE


DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE
Construction Details


L-9.2
15 OF 23

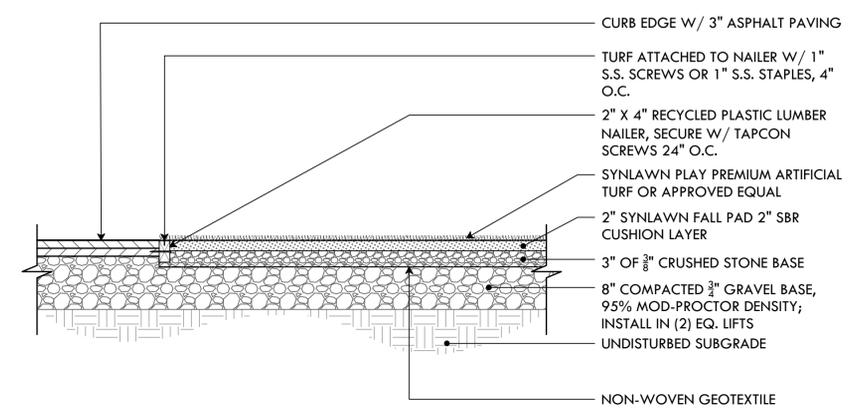


1 SYNLAWN PLAYGROUND SURFACING
NOT TO SCALE

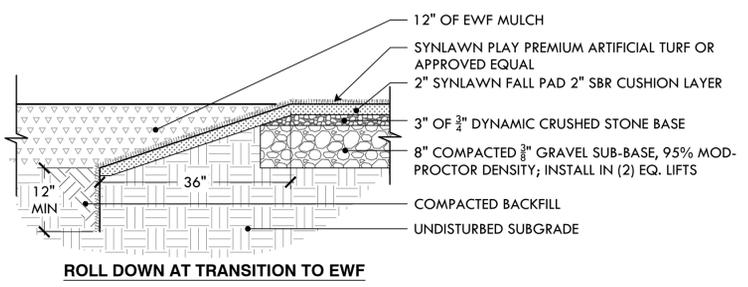

2 SYNLAWN ROLL DOWN EDGE
NOT TO SCALE

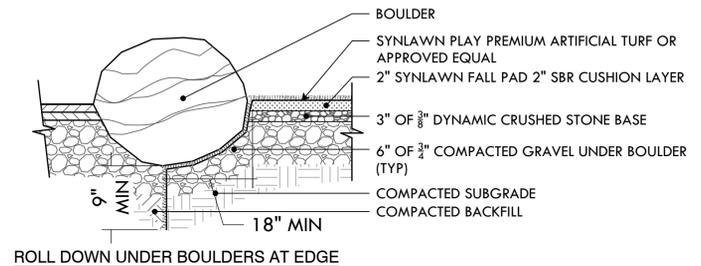


3 BOULDERS IN SYNLAWN
NOT TO SCALE

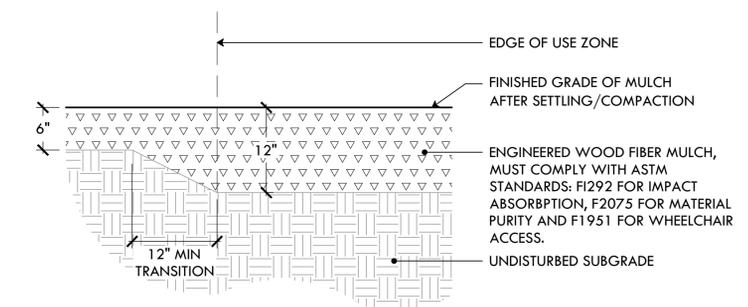


NOTE:
INSTALL 12" MIN DEPTH OF MULCH IN EQUIPMENT USE ZONE, 6" MIN DEPTH IN ALL OTHER AREAS.


4 EWF PLAYGROUND SURFACING
NOT TO SCALE

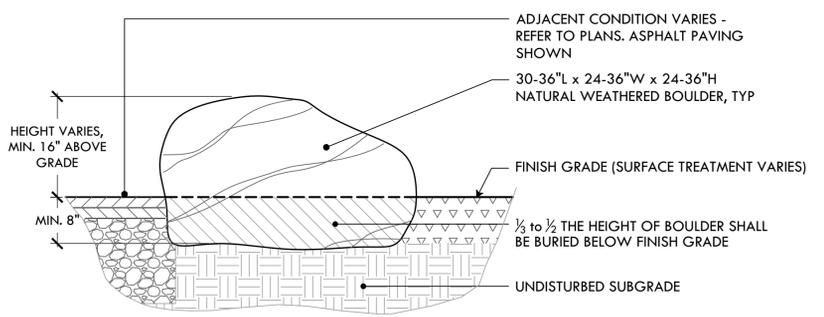


5 BOULDER IN EWF
NOT TO SCALE

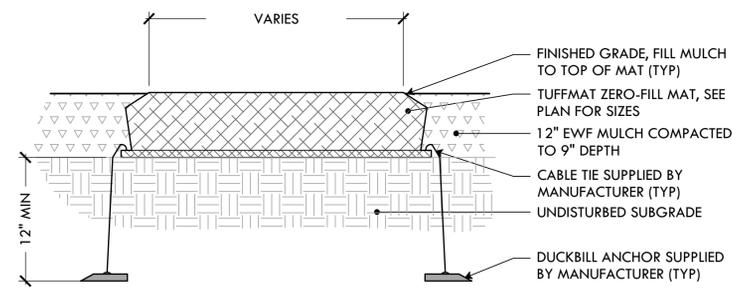

6 APS SWING WEAR MAT
NOT TO SCALE

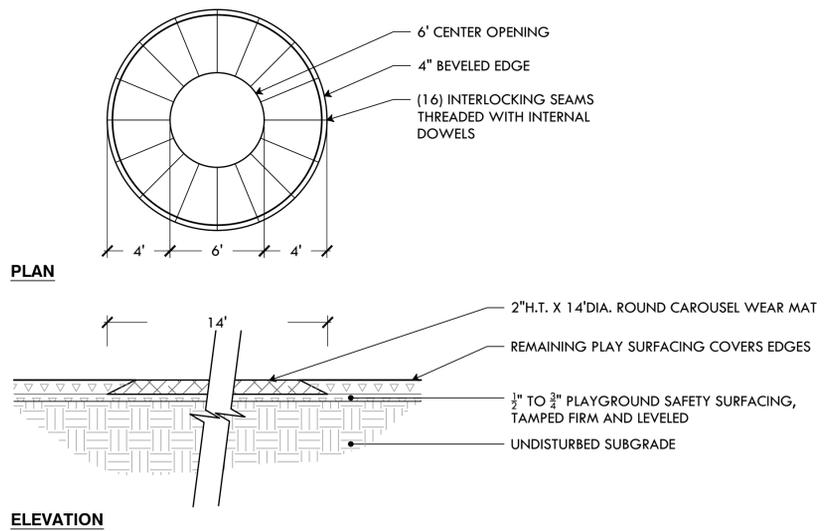


7 APS CAROUSEL WEAR MAT
NOT TO SCALE

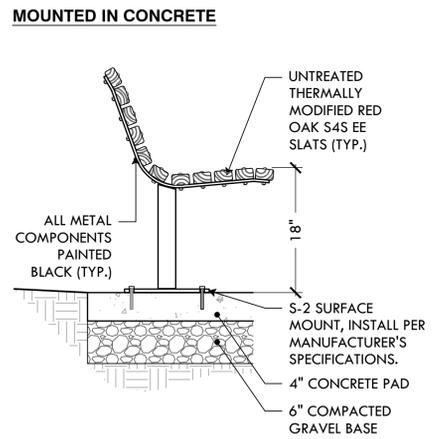


NOTES:
1. SEE PLAN FOR PLACEMENT OF BACKED AND BACKLESS BENCH MODELS.

8 6' DUMOR BENCH TMR
NOT TO SCALE

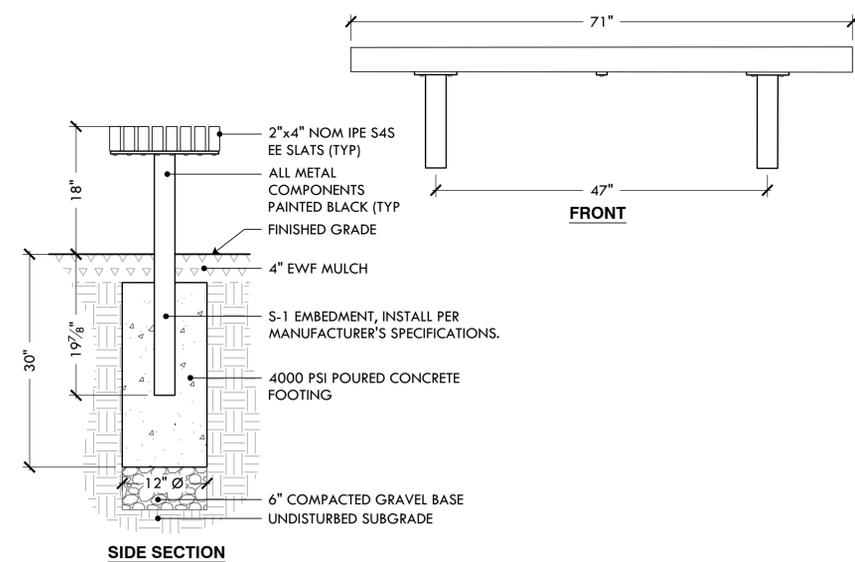


9 6' DUMOR BACKLESS BENCH
NOT TO SCALE


FILE: CABR23.01-PLANS.dwg

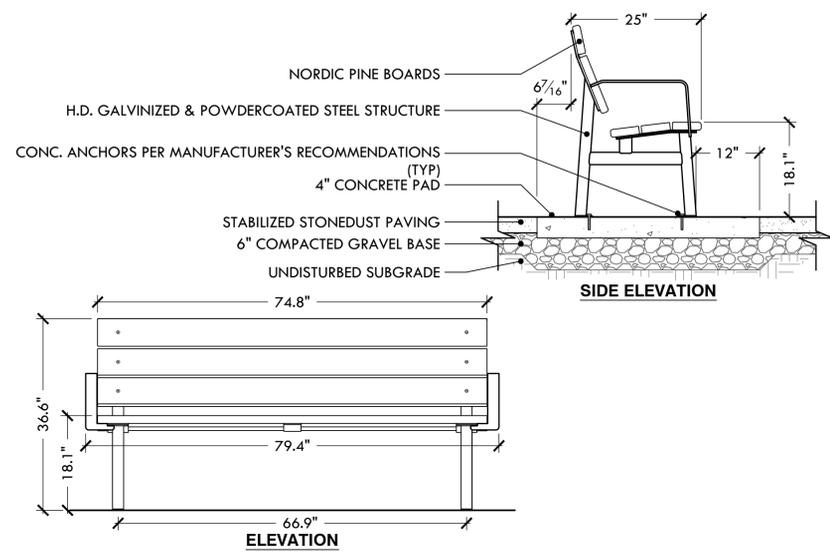


1 VESTRE JUNE BENCH W/ HIGH BACK AND ARMRESTS
NOT TO SCALE

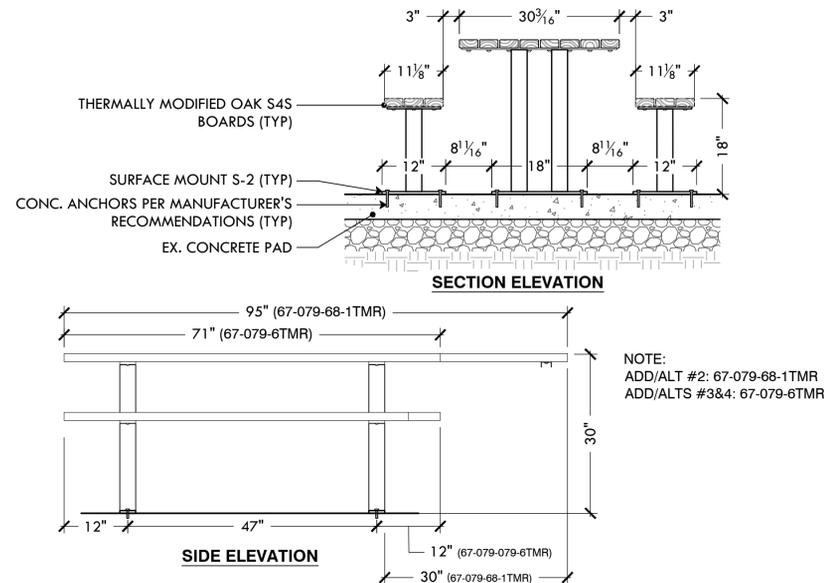

2 6' DUMOR PICNIC TABLE AND ADA PICNIC TABLE TMR
NOT TO SCALE

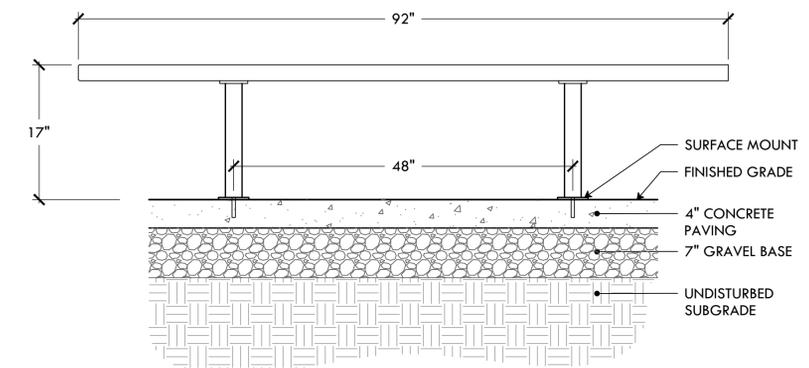


3 LSI TENDERTUFF BENCH - #141683F
NOT TO SCALE

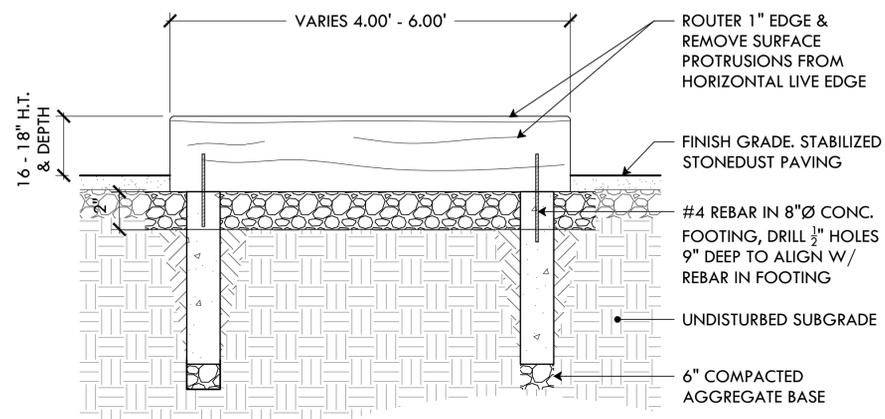


- NOTES:
- LOGS TO BE STRIPED RED OAK, BLACK OAK, OR BLACK LOCUST
 - SMOOTH CUT WOOD, PITCH TO DRAIN
 - SAND TOP WITH 120 GRIT FOR SURFACING
 - TREAT ALL EXPOSED SURFACES WITH HOWARD SUNSHIELD CONDITIONER

4 LOG BENCH SEATING
NOT TO SCALE

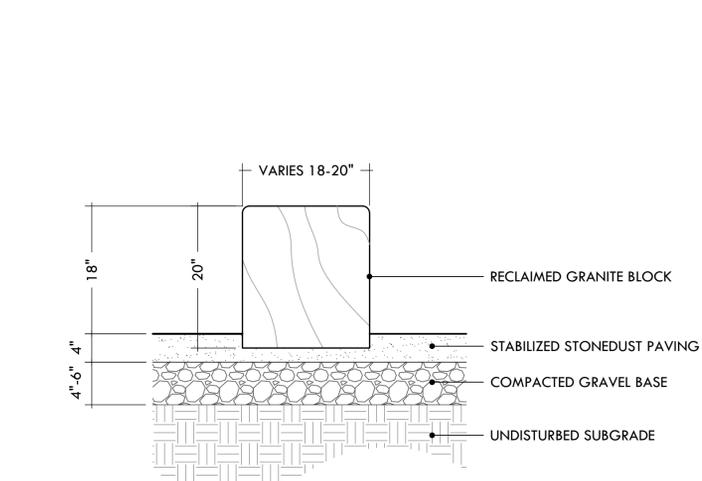


5 GRANITE BLOCK SEAT
NOT TO SCALE

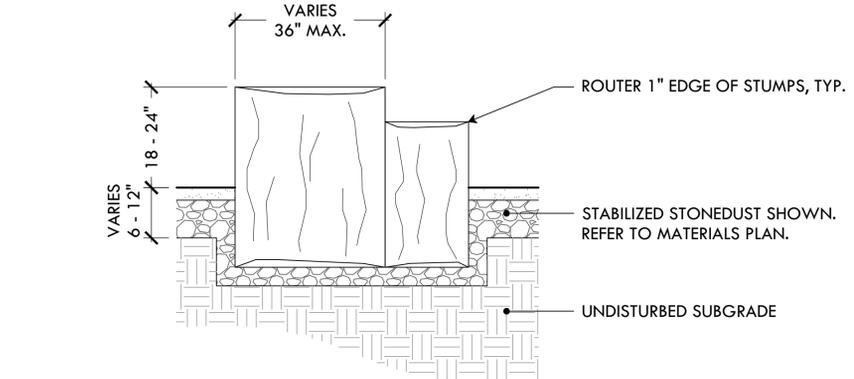


- NOTES:
- HARDWOOD STUMPS TO BE STRIPED RED OAK, BLACK OAK, OR BLACK LOCUST SAND TOP WITH 120 GRIT, SMOOTH OUT ANY ROUGH EDGES AND PITCH TO DRAIN.
 - TREAT ALL EXPOSED SURFACES WITH HOWARD SUNSHIELD CONDITIONER.

6 LOG STUMP SEATING AT OUTDOOR CLASSROOM
NOT TO SCALE

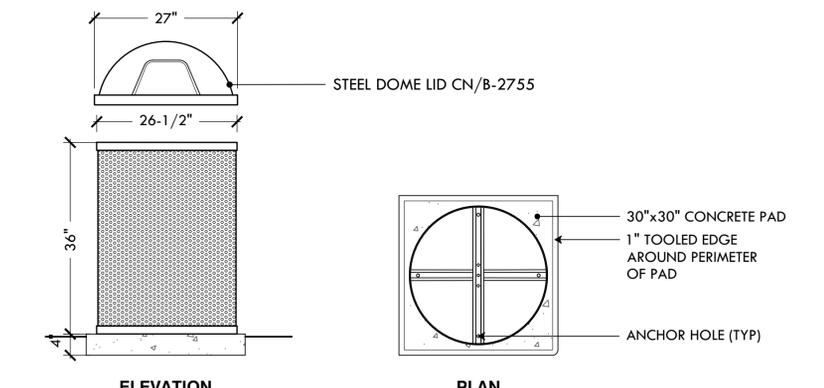


- NOTES:
- SEE DETAIL 8/L-10 FOR CONCRETE PAD.
 - UNIT SHOULD BE SECURED TO CONCRETE PAD USING THE FOUR (4) ANCHOR HOLES.
 - 55 GAL. ROUND PERFORATED STEEL TRASH RECEPTACLE. COLOR: BLACK, MATERIAL: STEEL.
 - 27\"/>

7 PILOT ROCK 55 GALLON TRASH RECEPTACLE WITH STEEL DOME LID
NOT TO SCALE

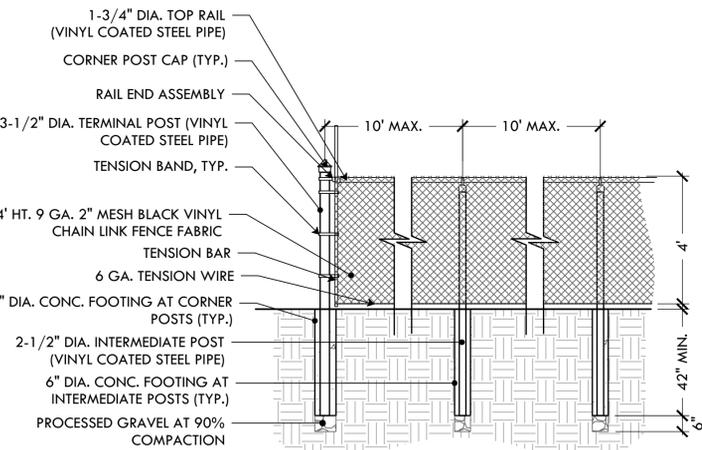


- NOTES:
- FENCING TO BE TIED TO TOP RAILS & LINE POSTS W/ 9GA. WIRE SPACED AT 12\"/>

8 BLACK VINYL CHAIN LINK FENCE
NOT TO SCALE

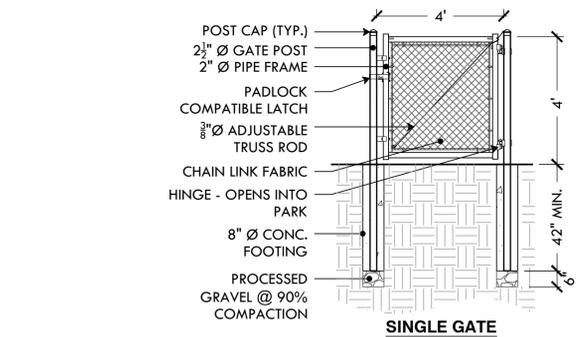

- NOTES:
- FENCING TO BE TIED TO TOP RAILS & LINE POSTS W/ 9GA. WIRE SPACED AT 12\"/>

9 4' H.T. BLACK VINYL CHAIN LINK GATE
NOT TO SCALE



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.
NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
Site Improvements at Cabral Park
515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE
Construction Details



PROVIDENCE
PARKS DEPARTMENT
 DALRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF
 PROVIDENCE PARKS
 DEPARTMENT, ALL RIGHTS
 RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
 REPRODUCED, STORED IN A RETRIEVAL
 SYSTEM OR TRANSMITTED IN ANY FORM OR
 BY ANY MEANS, ELECTRONIC,
 MECHANICAL, PHOTOCOPIING,
 RECORDING OR OTHERWISE WITHOUT THE
 PRIOR WRITTEN PERMISSION OF THE CITY OF
 PROVIDENCE PARKS DEPARTMENT. ANY
 MODIFICATIONS TO THIS DOCUMENT
 WITHOUT THE WRITTEN PERMISSION OF
 THE CITY OF PROVIDENCE PARKS
 DEPARTMENT SHALL RENDER IT INVALID
 AND UNUSABLE.

STAMP

PROJECT:
 Site Improvements at
 Cabral Park
 515 Wickenden Street
 Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-


NORTH ARROW

SCALE

DRAWING INFO
 DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG


SHEET TITLE
 Construction
 Details

L-9.4
 17 OF 23

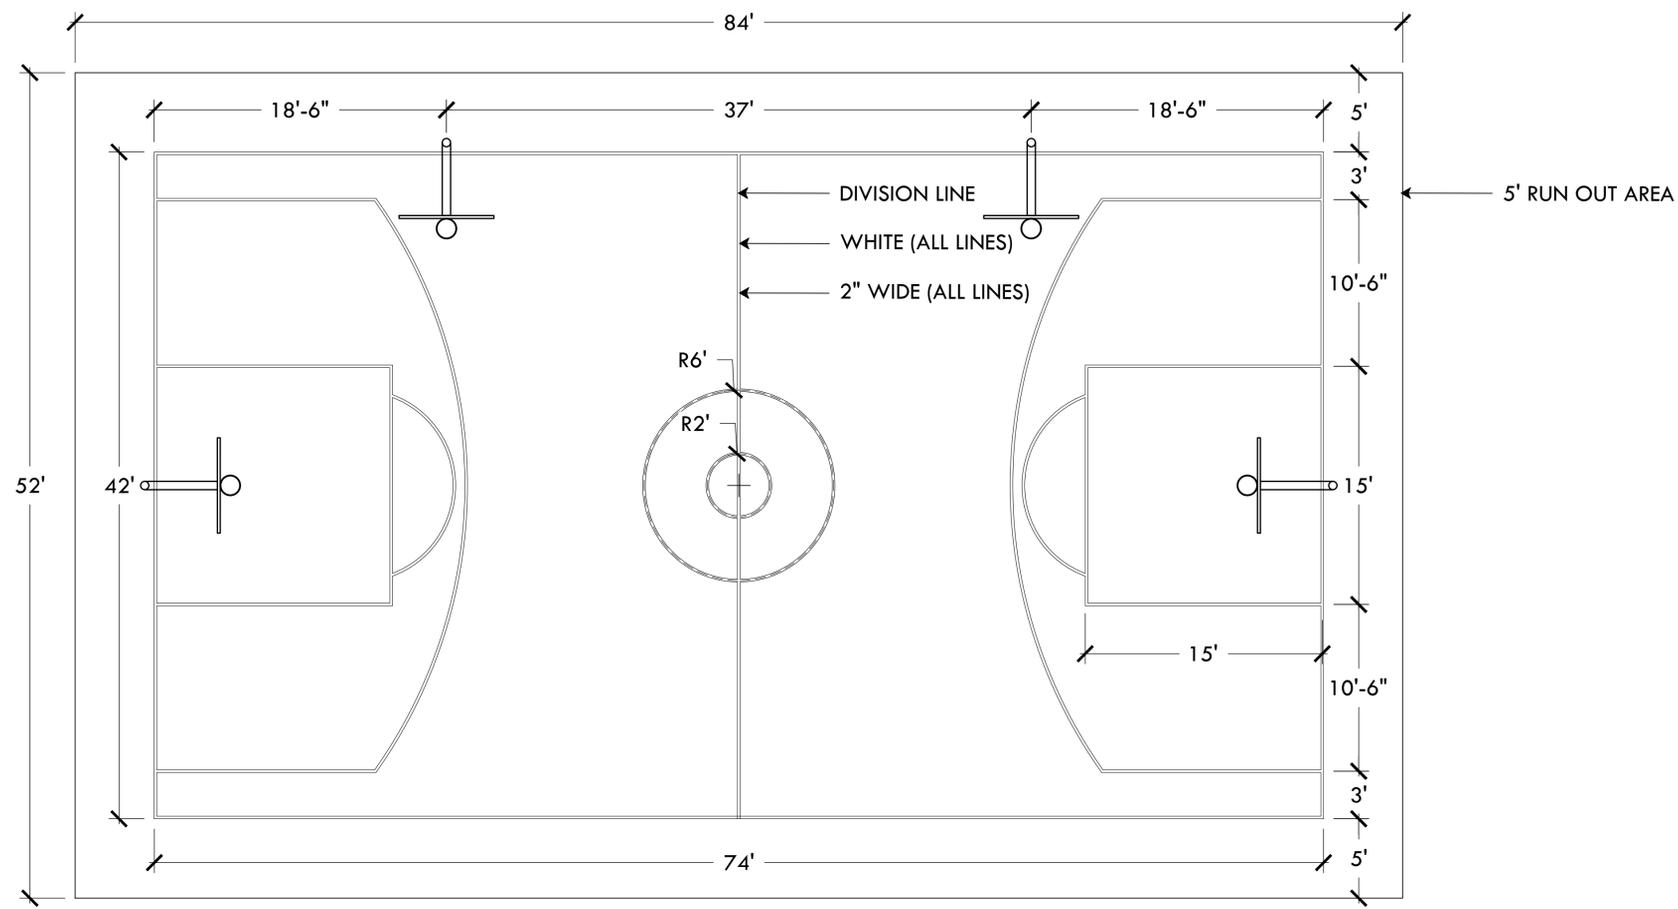


NOTES:
 1. ALL STRIPING TO BE WHITE ACRYLIC PER SPECIFICATIONS.

1 MIDDLE SCHOOL BASKETBALL COURT LAYOUT
 NOT TO SCALE

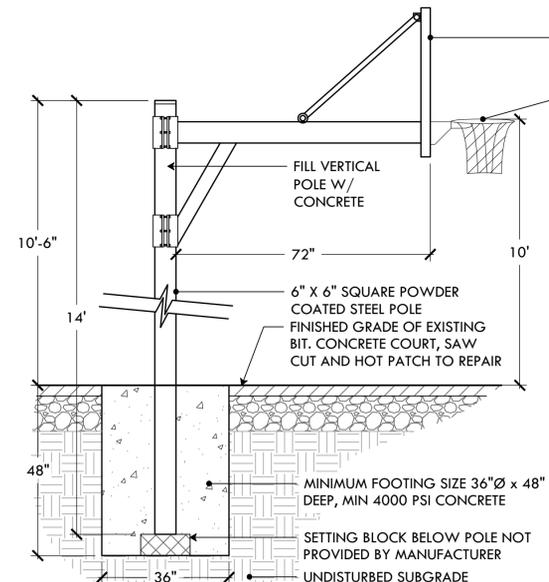


- NOTES:**
- 2-3/8" X 3" SAFETY BOLTS BEHIND THE RIM THAT ATTACH THE BACKBOARD TO THE POLE WHICH ALLOWS FOR THE RIM TO BE REPLACED WITHOUT THE BACKBOARD COMING DOWN
 - 72" EXTENSION FOR SAFE PLAY
 - DOUBLE STEEL HAT CLAMP WHERE ARM ATTACHES TO POLE ARM ATTACHES TO THE POLE WITH 12-1/2" STAINLESS STEEL BOLTS
 - DIRECT BURIAL POLE SYSTEM
 - MINIMUM POLE HEIGHT ABOVE FINISH GRADE IS 10'-6"
 - STANDARD BLACK POWDER COATED STEEL
 - MECHANICALLY ATTACHED POLE CAP

2 TRUEBOUNCE POST AND BLACKBOARD
 NOT TO SCALE

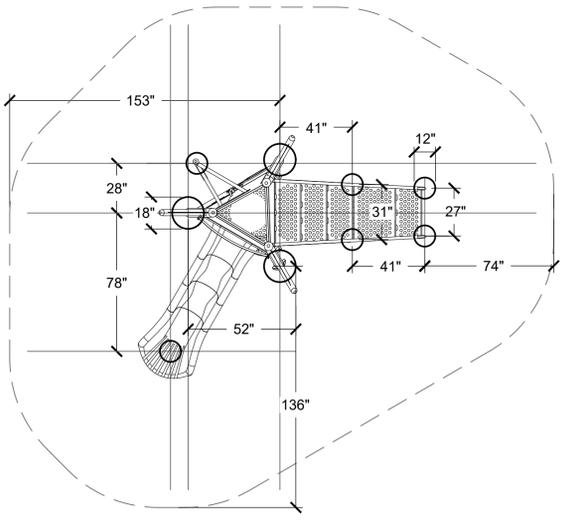


3 PLAYWORLD SLIDE FOOTING LOCATIONS
 NOT TO SCALE

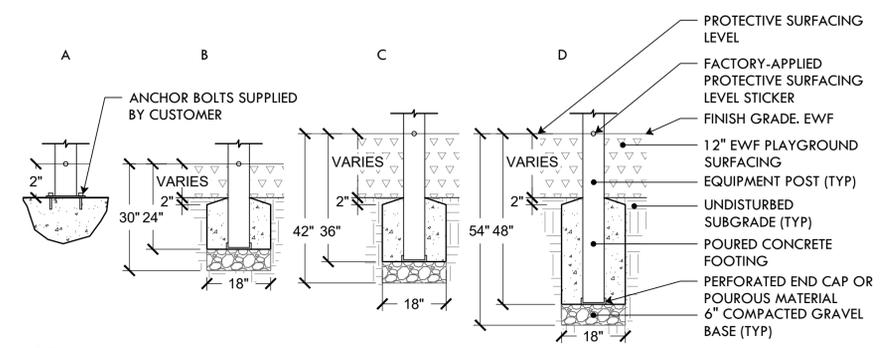


- NOTE:**
- A - SURFACE MOUNT DETAIL
 B - COMPONENT FOOTING DETAIL
 C - SUPPORT POST, SPIRAL SLIDE AND ROCKBLOCKS POST FOOTING DETAIL
 D - GROUNDZERO, CANTILEVER AND "T" POST FOOTING DETAIL
 - SEE DETAIL XX FOR PLAYWORLD GATEWAY DESCENT SLIDE FOOTING LAYOUT

4 PLAYWORLD SLIDE FOOTING TYPES
 NOT TO SCALE

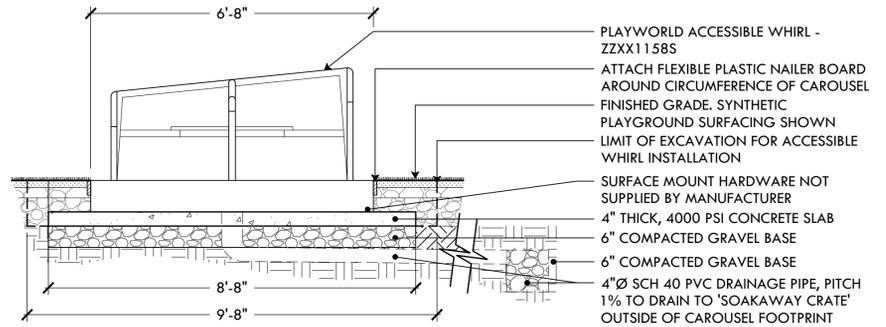

- NOTES:**
- LOCATE 4" DRAINAGE PIPE AND SOAKAWAY CRATE OUTSIDE OF THE ACCESSIBLE WHIRL FOOTPRINT.
 - WRAP SOAKAWAY CRATE W/ 8 oz FILTER FABRIC

5 PLAYWORLD ACCESSIBLE WHIRL #ZZX1158S - SURFACE MOUNT FOOTING
 NOT TO SCALE

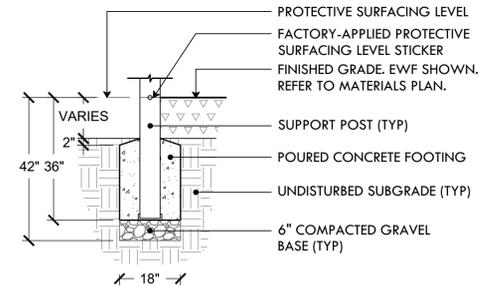

- NOTE:**
- SUPPORT POST FOOTING DEPTH EQUALS 42 IN. LESS THAN THE DEPTH OF THE PROTECTIVE SURFACING MATERIAL. THE POST IS DESIGNED TO HAVE 24" IN CONCRETE.
 - DO NOT ENCASE BOTTOM OF SUPPORT POST IN CONCRETE. PLACE POST DIRECTLY ON PACKED STONE OR POROUS BLOCK.

6 PLAYWORLD SPIN CUP #ZZX0065 - FOOTING
 NOT TO SCALE

FILE: CABR23.01-PLANS.dwg



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPIING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
Site Improvements at Cabral Park
515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW





SCALE

DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE
Construction Details

L-9.5

18 OF 23

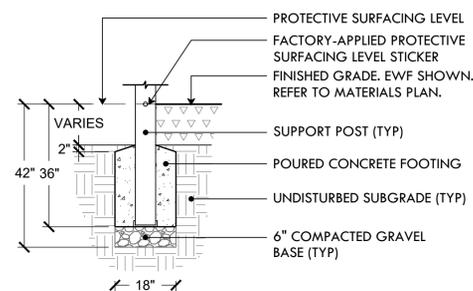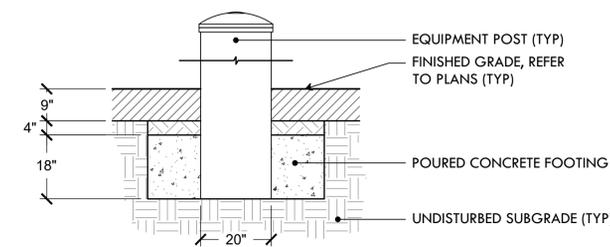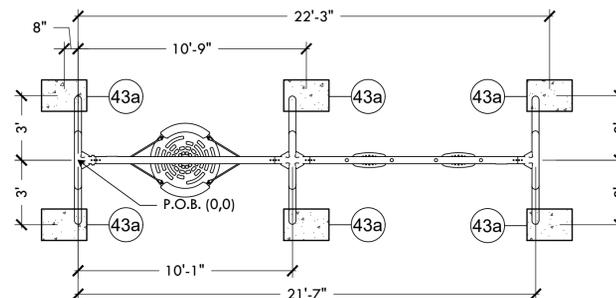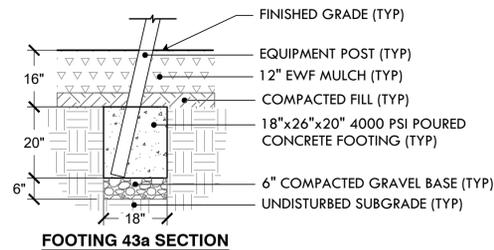


NOTE:
1. SUPPORT POST FOOTING DEPTH EQUALS 42 IN. LESS THAN THE DEPTH OF THE PROTECTIVE SURFACING MATERIAL. THE POST IS DESIGNED TO HAVE 24\"/>

1 PLAYWORLD TOT SWING #ZZXX0822 - FOOTING
NOT TO SCALE

2 KOMPAN TWO-BAY SWING W/ NEST FOOTING #KSW92009-0910
NOT TO SCALE



3 KOMPAN COMPOSITE PLAY STRUCTURE #PCMS727384 - FOOTING
NOT TO SCALE

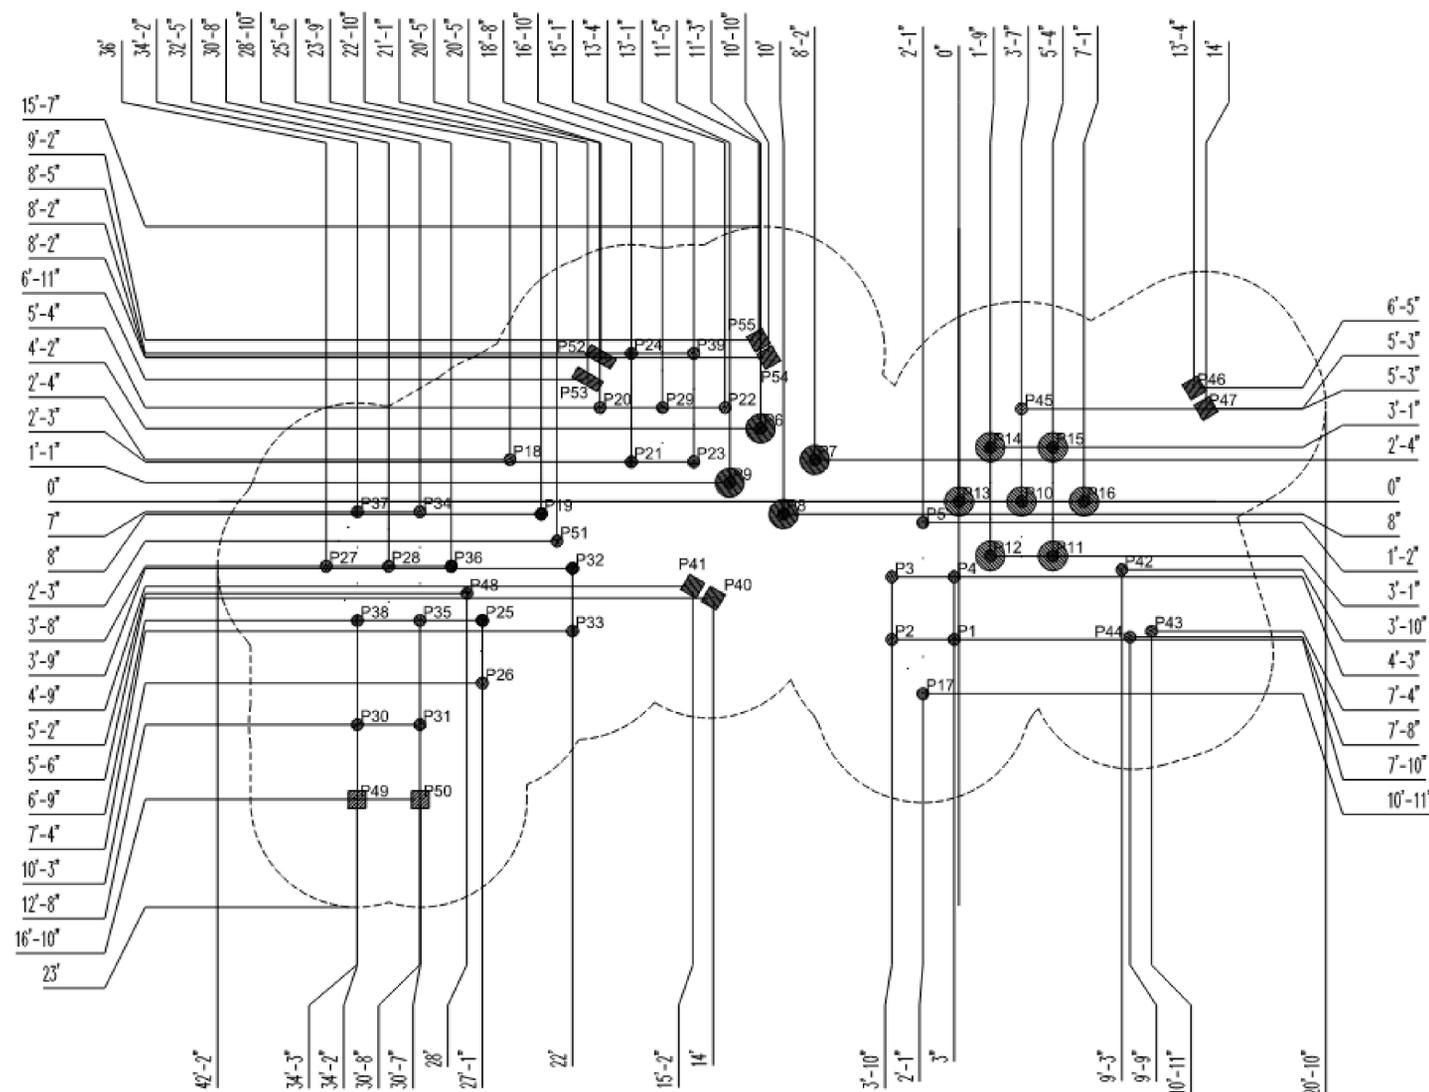


4 KOMPAN COMPOSITE PLAY STRUCTURE #PCMS727384 - FOOTING LOCATIONS
NOT TO SCALE



5 EARTHSCAPE SMALL ROUND WOBBLE BOARD SURFACE MOUNT
NOT TO SCALE

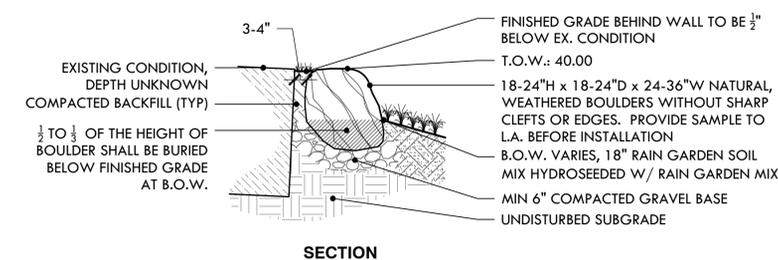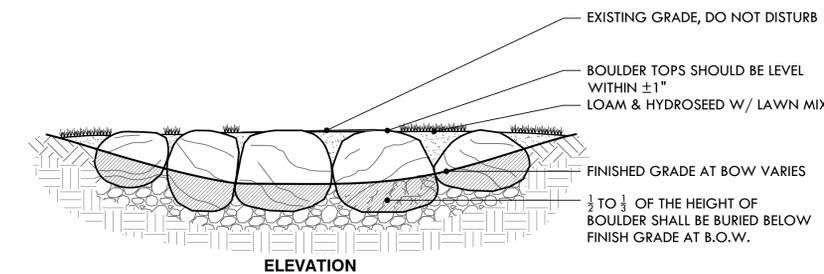


6 BOULDER EMBANKMENT
NOT TO SCALE

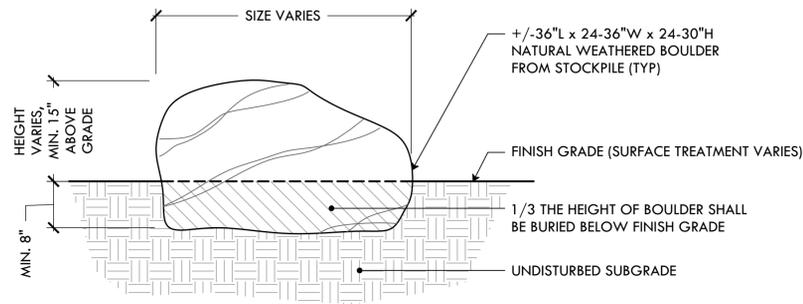


BOULDER QUANTITY:
 (7) 42 - 48"
 (12) 36 - 42"
 (10) 30 - 36"
 (EXCLUDING BOULDERS IN
 SCRAMBLE & EMBANKMENT)


1 BOULDER IN LANDSCAPE
 NOT TO SCALE

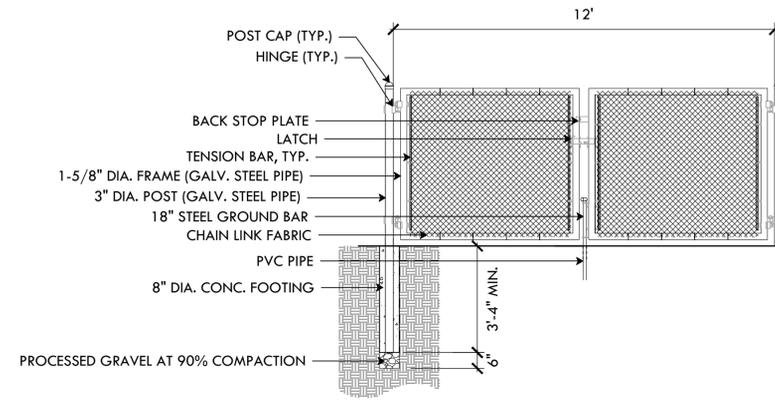


2 12' WIDE CHAIN LINK GATE
 NOT TO SCALE

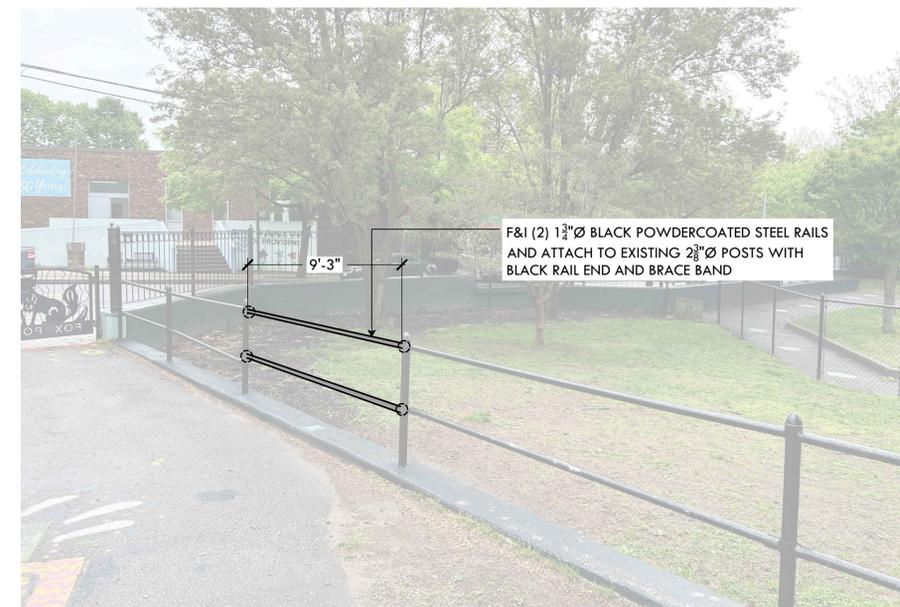


3 HORIZONTAL RAILING INSERT ON EXISTING RETAINING WALL
 NOT TO SCALE

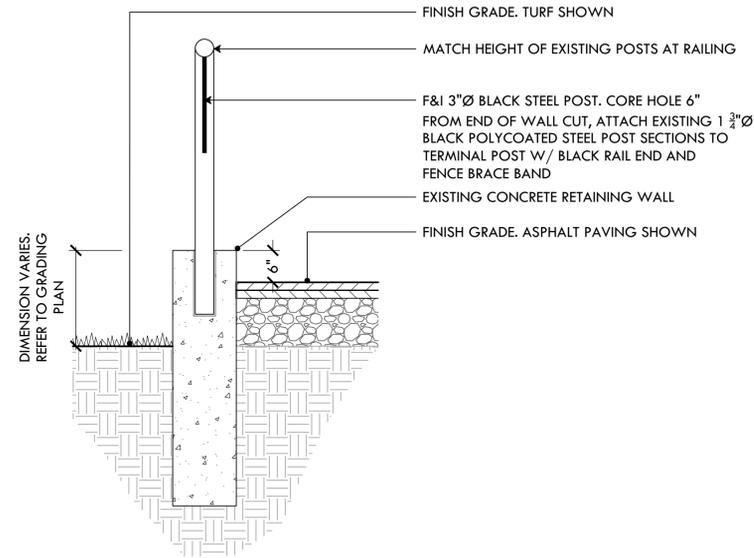

**4 3\"/>
 NOT TO SCALE**

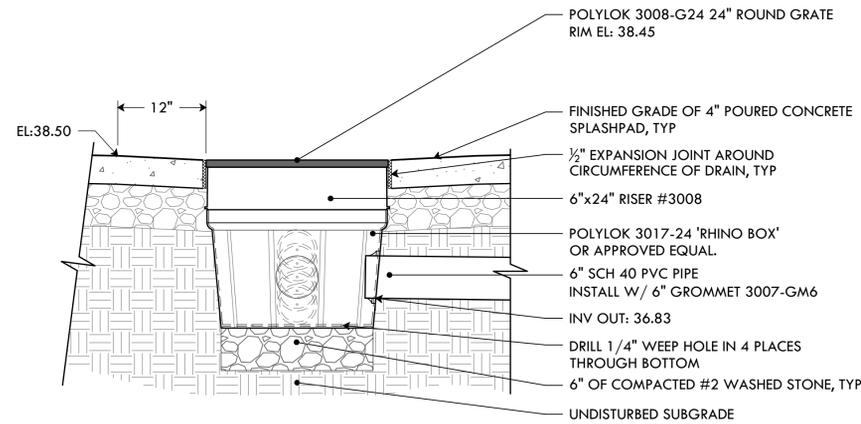

**5 24\"/>
 NOT TO SCALE**

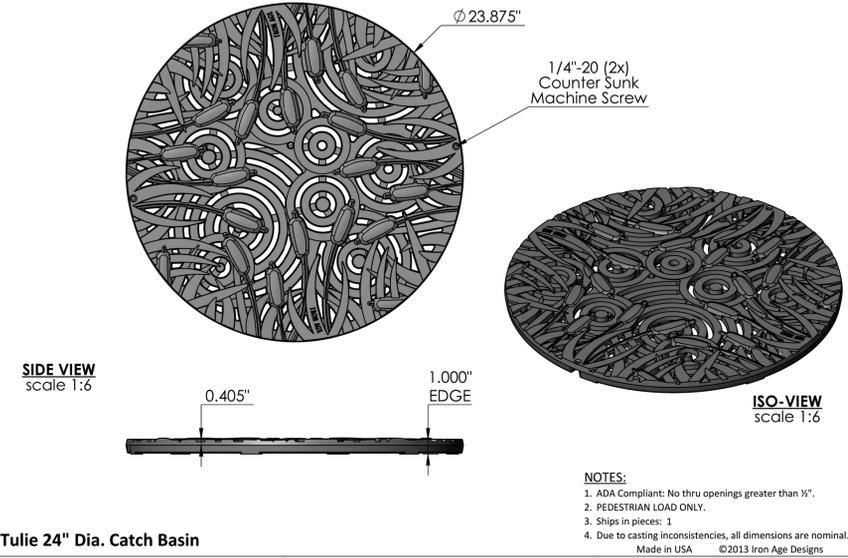

**6 24\"/>
 NOT TO SCALE**

7 MASONRY WALL END PATCH
 NOT TO SCALE



**PROVIDENCE
 PARKS DEPARTMENT**
 DALRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF
 PROVIDENCE PARKS
 DEPARTMENT, ALL RIGHTS
 RESERVED 2026.
 NO PART OF THIS DOCUMENT MAY BE
 REPRODUCED, STORED IN A RETRIEVAL
 SYSTEM OR TRANSMITTED IN ANY FORM OR
 BY ANY MEANS, ELECTRONIC,
 MECHANICAL, PHOTOCOPYING,
 RECORDING OR OTHERWISE WITHOUT THE
 PRIOR WRITTEN PERMISSION OF THE CITY
 OF PROVIDENCE PARKS DEPARTMENT. ANY
 MODIFICATIONS TO THIS DOCUMENT
 WITHOUT THE WRITTEN PERMISSION OF
 THE CITY OF PROVIDENCE PARKS
 DEPARTMENT SHALL RENDER IT INVALID
 AND UNUSABLE.

STAMP

PROJECT:
**Site Improvements at
 Cabral Park**
**515 Wickenden Street
 Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW


SCALE

DRAWING INFO
 DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG

SHEET TITLE
**Construction
 Details**



L-9.6

19 OF 23

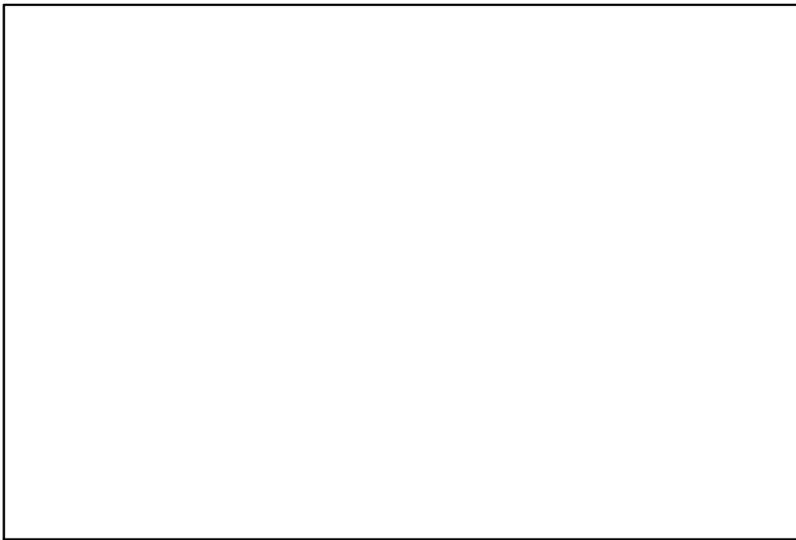

1 VORTEX SPLASHPAD MANIFOLD
NOT TO SCALE


FRONT ELEVATION VIEW SIDE ELEVATION VIEW PLAN VIEW

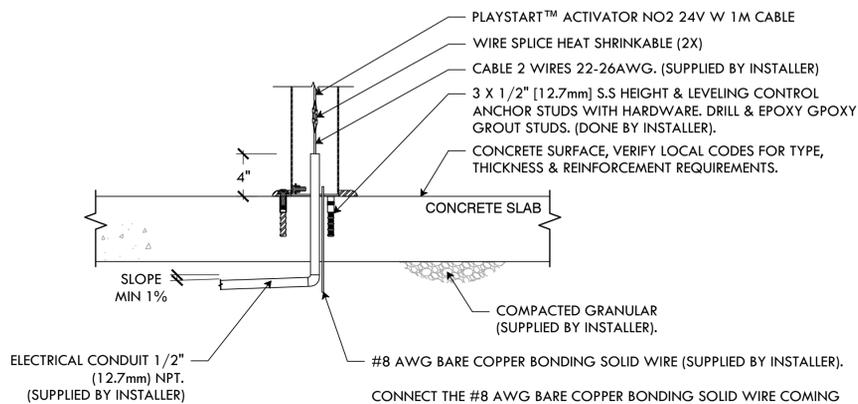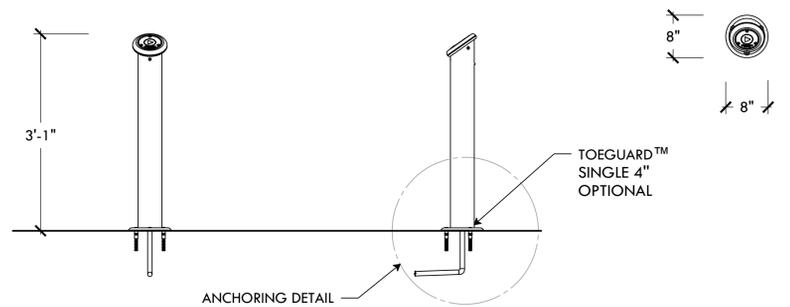

- NOTES:
- "BY INSTALLER/BY CONTRACTOR" MAY REFER TO SERVICE PROVIDERS OTHER THAN THE EQUIPMENT MANUFACTURER. PLEASE REFER TO PROJECT SPECIFICATION FOR DETAILS OF RESPONSIBILITY.
 - ANCHOR FOR CONCRETE INSTALLATION INSTRUCTIONS:
 - DRILL $\frac{3}{8}$ " (15.875mm) HOLE, MIN. HOLE DEPTH $4\frac{1}{8}$ " (104.8mm).
 - CLEAN THE HOLE.
 - FILL EPOXY ADHESIVE INTO HOLE TO APPROXIMATELY $\frac{1}{3}$ TO HALF FULL.
 - INSERT ANCHOR INTO HOLE.
 - ALLOW EPOXY TO CURE PRIOR TO APPLYING MAXIMUM LOAD.
 - CONNECT THE ACTIVATOR CABLE TO THE CABLE THAT CONNECTS TO THE ELECTRICAL BOX (CABLE SUPPLIED BY INSTALLER), USING WIRE SPLICE HEAT SHRINKABLE.
 - CRIMP WIRE SPLICE.
 - HEAT WIRE SPLICE (MAKE SURE NOT TO HEAT WIRE TO AVOID DAMAGING THEM)


2 VOR 0622 - ACTIVATOR NO.4
NOT TO SCALE

- NOTES:
- "BY INSTALLER/BY CONTRACTOR" MAY REFER TO SERVICE PROVIDERS OTHER THAN THE EQUIPMENT MANUFACTURER. PLEASE REFER TO PROJECT SPECIFICATION FOR DETAILS OF RESPONSIBILITY.
 - POLYMER ENCAPSULATED ASSEMBLY. NO EARTH GROUNDING AND NO BONDING RECOMMENDED FOR SPRAYLINK™ SYSTEM. FOLLOW LOCAL CODE.
 - REFER TO INSTALLATION GUIDE FOR MORE DETAILS.

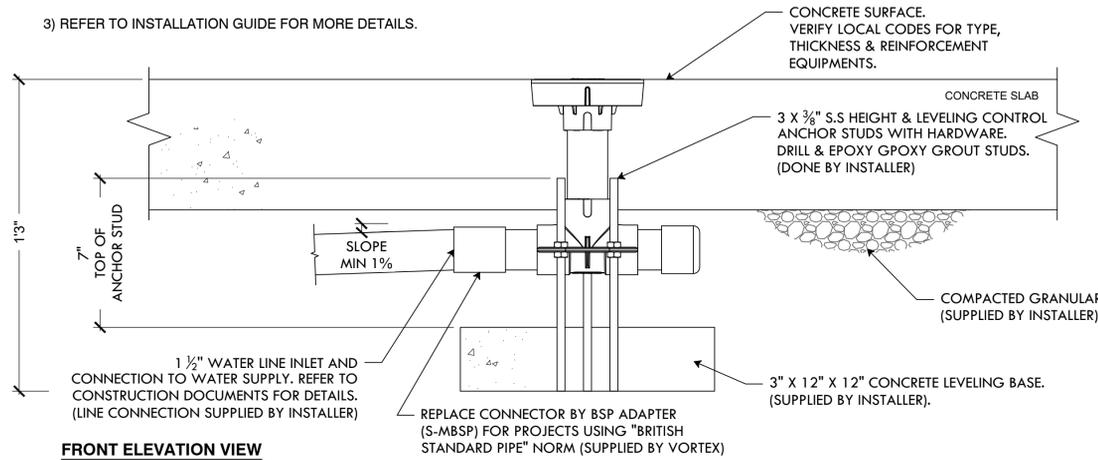


3 VOR 3000 = SPRAYLINK JET NO.1
NOT TO SCALE





- NOTES:
- "BY INSTALLER/BY CONTRACTOR" MAY REFER TO SERVICE PROVIDERS OTHER THAN THE EQUIPMENT MANUFACTURER. PLEASE REFER TO PROJECT SPECIFICATION FOR DETAILS OF RESPONSIBILITY.
 - POLYMER ENCAPSULATED ASSEMBLY. NO EARTH GROUNDING AND NO BONDING RECOMMENDED FOR SPRAYLINK™ SYSTEM. FOLLOW LOCAL CODE.
 - REFER TO INSTALLATION GUIDE FOR MORE DETAILS.

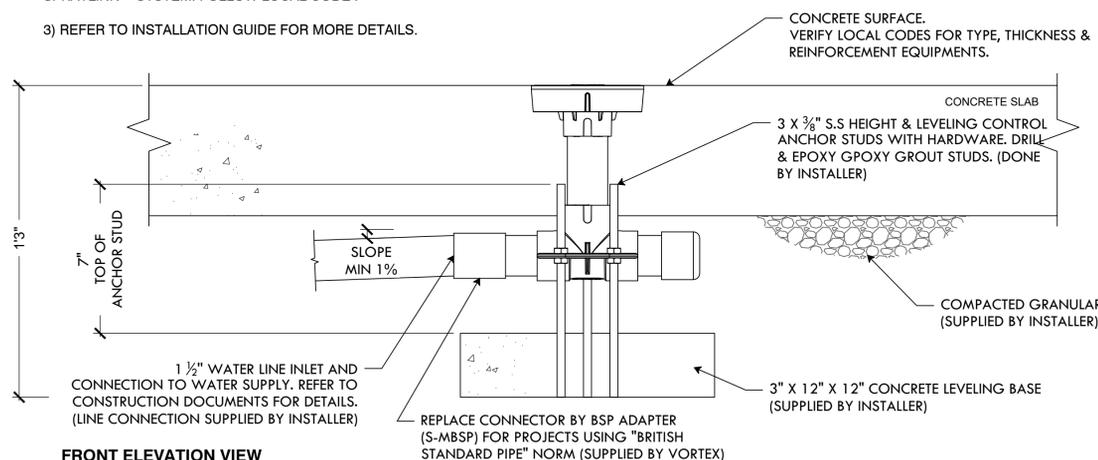

4 VOR 3005 - SPRAYLINK GEYSER
NOT TO SCALE

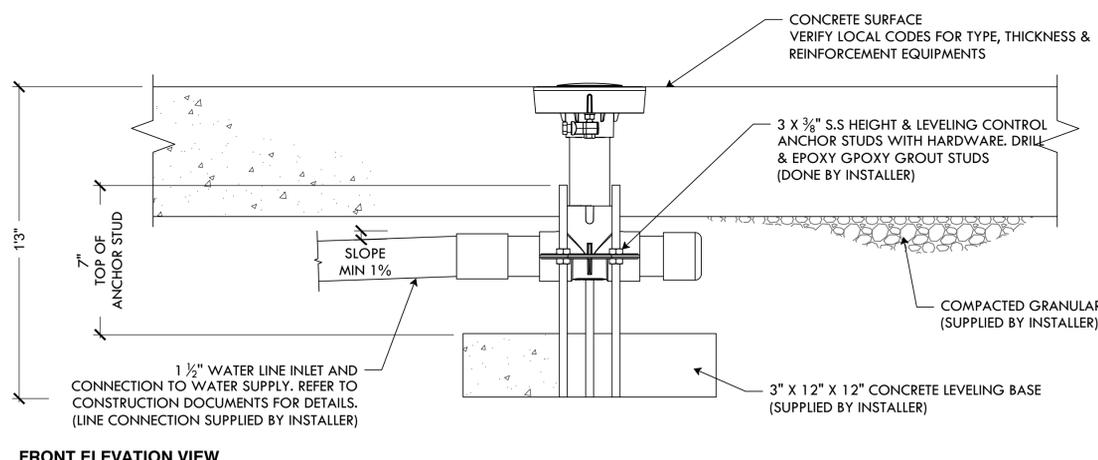

5 VOR 3006 - SPRAYLINK BLOOM
NOT TO SCALE

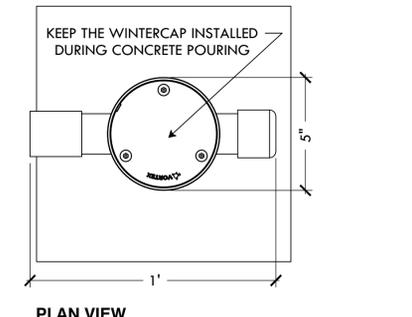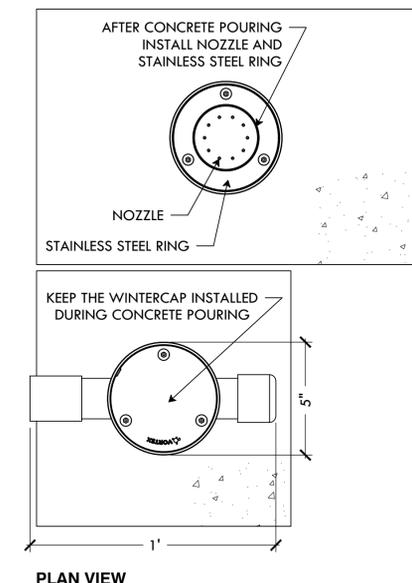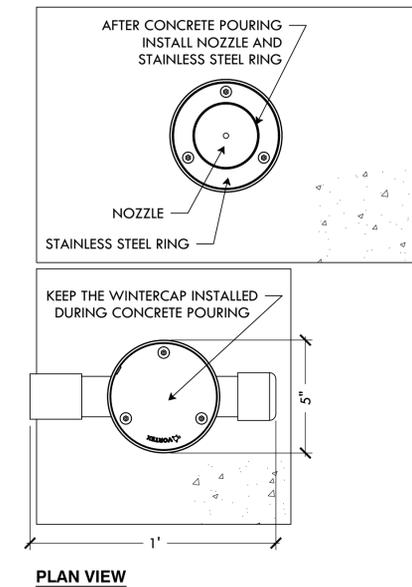

PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.
NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:
Site Improvements at Cabral Park
515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO
DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE
Construction Details

FILE: CABR23.01-PLANS.dwg



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:

Site Improvements at Cabral Park

**515 Wickenden Street
Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE


DRAWING INFO

DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

**Construction
Details -
Splashpad
L-9.8**


21 OF 23

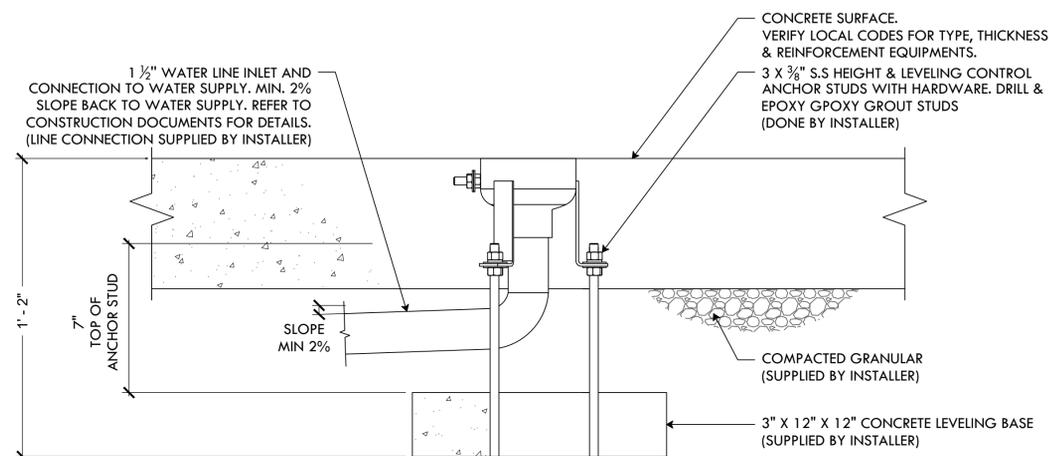

FRONT ELEVATION VIEW

1 VOR 7010 - WATER JELLY NO.1

NOT TO SCALE

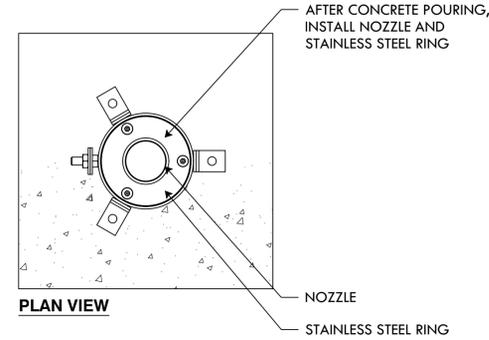

PLAN VIEW


NOTES:

1. "BY INSTALLER/BY CONTRACTOR" MAY REFER TO SERVICE PROVIDERS OTHER THAN THE EQUIPMENT MANUFACTURER. PLEASE REFER TO PROJECT SPECIFICATION FOR DETAILS OF RESPONSIBILITY.
2. POLYMER ENCAPSULATED ASSEMBLY. NO EARTH GROUNDING AND NO BONDING RECOMMENDED FOR SPRAYLINK™ SYSTEM. FOLLOW LOCAL CODE.
3. REFER TO INSTALLATION GUIDE FOR MORE DETAILS.

Ø1'-8"


FRONT ELEVATION VIEW

SIDE ELEVATION VIEW

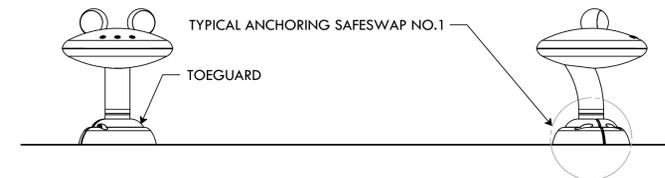


4 VOR 7201 - FROG NO.2

NOT TO SCALE

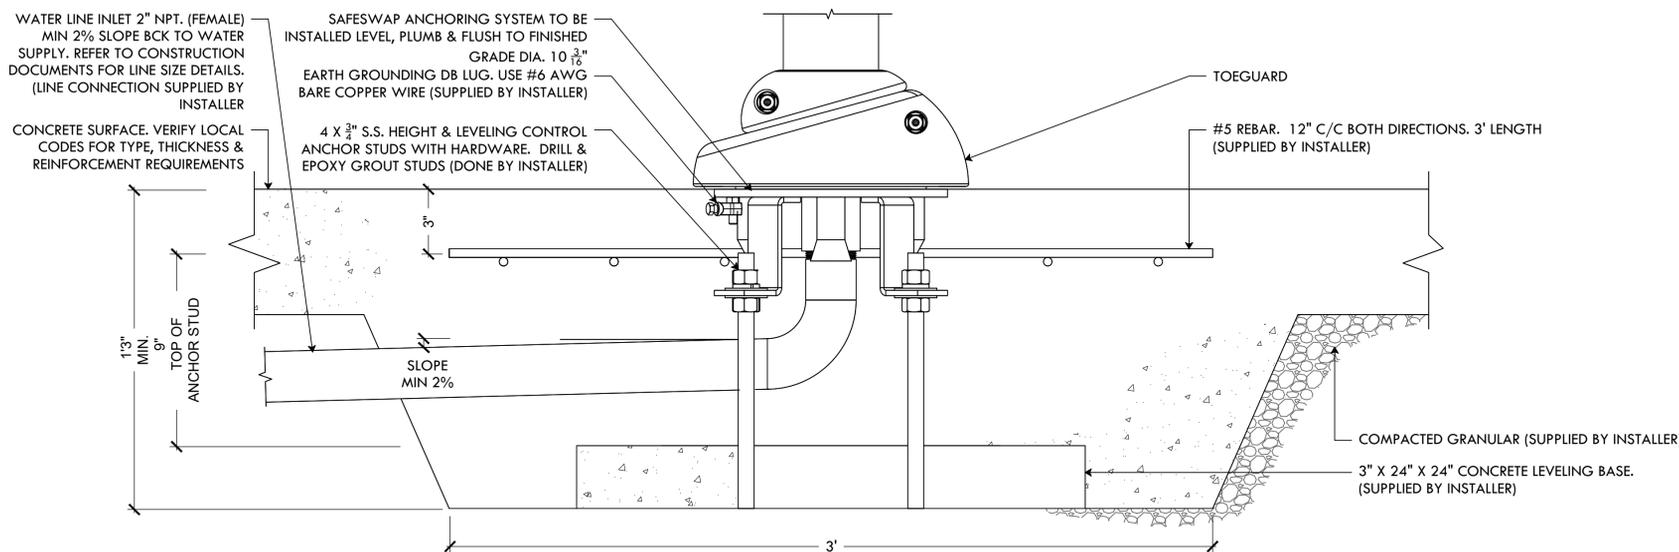


2 VORTEX SAFESWAP NO.1 LARGE FOOTING - VOR 7200, 7217, 7270

NOT TO SCALE




FRONT ELEVATION VIEW

SIDE ELEVATION VIEW

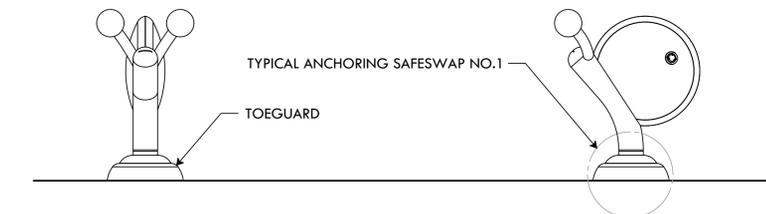

5 VOR 7217 - SNAIL NO.4

NOT TO SCALE

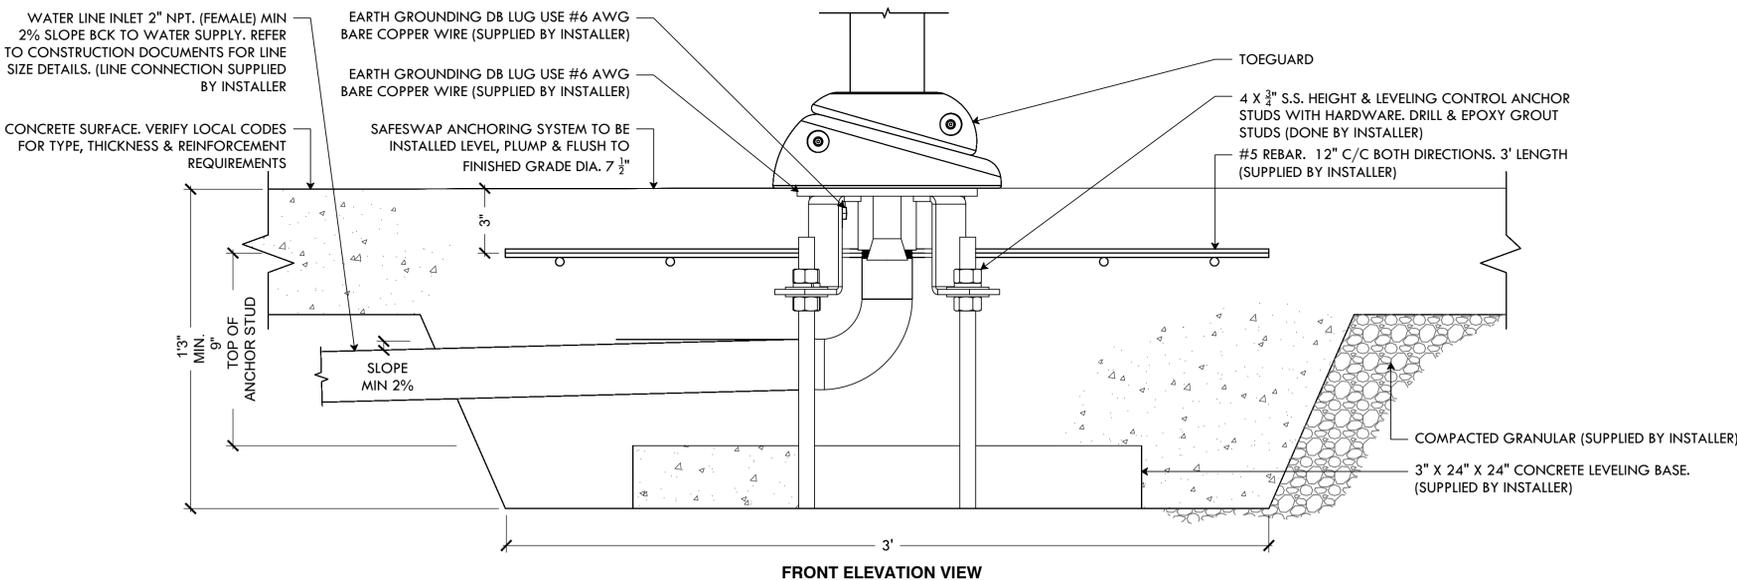


3 VORTEX SAFESWAP NO.2 MEDIUM FOOTING - VOR 7719, 7782, 7538

NOT TO SCALE

FRONT ELEVATION VIEW


SIDE ELEVATION VIEW

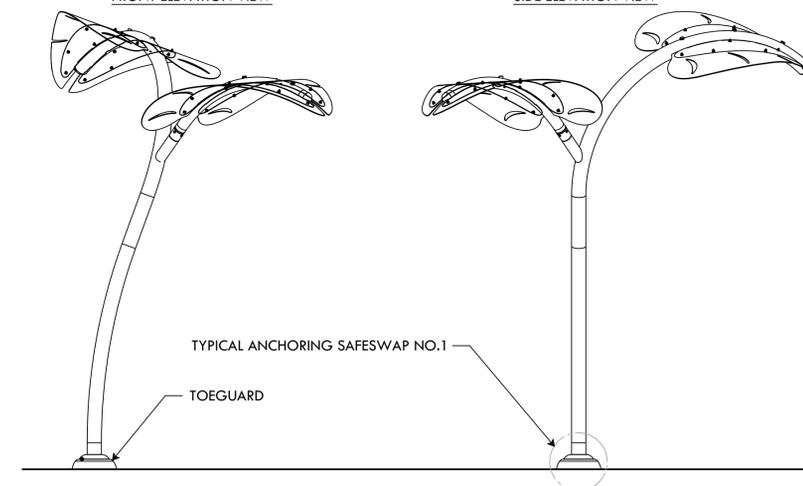

6 VOR 7270 - DOUBLE LEAVES


NTS

FILE: CABR23.01-PLANS.dwg




FRONT ELEVATION VIEW

FRONT ELEVATION VIEW

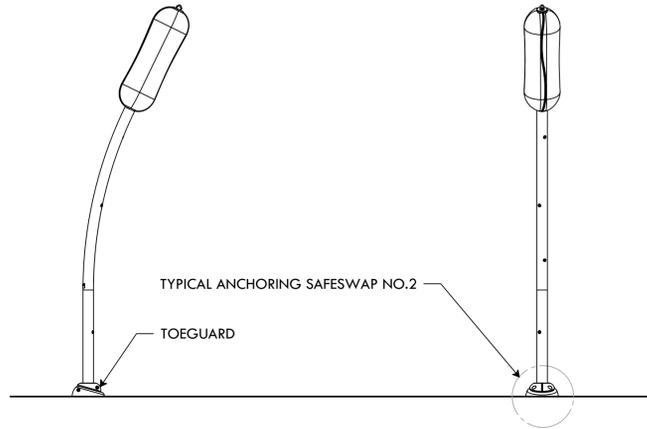


1 VOR 7538 - CATTAIL
NOT TO SCALE




FRONT ELEVATION VIEW

FRONT ELEVATION VIEW

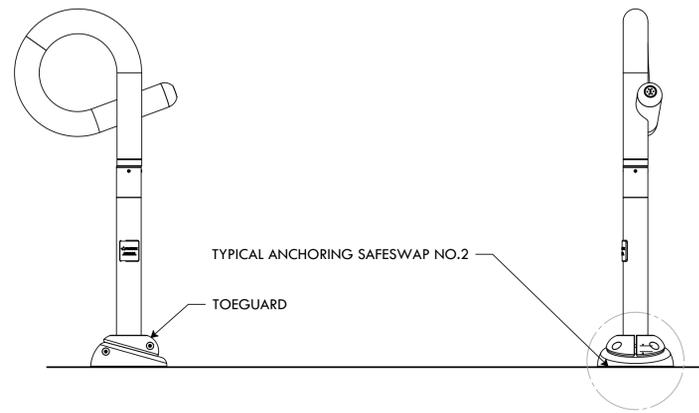


2 VOR 7719 - LOOP NO. 1
NOT TO SCALE




FRONT ELEVATION VIEW

FRONT ELEVATION VIEW

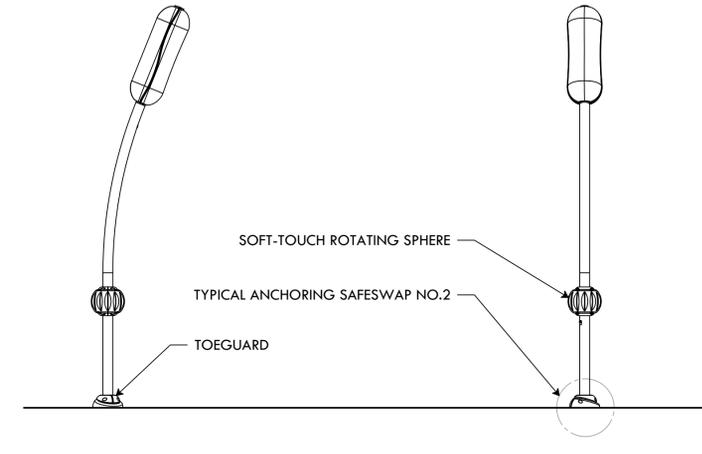


3 VOR 7782 - CATTAIL TWIRL
NOT TO SCALE

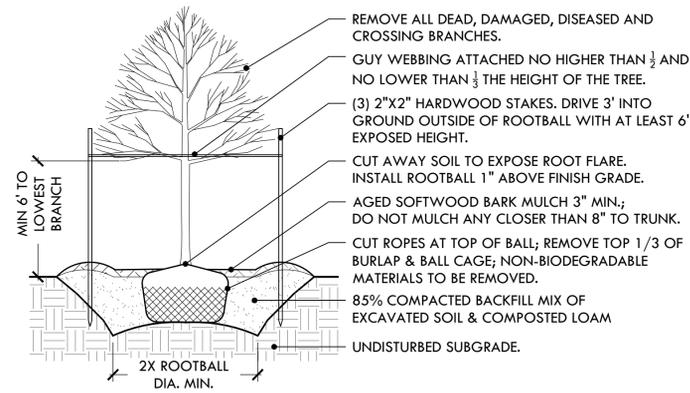


4 DECIDUOUS & EVERGREEN TREE PLANTING
NOT TO SCALE

GRASS SEED MIX	
30%	IMPROVED PERENNIAL RYE
30%	TURF TYPE TALL FESCUE
30%	CHEWINGS FESCUE
5%	CREEPING RED FESCUE
5%	MINIATURE OR DUTCH WHITE CLOVER

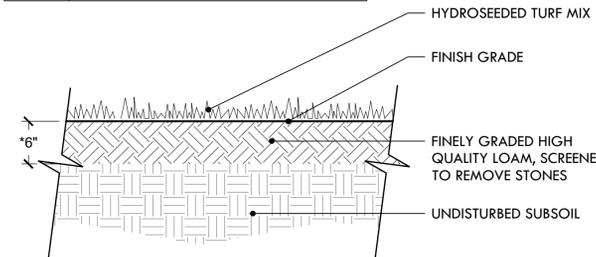


- NOTES:
1. USE A PROCESSED WOOD FIBER MULCH OR WOOD/PAPER BLEND
 2. ADD DOLOMITIC LIME AND SPECIFIED STARTER FERTILIZER TO LOAM PRIOR TO HYDROSEEDING
 3. *DEPTH OF LOAM MAY BE LESS THAN 6" IN AREAS OF TRANSITION (FEATHERING) TO EXISTING LAWN AND FOR REPAIR TO DISTURBED AREAS.
 4. LIGHTLY DISTURBED AREAS TO BE AERATED, TOP-DRESSED W/ LOAM & SLICE-SEEDED.

5 LOAM & HYDROSEED
NOT TO SCALE

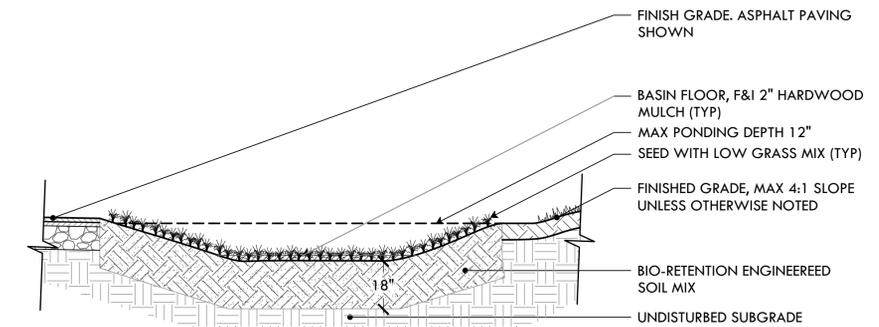

- NOTES:
1. BIORETENTION SOIL MIX TO CONSIST OF 85% LOAMY SAND BLENDED WITH 35% SCREENED, HIGH QUALITY COMPOST.
 2. MULCH TO BE CLEAN WOOD CHIPS ABLE TO PASS THROUGH A 1" SEIVE.

6 BIO RETENTION BASIN / SAND FILTER
NOT TO SCALE

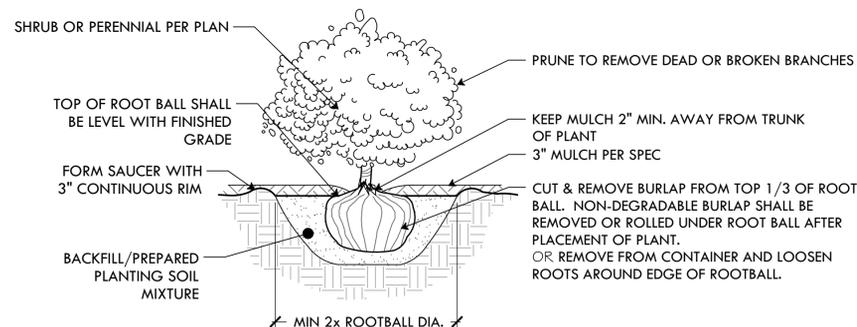

7 SHRUB PLANTING
NOT TO SCALE



PROVIDENCE PARKS DEPARTMENT
DALRYMPLE BOATHOUSE
ROGER WILLIAMS PARK
PROVIDENCE, RI 02905



Providence Parks

COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP

PROJECT:

Site Improvements at Cabral Park

515 Wickenden Street
Providence, RI

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO

DATE ISSUED: 01/28/2026
PROJECT NO: CPPG.23.01
DRAWN BY: NC/SG
CHECKED BY: MG

SHEET TITLE

Construction Details

L-9.9


22 OF 23

SPLASHPAD DIMENSION

TOTAL AREA : 3158 ft² 293m²
 SPRAY AREA : 2169 ft² 202m²
 GRID SIZE : 10 x 10 ft 3 x 3 m

PRODUCT LEGEND

REF	PRODUCT	QTY	GPM	LPM
A	Loop N°1 VOR 7719	2	10.0	37.8
B	Activator N°4 VOR 0622	1	0.0	0.0
C	Spraylink™ Jet N°1 VOR 3000	3	7.5	28.5
D	Spraylink™ Geysier VOR 3005	2	10.0	37.8
E	Spraylink™ Bloom VOR 3006	2	16.0	60.6
F	Water Jelly N°1 VOR 7010	3	18.0	68.1
G	Frog N°2 VOR 7201	1	4.0	15.1
H	Cattail Twirl VOR 7782	1	3.0	11.4
I	Double Leaves VOR 7270	1	8.0	30.3
J	Cattail VOR 7538	2	8.0	30.4
K	Snail N°4 VOR 7217	1	6.5	24.6
L	Playsafe Drain N°4 VOR 1004	1	0.0	0.0
		QTY	GPM	LPM
TOTAL		20	91.0	344.6

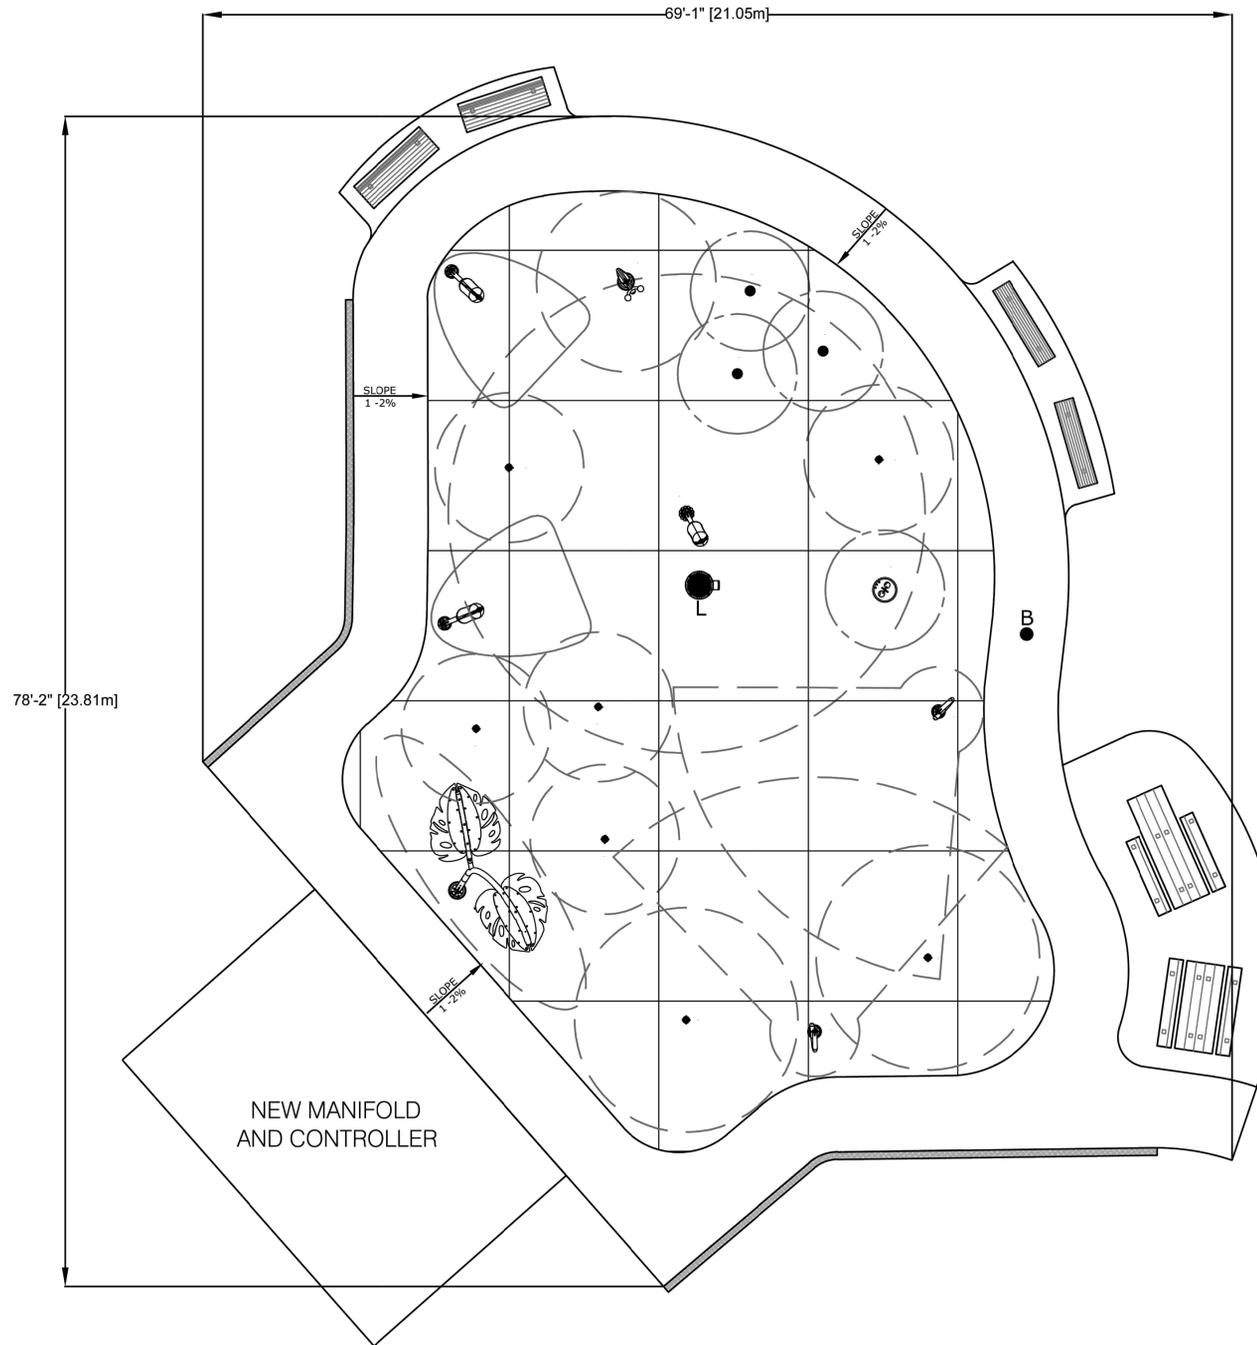

NOTE: DRAINS REQUIRED BY OTHER, AS PER LOCAL CODE
 5'[1.5m] SPRAY FREE CONCRETE AREA ALL AROUND THE SPLASHPAD
 DISCLAIMER * SPRAY ZONE EXCEEDING THE WET ZONE MAY RESULT INTO OVERSPRAY BEYOND THE RECOMMENDED SPLASHPAD SPRAY FREE/DRY ZONE AND WILL BE THE CUSTOMER'S RESPONSIBILITY.

Cabral Park, Rhode Island

44139 Version_E

Jan 27, 2026

SPLASHPAD LAYOUT DRAWING

SCALE : **NOT TO SCALE**

COPYRIGHT VORTEX AQUATIC STRUCTURES INTERNATIONAL 2006-THIS DOCUMENTS AND THE IDEAS, RENDERINGS AND OTHER CONTENTS CONTAINED THEREIN ARE THE SOLE PROPERTY OF VORTEX AQUATIC STRUCTURES INTERNATIONAL AND MAY NOT BE DISSEMINATED, COPIED, REPRODUCED OR OTHERWISE USED WITHOUT PRIOR WRITTEN CONSENT OF VORTEX AQUATIC STRUCTURES INTERNATIONAL.

11" X 17" sheet size



**PROVIDENCE
 PARKS DEPARTMENT**
 DALRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



**Providence
 Parks**

COPYRIGHT (C) CITY OF
 PROVIDENCE PARKS
 DEPARTMENT, ALL RIGHTS
 RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE
 REPRODUCED, STORED IN A RETRIEVAL
 SYSTEM OR TRANSMITTED IN ANY FORM OR
 BY ANY MEANS, ELECTRONIC,
 MECHANICAL, PHOTOCOPYING,
 RECORDING OR OTHERWISE WITHOUT THE
 PRIOR WRITTEN PERMISSION OF THE CITY
 OF PROVIDENCE PARKS DEPARTMENT. ANY
 MODIFICATIONS TO THIS DOCUMENT
 WITHOUT THE WRITTEN PERMISSION OF
 THE CITY OF PROVIDENCE PARKS
 DEPARTMENT SHALL RENDER IT INVALID
 AND UNUSABLE.

STAMP

PROJECT:

**Site Improvements at
 Cabral Park**

**515 Wickenden Street
 Providence, RI**

REVISIONS:

#	Date	Issued For:
-	-	-
-	-	-
-	-	-

NORTH ARROW

SCALE

DRAWING INFO

DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG

SHEET TITLE

**Splashpad
 Layout**

L-10

23 OF 23

FILE: CABR23.01-PLANS.dwg



PROVIDENCE PARKS DEPARTMENT
 DAIRYMPLE BOATHOUSE
 ROGER WILLIAMS PARK
 PROVIDENCE, RI 02905



COPYRIGHT (C) CITY OF PROVIDENCE PARKS DEPARTMENT, ALL RIGHTS RESERVED 2026.

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT. ANY MODIFICATIONS TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF THE CITY OF PROVIDENCE PARKS DEPARTMENT SHALL RENDER IT INVALID AND UNUSABLE.

STAMP


PROJECT:
 Site Improvements at Cabral Park

515 Wickenden Street
 Providence, RI

REVISIONS:

#	Date	Issued For:

NORTH ARROW




SCALE
 0 5' 10' 20'
 SCALE: 1"=10'

DRAWING INFO

DATE ISSUED: 01/28/2026
 PROJECT NO: CPPG.23.01
 DRAWN BY: NC/SG
 CHECKED BY: MG

SHEET TITLE
 -sketch-

L-X
 X OF 23

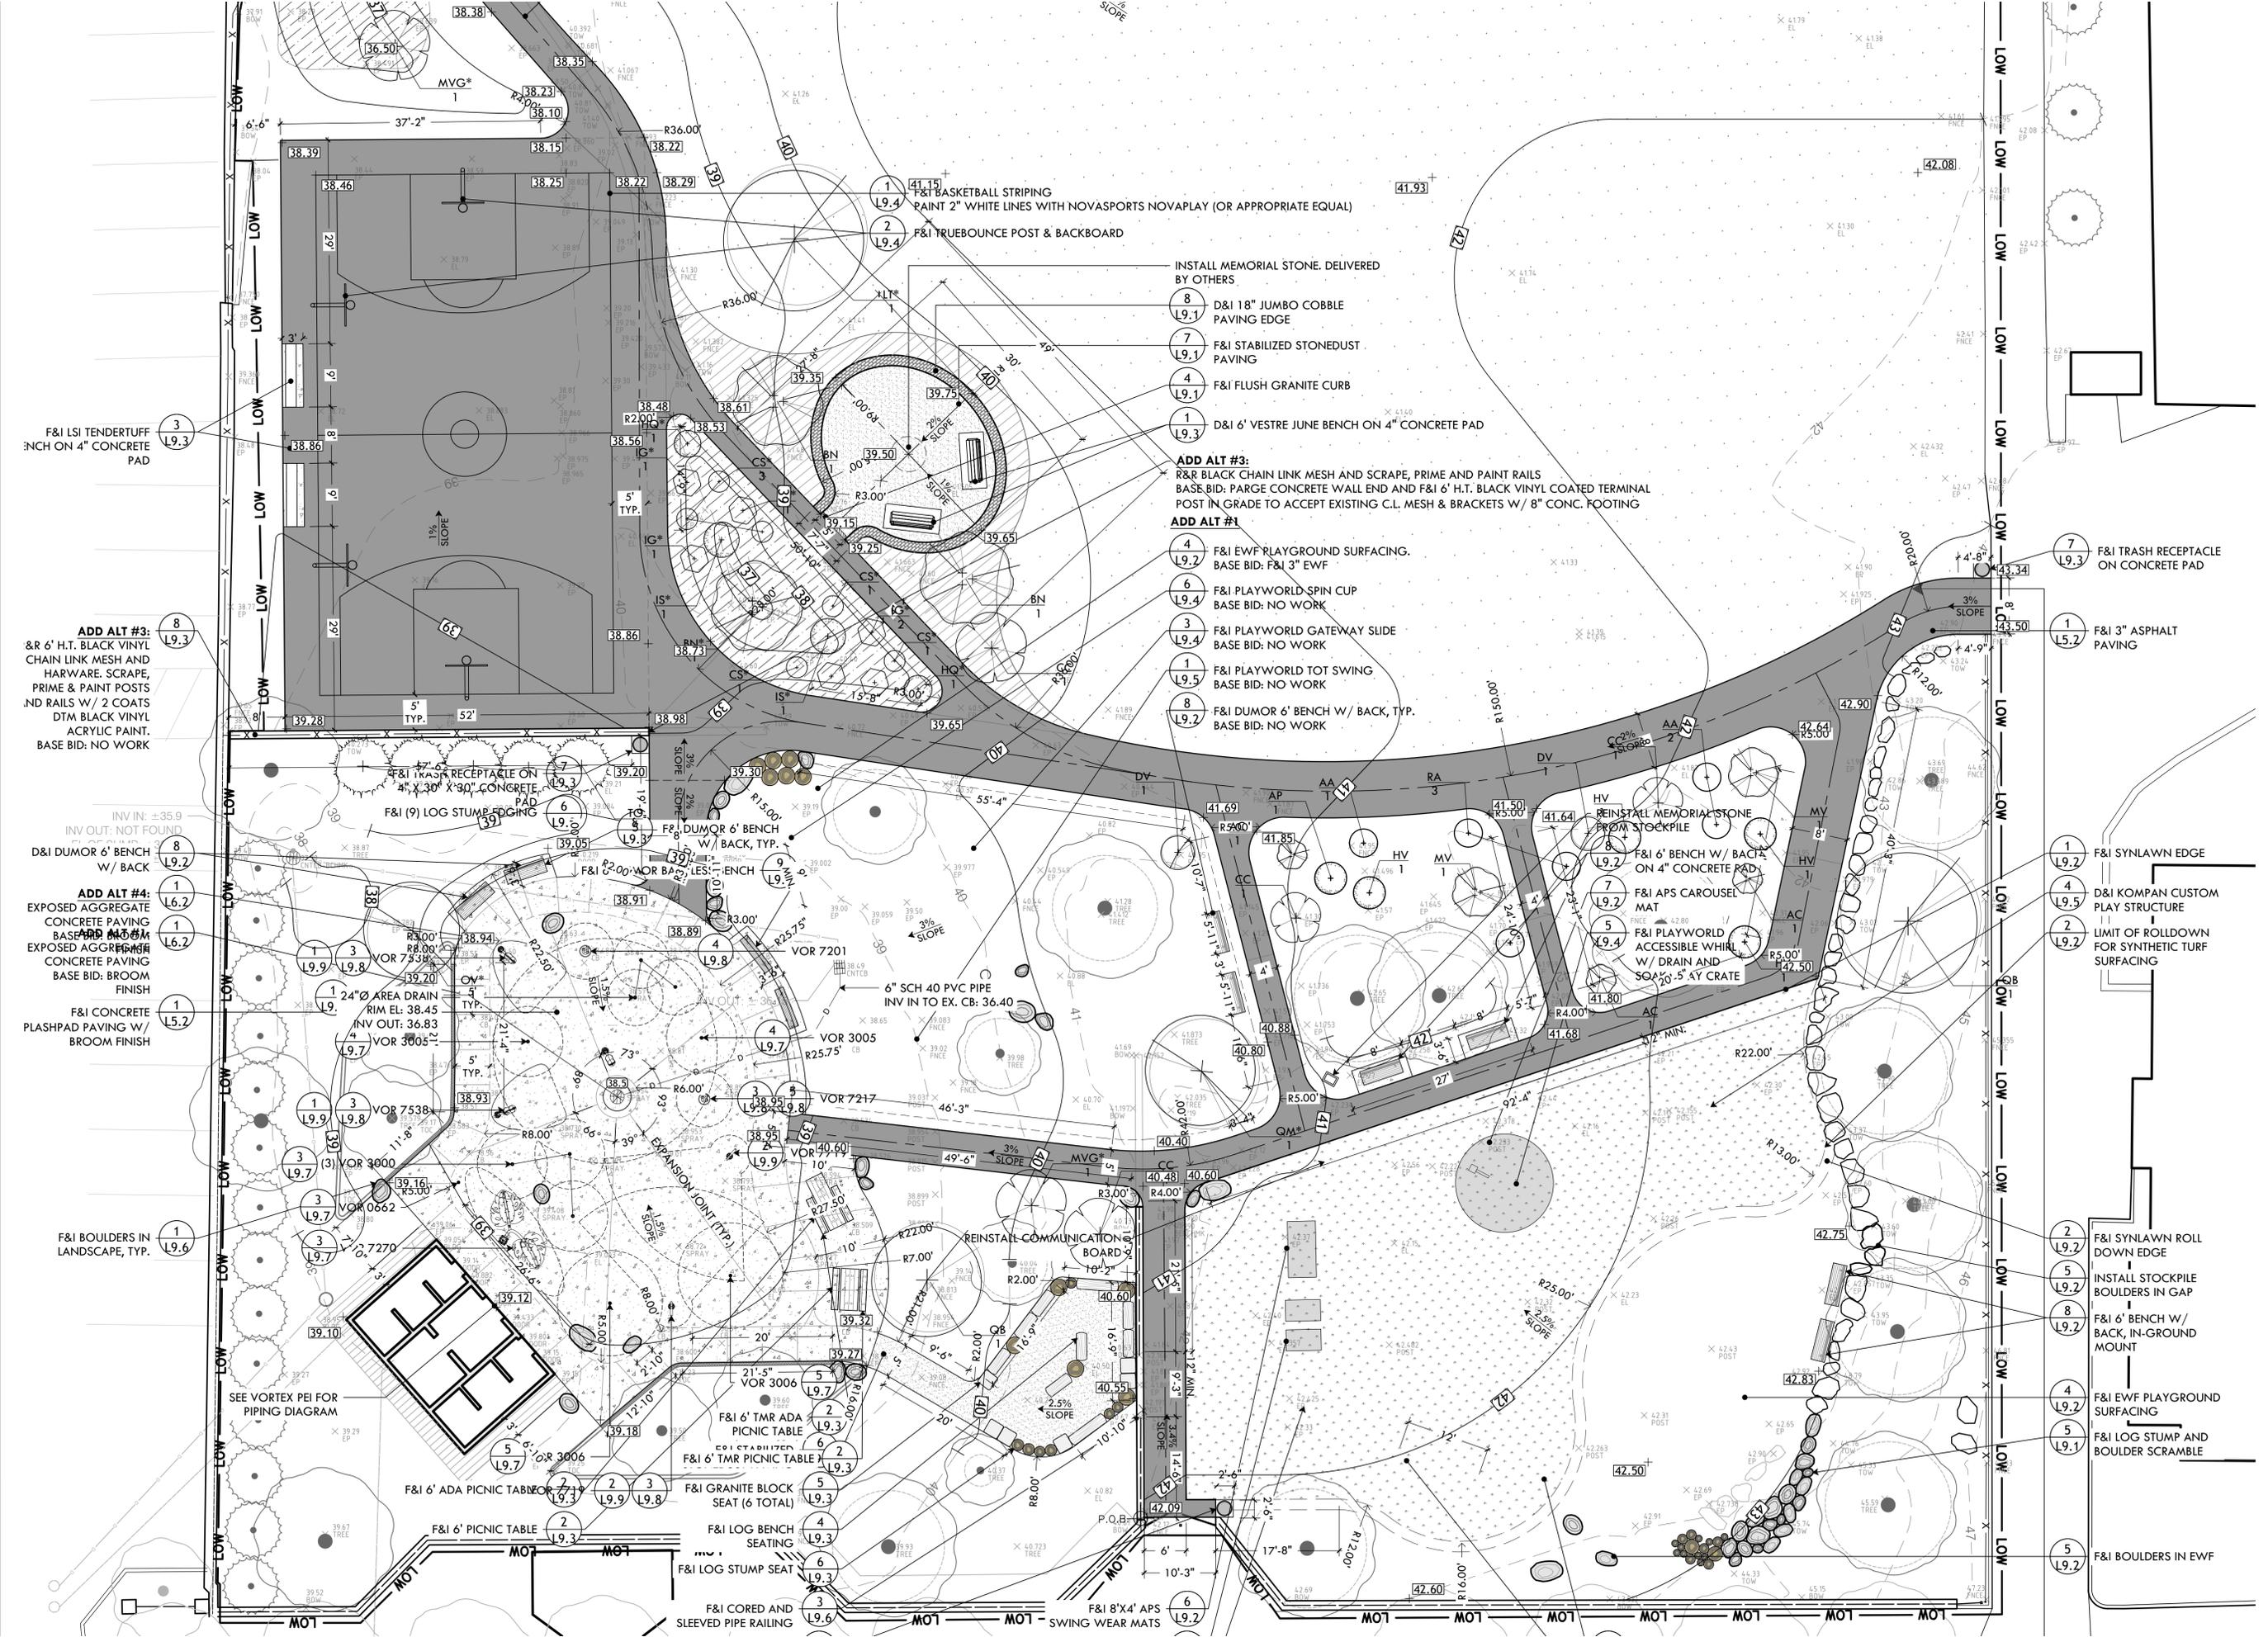

- 8 L9.1 D&I 18" JUMBO COBBLE PAVING EDGE
- 7 L9.1 F&I STABILIZED STONEDUST PAVING
- 4 L9.1 F&I FLUSH GRANITE CURB
- 1 L9.3 D&I 6' VESTRE JUNE BENCH ON 4" CONCRETE PAD

ADD ALT #3:
 R&R BLACK CHAIN LINK MESH AND SCRAPE, PRIME AND PAINT RAILS BASE BID, PARGE CONCRETE WALL END AND F&I 6' H.T. BLACK VINYL COATED TERMINAL POST IN GRADE TO ACCEPT EXISTING C.L. MESH & BRACKETS W/ 8" CONC. FOOTING

- ADD ALT #1:**
- 4 L9.2 F&I EWF PLAYGROUND SURFACING. BASE BID: F&I 3" EWF
 - 6 L9.4 F&I PLAYWORLD SPIN CUP BASE BID: NO WORK
 - 3 L9.4 F&I PLAYWORLD GATEWAY SLIDE BASE BID: NO WORK
 - 1 L9.5 F&I PLAYWORLD TOT SWING BASE BID: NO WORK
 - 8 L9.2 F&I DUMOR 6' BENCH W/ BACK, TYP. BASE BID: NO WORK

ADD ALT #3:
 R&R 6' H.T. BLACK VINYL CHAIN LINK MESH AND HARDWARE, SCRAPE, PRIME & PAINT POSTS AND RAILS W/ 2 COATS DTM BLACK VINYL ACRYLIC PAINT. BASE BID: NO WORK

ADD ALT #4:
 EXPOSED AGGREGATE CONCRETE PAVING BASE BID: NO WORK
 EXPOSED AGGREGATE CONCRETE PAVING BASE BID: BROOM FINISH
 F&I CONCRETE PLASHPAD PAVING W/ BROOM FINISH

7 L9.3 F&I TRASH RECEPTACLE ON CONCRETE PAD

1 L5.2 F&I 3" ASPHALT PAVING

1 L9.2 F&I SYNLAWN EDGE

4 L9.5 D&I KOMPAN CUSTOM PLAY STRUCTURE

2 L9.2 LIMIT OF ROLLDOWN FOR SYNTHETIC TURF SURFACING

2 L9.2 F&I SYNLAWN ROLL DOWN EDGE

5 L9.2 INSTALL STOCKPILE BOULDERS IN GAP

8 L9.2 F&I 6' BENCH W/ BACK, IN-GROUND MOUNT

4 L9.2 F&I EWF PLAYGROUND SURFACING

5 L9.1 F&I LOG STUMP AND BOULDER SCRAMBLE

5 L9.2 F&I BOULDERS IN EWF

F&I CORED AND SLEEVED PIPE RAILING
 F&I 8'X4' APS SWING WEAR MATS

F&I 6' ADA PICNIC TABLE
 F&I 6' PICNIC TABLE

F&I GRANITE BLOCK SEAT (6 TOTAL)
 F&I LOG BENCH SEATING
 F&I LOG STUMP SEAT

F&I 6' TMR ADA PICNIC TABLE
 F&I 6' TMR PICNIC TABLE

REINSTALL COMMUNICATION BOARD
 REINSTALL MEMORIAL STONE FROM STOCKPILE

F&I 6' BENCH W/ BACK ON 4" CONCRETE PAD
 F&I APS CAROUSEL MAT
 F&I PLAYWORLD ACCESSIBLE WHIRL W/ DRAIN AND SOA 20" 5' AT CRATE

F&I TRASH RECEPTACLE ON 4" X 30" X 30" CONCRETE PAD
 F&I (9) LOG STUMP EDGING

F&I LSI TENDERTUFF BENCH ON 4" CONCRETE PAD

8 L9.3

3 L9.3

8 L9.3

